

E-Series Surface Mount Mixer
810 – 1000 MHz

EFM-900
V2


Features

- LO Power +13 dBm
- +22dB Compression Point
- +30dBm IIP3
- +32 dBm IIP3 Down Converting
- Surface Mount
- Up and Down converting
- Tape and reel packaging available

Description

M/A Com's EFM-900 uses a novel, patent pending design to achieve very high linearity at low LO drive levels. Typically IP3 performance is +30dBm with an LO drive level of just +13dBm. The mixer combines PHEMT devices and carefully matched transformers in a surface mount package which can be used for both up and down converting. It is ideally suited for wireless applications where high linearity is required. Parts are packaged in tape & reel.

SM - 108 - Non Hermetic Package

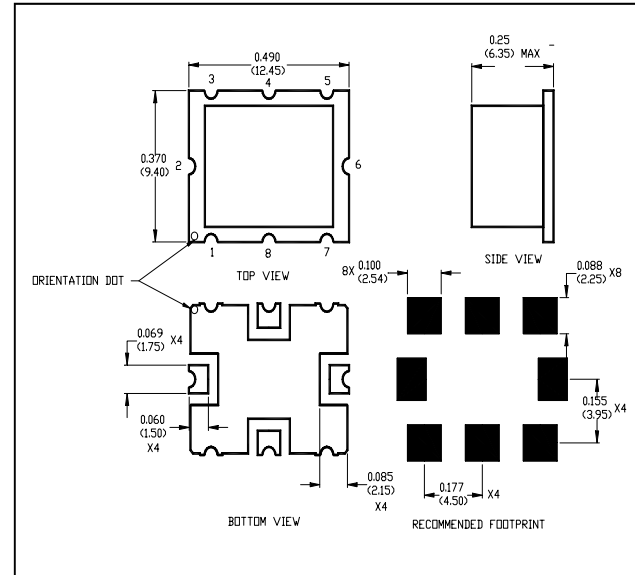

Electrical Specifications: $T_A = 25^\circ\text{C}$, $Z_0 = 50\Omega$ ¹

Parameter	Test Conditions	Frequency	Units	Min	Typ	Max
RF Frequency	DC bias 6V ± 0.3V	810 - 1000	MHz	—	—	—
LO Frequency	DC bias 6V ± 0.3V	700 - 1000	MHz	—	—	—
IF Frequency	DC bias 6V ± 0.3V	10 - 100	MHz	—	—	—
Conversion Loss	—	810 - 1000	dB	-	8.5	9.5
Isolation	LO to RF	700 - 1000	dB	18.0	22.0	—
Isolation	LO to IF	700 - 1000	dB	25.0	33.0	—
Isolation	RF to IF	810 - 1000	dB	30.0	37.0	—
VSWR	LO	700 - 1000	—	—	1.8	—
VSWR	RF	810 - 1000	—	—	3.5	—

Ordering Information

Part Number	Package
EFM-900TR	Tape and Reel (500 piece Reel)

1

M/A-COM Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice. M/A-COM makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does M/A-COM assume any liability whatsoever arising out of the use or application of any product(s) or information.

• **North America** Tel: 800.366.2266 / Fax: 978.366.2266
 • **Europe** Tel: 44.1908.574.200 / Fax: 44.1908.574.300
 • **Asia/Pacific** Tel: 81.44.844.8296 / Fax: 81.44.844.8298

Visit www.macom.com for additional data sheets and product information.

E-Series Surface Mount Mixer
810 – 1000 MHz

EFM-900
V2


Electrical Specifications: $T_A = 25^\circ\text{C}$, $Z_0 = 50\Omega$ ¹

Parameter	Test Conditions	Frequency	Units	Min	Typ	Max
IF VSWR	—	10 - 100	—	—	1.4	—
Input IP3	Up Converting	810 - 1000	dBm	30.0	32.0	—
Input IP3	Down Converting	810 - 1000	dBm	28.0	32.0	—
Input 1dB Compression	—	810 - 1000	dBm	—	22.0	—

Pin Configuration

Pin No.	Function
1	Ground
2	LO
3	Ground
4	IF
5	Ground
6	RF
7	Ground
8	Bias

Schematic

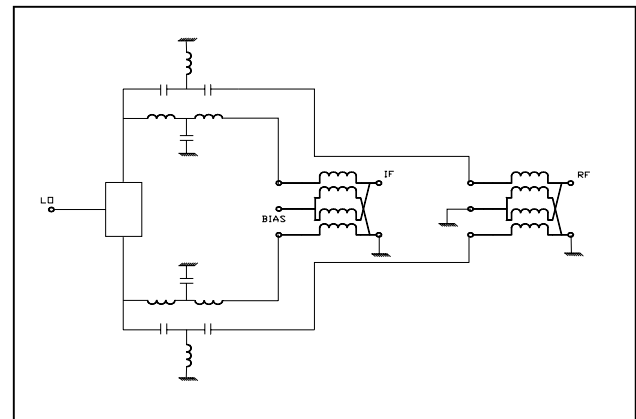


Absolute Maximum Ratings ¹

Parameter	Absolute Maximum
Max RF Power	200 mW
Peak IF Current	40 mA
Operating Temperature	-40°C to +85°C
Storage Temperature	-55°C to +125°C
ESD Rating	Zero


1. Operation of this device above any one of these parameters may cause permanent damage.

Typical Performance Curves


Conversion Loss

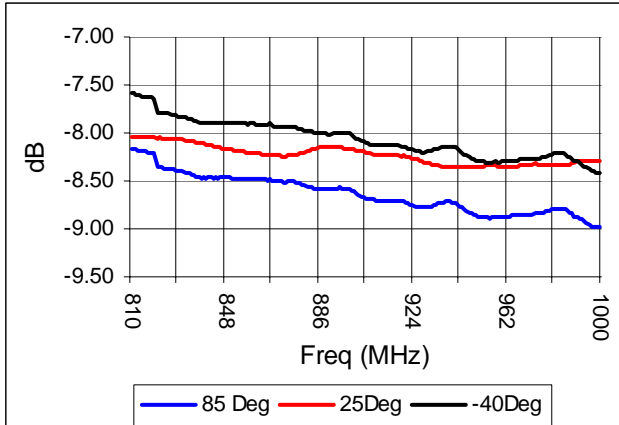


LO - RF Isolation

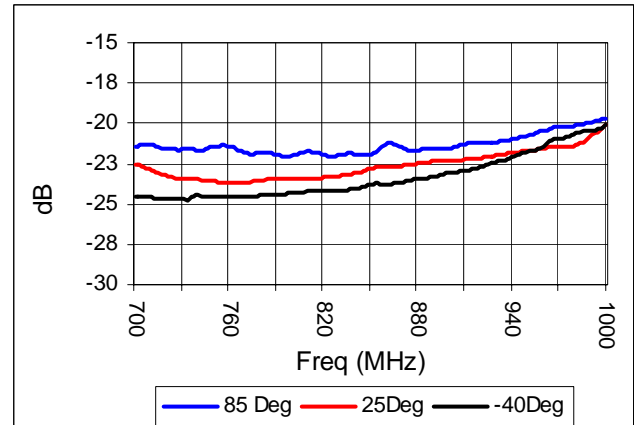

LO-IF Isolation

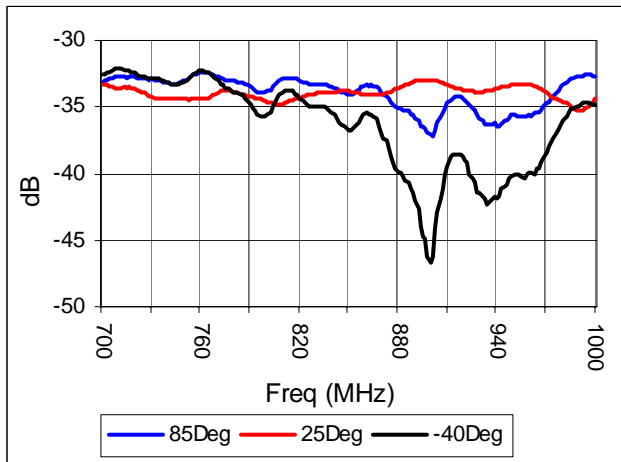

IIP3

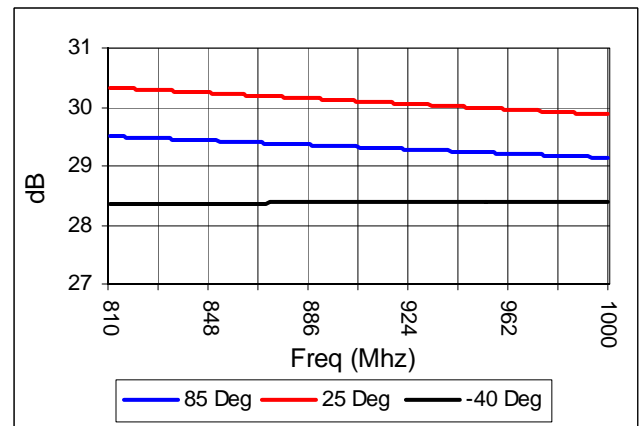

E-Series Surface Mount Mixer
810 – 1000 MHz

EFM-900
V2

Spurious Table: 810MHz

(In dBc below IF, assuming down conversion)

		nf _{LO} - mf _{RF}					
		0	X	27	32	32	45
		1	25	0	53	43	59
RF	2	77	77	54	77	77	77
(n)	3	77	77	77	77	77	77
	4	77	77	77	77	77	77
		0	1	2	3	4	

LO (m)

RF = 810 MHz, -5dBm
LO = 800 MHz, +13dBm
IF = 10 MHz

Spurious Table: 810MHz

(In dBc below IF, assuming down conversion)

		nf _{LO} - mf _{RF}					
		0	X	29	32	30	37
		1	25	0	35	48	48
RF	2	77	77	58	73	77	77
(n)	3	77	77	77	77	77	77
	4	77	77	77	77	77	77
		0	1	2	3	4	

LO (m)

RF = 810 MHz, 0dBm
LO = 710 MHz, +13dBm
IF = 100 MHz

Spurious Table: 1000MHz

(In dBc below IF, assuming down conversion)

		nf _{LO} - mf _{RF}					
		0	X	19	23	26	34
		1	29	0	48	43	52
RF	2	77	77	53	77	77	77
(n)	3	77	77	77	70	77	77
	4	77	77	77	77	77	77
		0	1	2	3	4	

LO (m)

RF = 1000 MHz, 0dBm
LO = 990 MHz, +13dBm
IF = 10 MHz

Spurious Table: 1000MHz

(In dBc below IF, assuming down conversion)

		nf _{LO} - mf _{RF}					
		0	X	20	25	27	33
		1	28	0	45	43	53
RF	2	77	77	52	77	77	77
(n)	3	77	77	77	77	77	77
	4	77	77	77	77	77	77
		0	1	2	3	4	

LO (m)

RF = 1000 MHz, 0dBm
LO = 900 MHz, +13dBm
IF = 100 MHz