

Miniature Fuse, 10.3 x 38 mm, Quick-Acting F, 250 VAC



250 VAC · Quick-Acting F



NNO

**Description**


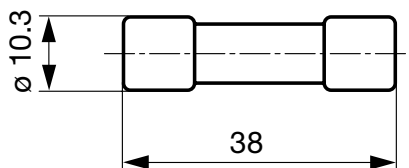
- Low Breaking Capacity

**References**[General Product Information](#)

Time-Current Curves see last page

**Weblinks**[Approvals, RoHS, CHINA-RoHS, e-Store, SCHURTER-Stock-Check, Distributor-Stock-Check](#)**Technical Data**

Rated Voltage	250 VAC
Rated Current	0.4 - 30 A
Breaking Capacity	100 A - 4000 A
Characteristic	Quick-Acting F
Mounting	Fuseholder / Clip
Admissible Ambient Air Temp.	-40 °C to 70 °C
Climatic Category	40/070/56 acc. to IEC 60068-1
Material: Terminals	Nickel-Plated Copper Alloy
Material: Tube	Glass
Material: Endcaps	Nickel-Plated Copper
Unit Weight	9 g
Storage Conditions	0 °C to 60 °C, max. 70% r.h.
Product Marking	Current Rating

**Dimensions**Length  38 mm**Pre-Arcing Time**

Rated Current In    1.1 x In min.    1.3 x In max.    3.0 x In max.

0.4 A - 30 A	60 min	60 min	1 s
--------------	--------	--------	-----

[Distributor-Stock-Check](#) | [SCHURTER-Stock-Check](#) | [e-Store](#)

### Variants

Rated Current [A]	Rated Voltage [VAC]	Breaking Capacity	Voltage Drop 1.0 In typ. [mV]	NNO	Order Number
0.4	250	1)	4200	●	7017.5150
0.5	250	1)	3600	●	7017.5120
0.63	250	1)	2400	●	7017.5130
0.8	250	1)	2300	●	7017.5140
1	250	1)	2600	●	7017.5210
1.25	250	1)	440	●	7017.5220
1.6	250	1)	630	●	7017.5230
2	250	1)	460	●	7017.5240
2.5	250	2)	360	●	7017.5250
3.15	250	2)	340	●	7017.5260
4	250	2)	230	●	7017.5270
5	250	2)	270	●	7017.5280
6.3	250	3)	220	●	7017.5290
8	250	3)	200	●	7017.5310
10	250	3)	180	●	7017.5320
12.5	250	4)	170	●	7017.5330
15	250	4)	150	●	7017.5340
16	250	4)	160	●	7017.5350
20	250	4)	100	●	7017.5360
25	250	4)	90	●	7017.5370
30	250	4)	100	●	7017.5380

1) 500 A @ 250 VAC , p.f. ≥ 0.9 / 4 kA @ 125 VAC , p.f. ≥ 0.9

2) 100 A @ 250 VAC , p.f. ≥ 0.9 / 4 kA @ 125 VAC , p.f. ≥ 0.8

3) 100 A @ 250 VAC , p.f. ≥ 0.9 / 500 A @ 125 VAC , p.f. ≥ 0.9

4) 100 A @ 250 VAC , p.f. ≥ 0.9 / 300 A @ 125 VAC , p.f. ≥ 0.9

**Packaging Unit** Small Box Pack (10 pcs.)

### Time-Current Curves

