

Ceramic, Hermetically Sealed Frequency Mixer WIDE BAND

MAC-60LH+

Level 10 (LO Power+10 dBm) 1600 to 6000 MHz

Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
RF Power	50 mW
IF Current	40 mA

Permanent damage may occur if any of these limits are exceeded.

Pin Connections

LO	10
RF	5
IF	3
GROUND	1,2,4,6,7,8,9

Features

- wide bandwidth, 1600 to 6000 MHz
- low conversion loss, 6.5 dB typ.
- excellent L-R isolation, 35 dB typ.
- LTCC double balanced mixer
- aqueous washable
- low cost
- low profile, 0.060"
- protected by US Patent 7,027,795

Applications

- PCN
- defense and weather radar
- WCDMA
- defense communications




CASE STYLE: DZ1650
PRICE: \$7.45 ea. QTY (10)

+ RoHS compliant in accordance with EU Directive (2002/95/EC)

The +Suffix has been added in order to identify RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.

Reel Size	Available Tape and Reel at no extra cost Devices/Reel
7"	10, 20, 50, 100, 200, 500
13"	1000


Outline Drawing

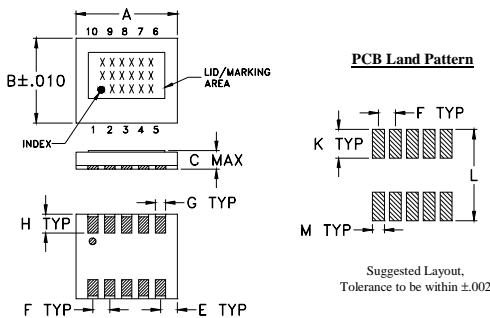

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	wt
.30	.250	.060	--	.050	.050	.030	
7.62	6.35	1.52	--	1.27	1.27	0.76	
H	J	K	L	M			grams
.056	--	.085	.270	.035			
1.42	--	2.16	6.86	0.89			0.29

Demo Board MCL P/N: TB-144 Suggested PCB Layout (PL-045)

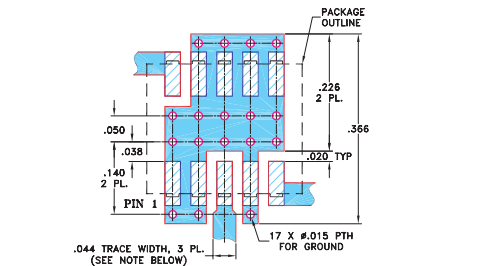

Electrical Specifications


Parameter	Min.	Typ.	Max.	Unit
Frequency Range, RF/LO	1600	—	6000	MHz
Frequency Range, IF	DC	—	2000	MHz
Conversion Loss*	—	6.5	8.3	dB
LO to RF Isolation	21	35	—	dB
LO to IF Isolation	9	15	—	dB
IP3	—	12	—	dBm
RF Input Power at 1 dB Compression	—	+5	—	dBm

*Conversion Loss at 30 MHz, increases with IF Frequency. See graphs.

Typical Performance Data

Frequency (MHz)	Conversion Loss (dB)		Isolation (dB)		VSWR RF Port (:1)		VSWR LO Port (:1)	
	RF	LO	LO +10dBm	LO +10dBm	LO +10dBm	LO +10dBm	LO +10dBm	LO +10dBm
1600.1	1630.1	7.48	30.71	17.05	2.33	4.43		
1800.1	1830.1	6.39	33.36	18.01	2.75	2.68		
2000.1	2030.1	6.30	41.31	18.60	2.87	1.91		
2200.1	2230.1	5.74	35.09	18.42	2.46	1.97		
2400.1	2430.1	5.66	36.43	18.38	2.38	1.97		
2600.1	2630.1	5.60	34.39	18.40	1.81	2.03		
2800.1	2830.1	6.07	40.26	18.93	2.35	1.97		
3000.1	3030.1	6.33	37.80	18.99	2.96	2.04		
3200.1	3230.1	6.44	37.85	18.19	2.78	2.18		
3400.1	3430.1	6.62	36.28	16.06	2.88	2.30		
3600.1	3630.1	6.81	36.30	13.97	2.65	2.47		
3800.1	3830.1	6.37	36.44	14.05	2.47	2.57		
4000.1	4030.1	6.97	37.06	14.79	2.56	2.74		
4600.1	4630.1	5.85	32.74	19.89	1.64	2.37		
5000.1	5030.1	6.38	31.45	23.17	2.53	1.51		
5200.1	5230.1	6.28	28.79	22.52	2.03	1.20		
5400.1	5430.1	6.09	25.46	20.52	2.03	1.41		
5600.1	5630.1	5.95	25.79	18.13	1.70	1.99		
5800.1	5830.1	6.16	24.02	12.28	1.32	2.88		
6000.1	6030.1	7.06	27.32	11.83	1.36	4.89		

Electrical Schematic

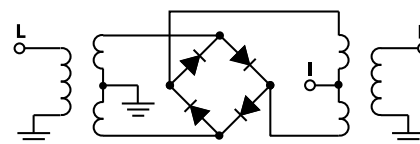

Mini-Circuits
ISO 9001 ISO 14001 AS 9100 CERTIFIED

For detailed performance specs & shopping online see web site

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at minicircuits.com









IF/RF MICROWAVE COMPONENTS

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

REV. OR
M132660
ED-14156/9
MAC-60LH+
DJ/CP/AM
120112
Page 2 of 3

Performance Charts

MAC-60LH+

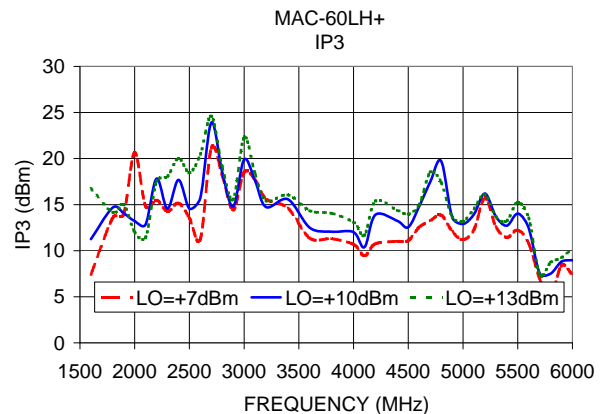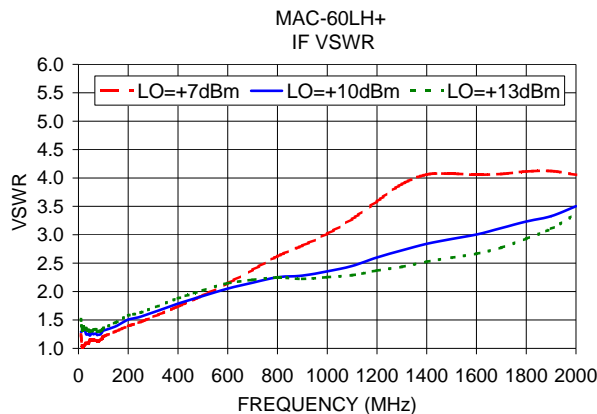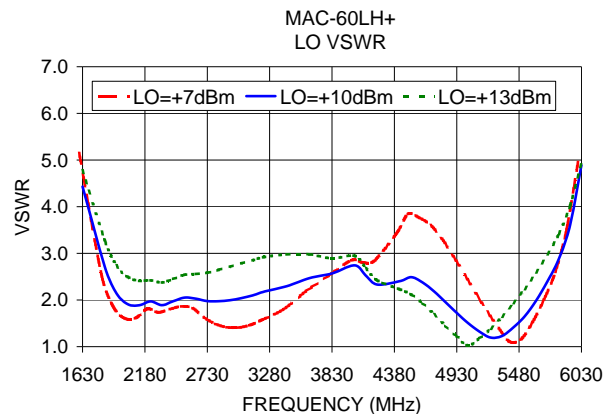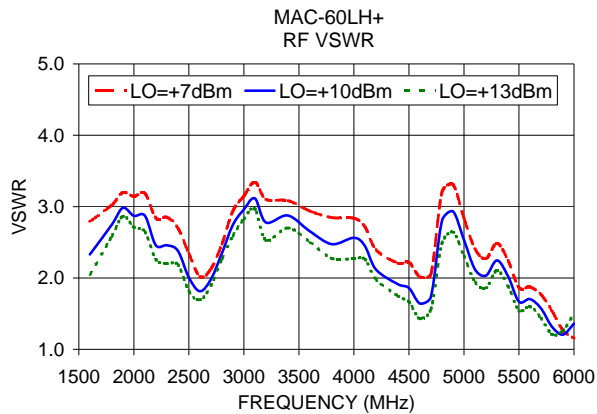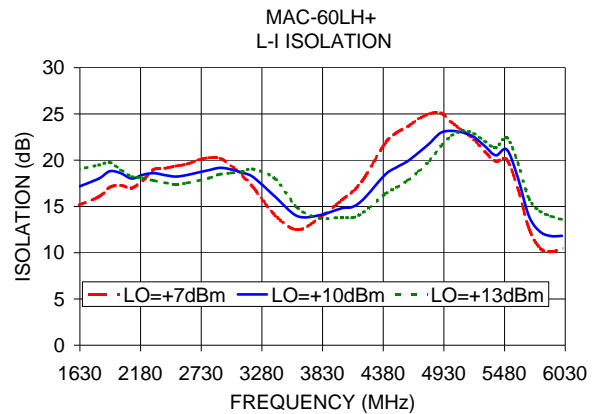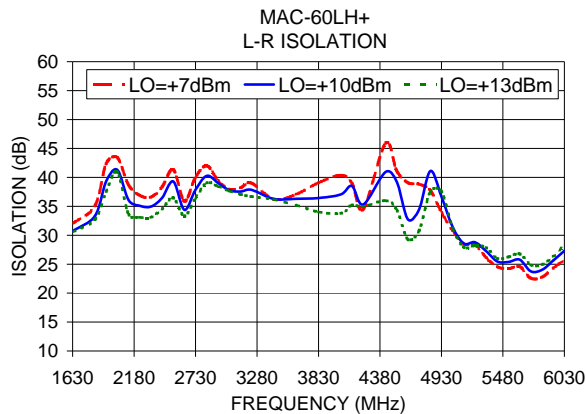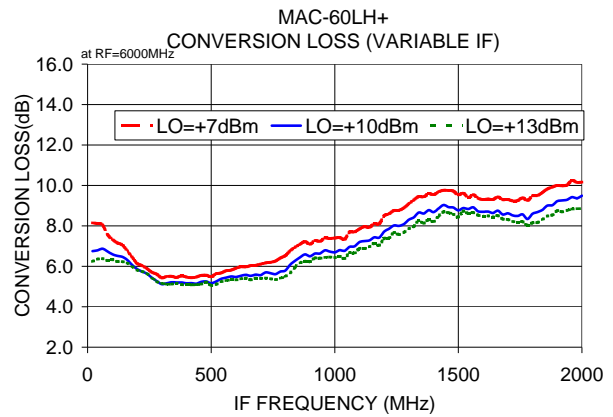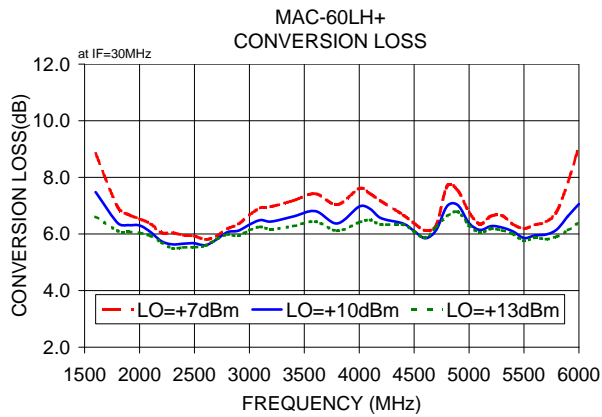

ISO 9001 ISO 14001 AS 9100 CERTIFIED

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at minicircuits.com

IF/RF MICROWAVE COMPONENTS

For detailed performance specs & shopping online see web site

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.