

International  
**IR** Rectifier

20CTQ150  
 20CTQ150S  
 20CTQ150-1

SCHOTTKY RECTIFIER

20 Amp

### Major Ratings and Characteristics







Characteristics	Values	Units
$I_{F(AV)}$ Rectangular waveform	20	A
$V_{RRM}$	150	V
$I_{FSM}$ @ tp = 5 $\mu$ s sine	1030	A
$V_F$ @ 10 Apk, $T_J = 125^\circ\text{C}$ (per leg)	0.66	V
$T_J$ range	-55 to 175	$^\circ\text{C}$

### Description/ Features

This center tap Schottky rectifier has been optimized for low reverse leakage at high temperature. The proprietary barrier technology allows for reliable operation up to  $175^\circ\text{C}$  junction temperature. Typical applications are in switching power supplies, converters, free-wheeling diodes, and reverse battery protection.

- $175^\circ\text{C}$   $T_J$  operation
- Center tap configuration
- Low forward voltage drop
- High purity, high temperature epoxy encapsulation for enhanced mechanical strength and moisture resistance
- High frequency operation
- Guard ring for enhanced ruggedness and long term reliability

### Case Styles

20CTQ150	20CTQ150S	20CTQ150-1
 <p>Base Common Cathode 2</p>  <p>1 2 3 Anode Common Cathode Anode</p> <p>TO-220AB</p>	 <p>Base Common Cathode 2</p>  <p>1 2 3 Anode Common Cathode Anode</p> <p>D<sup>2</sup>PAK</p>	 <p>Base Common Cathode 2</p>  <p>1 2 3 Anode Common Cathode Anode</p> <p>TO-262</p>

Voltage Ratings

Parameters	20CTQ150 20CTQ150S 20CTQ150-1
V <sub>R</sub> Max. DC Reverse Voltage (V)	150
V <sub>RWM</sub> Max. Working Peak Reverse Voltage (V)	

Absolute Maximum Ratings

Parameters	Values	Units	Conditions
I <sub>F(AV)</sub> Max. Average Forward (Per Leg) Current * See Fig. 5 (Per Device)	10 20	A	50% duty cycle @ T <sub>C</sub> = 154 °C, rectangular wave form
I <sub>FSM</sub> Max. Peak One Cycle Non-Repetitive Surge Current (Per Leg) * See Fig. 7	1030 180	A	5µs Sine or 3µs Rect. pulse 10ms Sine or 6ms Rect. pulse
E <sub>AS</sub> Non-Repetitive Avalanche Energy (Per Leg)	2.45	mJ	T <sub>J</sub> = 25 °C, I <sub>AS</sub> = 0.7 Amps, L = 10 mH
I <sub>AR</sub> Repetitive Avalanche Current (Per Leg)	0.7	A	Current decaying linearly to zero in 1 µsec Frequency limited by T <sub>J</sub> max. V <sub>A</sub> = 1.5 x V <sub>R</sub> typical

Electrical Specifications

Parameters	Typ.	Max.	Units	Conditions
V <sub>FM</sub> Max. Forward Voltage Drop (1) (Per Leg) * See Fig. 1	0.80	0.88	V	@ 10A
	0.90	1.0	V	@ 20A
	0.63	0.66	V	@ 10A
	0.73	0.77	V	@ 20A
I <sub>RM</sub> Max. Reverse Leakage Current (Per Leg) * See Fig. 2	3.0	25	µA	T <sub>J</sub> = 25 °C
	2.7	5.0	mA	T <sub>J</sub> = 125 °C
C <sub>T</sub> Typical Junction Capacitance (Per Leg)	-	280	pF	V <sub>R</sub> = 5V <sub>DC</sub> (test signal range 100kHz to 1Mhz) @ 25 °C
L <sub>S</sub> Typical Series Inductance (Per Leg)	-	8.0	nH	Measured lead to lead 5mm from package body
dv/dt Max. Voltage Rate of Change	-	10000	V/ µs	(Rated V <sub>R</sub> )

(1) Pulse Width < 300µs, Duty Cycle < 2%

Thermal-Mechanical Specifications

Parameters	Values	Units	Conditions
T <sub>J</sub> Max. Junction Temperature Range	-55 to 175	°C	
T <sub>stg</sub> Max. Storage Temperature Range	-55 to 175	°C	
R <sub>thJC</sub> Max. Thermal Resistance Junction to Case (Per Leg)	2.0	°C/W	DC operation
R <sub>thJC</sub> Max. Thermal Resistance Junction to Case (Per Package)	1.0	°C/W	DC operation
R <sub>thCS</sub> Typical Thermal Resistance, Case to Heatsink	0.50	°C/W	Mounting surface, smooth and greased (only for TO-220)
wt Approximate Weight	2 (0.07)	g (oz.)	
T Mounting Torque	Min.	6 (5)	Kg-cm (lbf-in)
	Max.	12 (10)	
Marking Device	20CTQ150	Case style TO-220	
	20CTQ150S	Case style D <sup>2</sup> -Pak	
	20CTQ150-1	Case style TO-262	

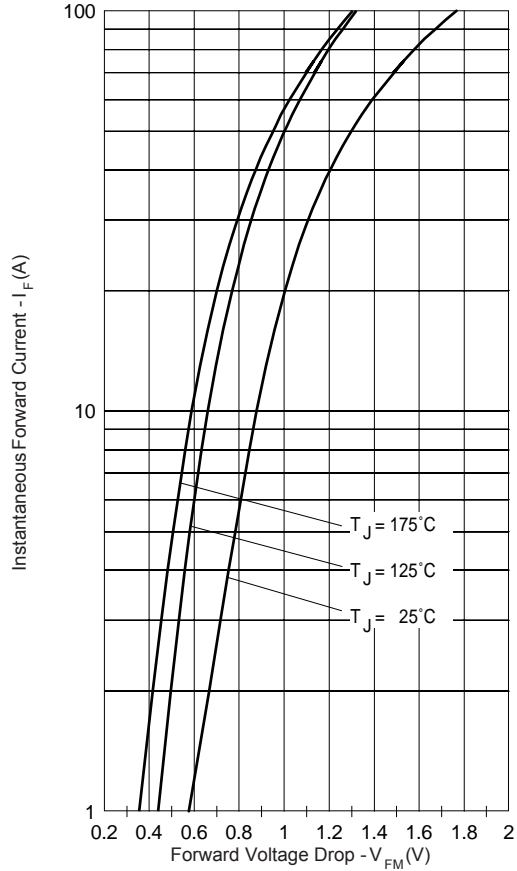


Fig. 1 - Max. Forward Voltage Drop Characteristics (Per Leg)

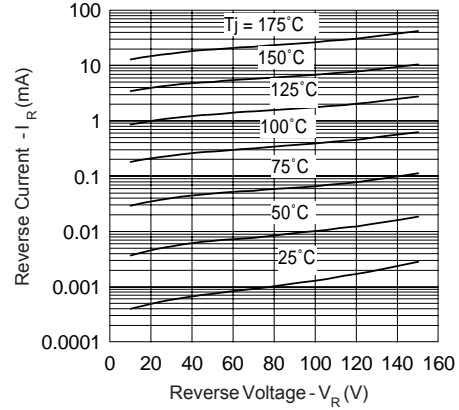


Fig. 2 - Typical Values Of Reverse Current Vs. Reverse Voltage (Per Leg)

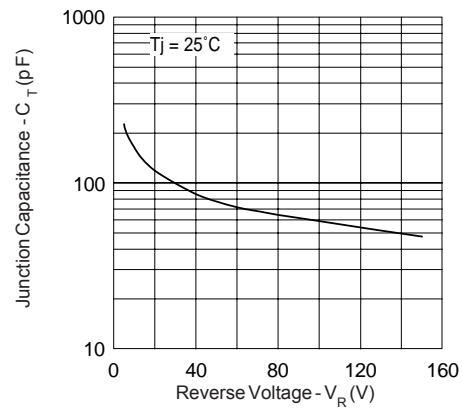


Fig. 3 - Typical Junction Capacitance Vs. Reverse Voltage (Per Leg)

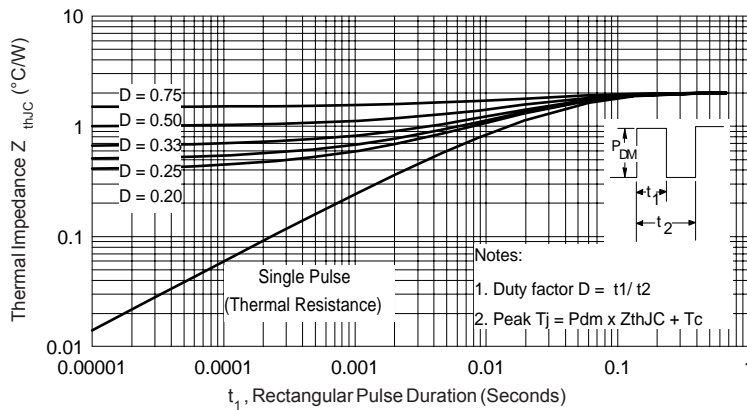


Fig. 4 - Max. Thermal Impedance  $Z_{thJC}$  Characteristics (Per Leg)

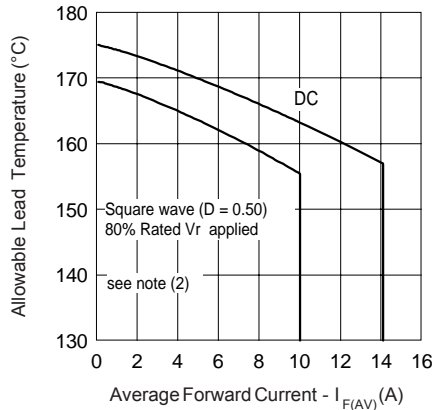


Fig. 5 - Maximum Average Forward Current Vs. Allowable Lead Temperature

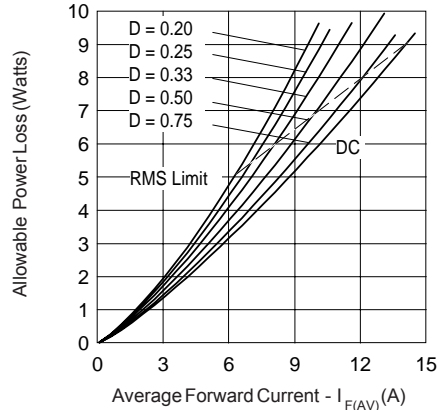


Fig. 6 - Maximum Average Forward Dissipation Vs. Average Forward Current

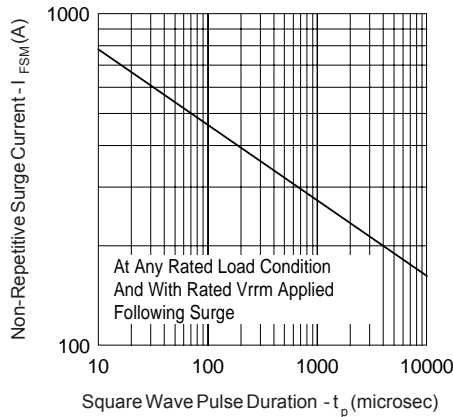


Fig. 7 - Maximum Peak Surge Forward Current Vs. Pulse Duration

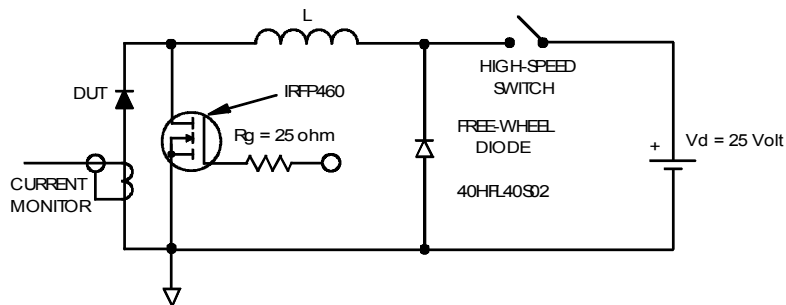




Fig. 8 - Unclamped Inductive Test Circuit

(2) Formula used:  $T_C = T_J - (P_d + P_{d_{REV}}) \times R_{thJC}$


$P_d$  = Forward Power Loss =  $I_{F(AV)} \times V_{FM} @ (I_{F(AV)}/D)$  (see Fig. 6);

$P_{d_{REV}}$  = Inverse Power Loss =  $V_{R1} \times I_R (1-D)$ ;  $I_R @ V_{R1} = 80\%$  rated  $V_R$


Outline Table

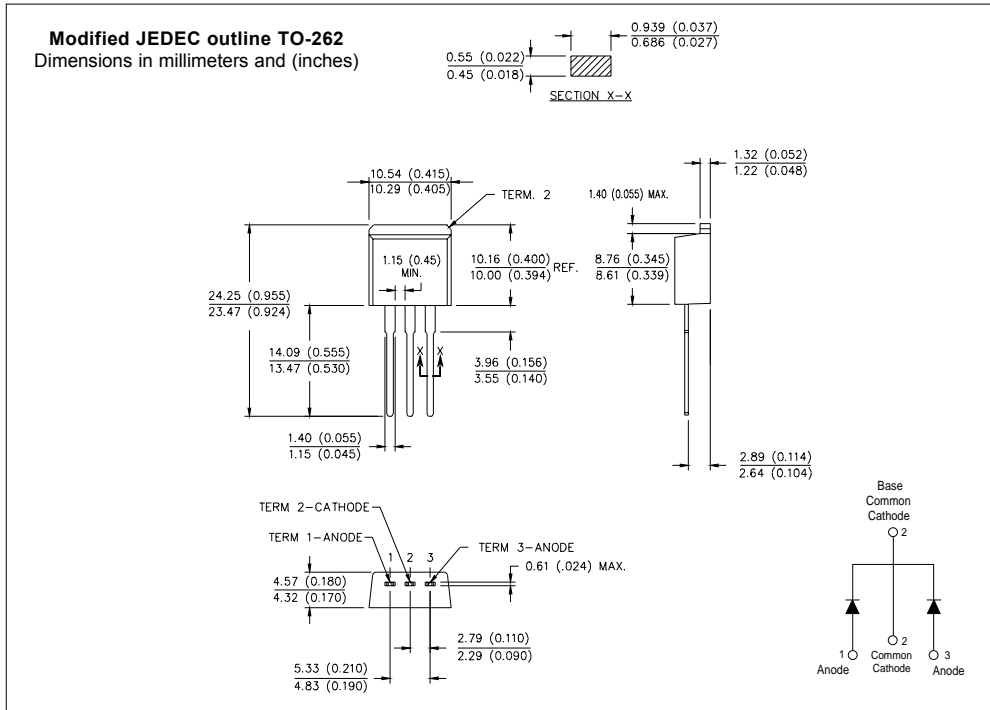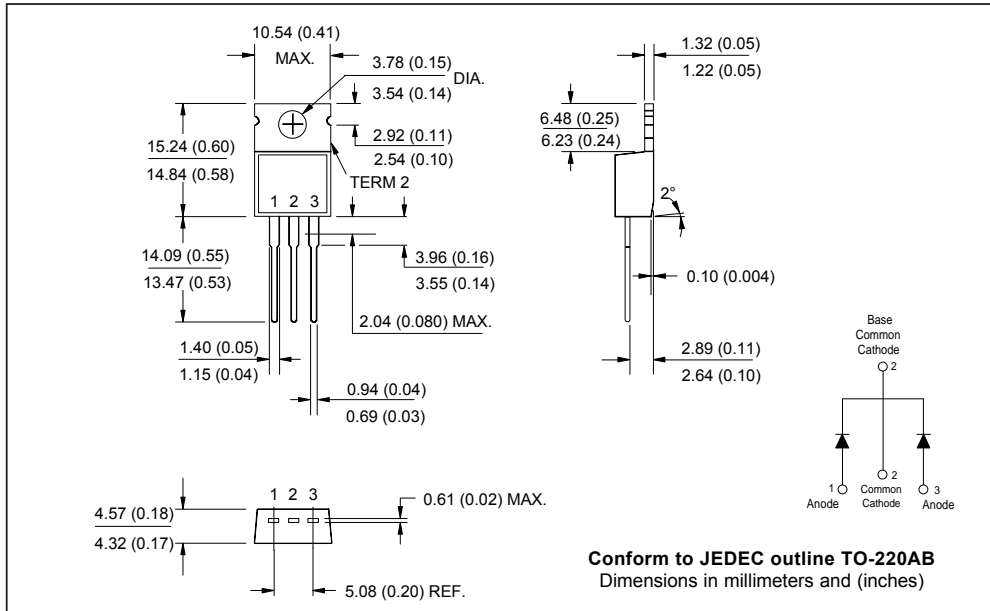

Outline Table

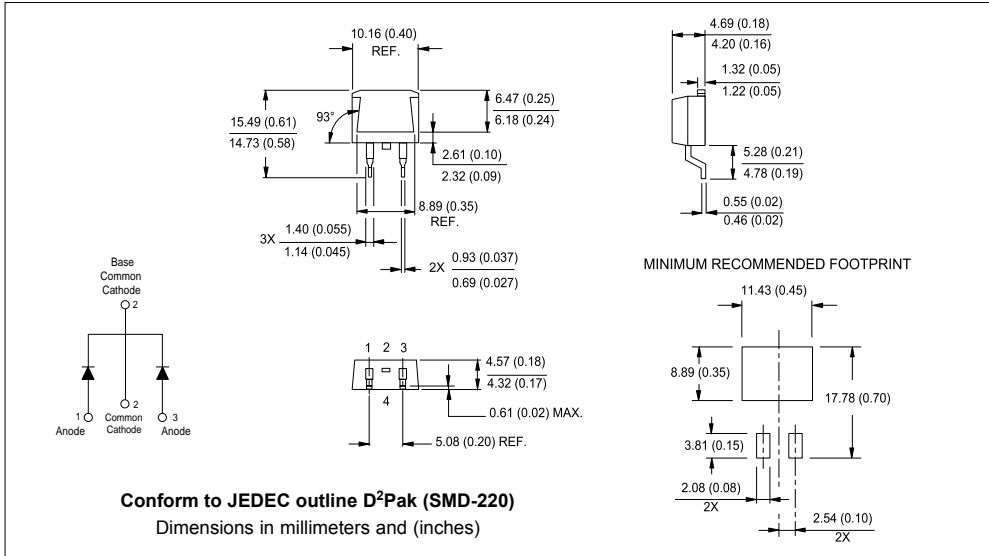

Tape & Reel Information

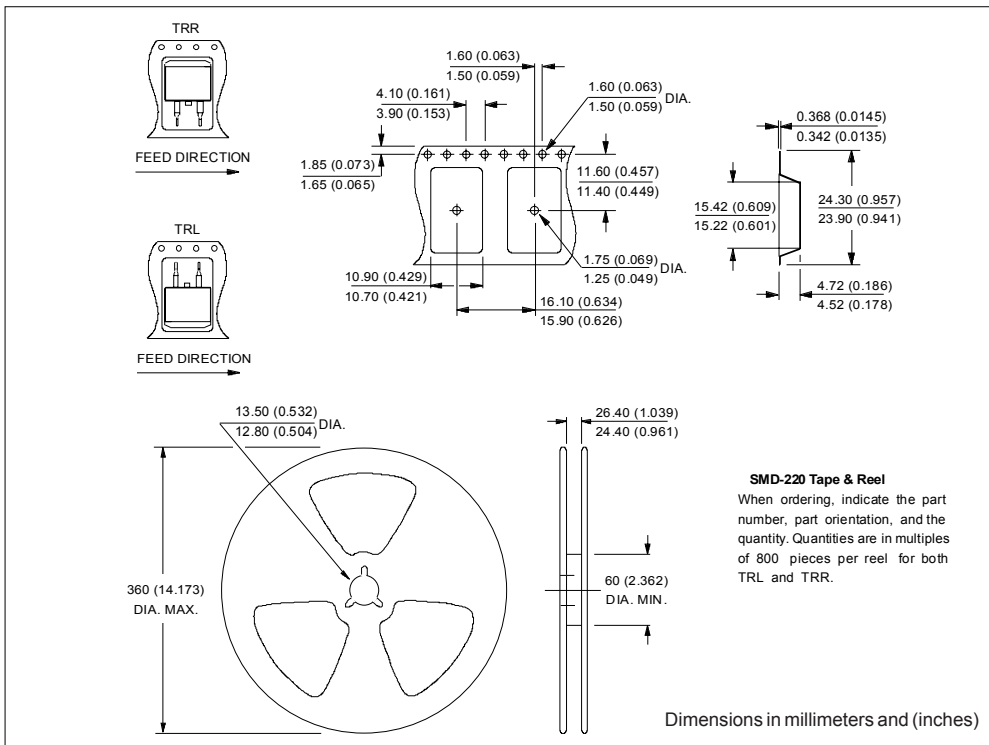

Part Marking Information

<p>EXAMPLE: THIS IS A 20CTQ150          LOT CODE 1789          ASSEMBLED ON WW 19, 2000          IN THE ASSEMBLY LINE "C"</p>	<p>INTERNATIONAL RECTIFIER LOGO</p> <p>20CTQ150</p> <p><b>IR</b> 019C</p> <p>17 89</p> <p>PART NUMBER</p> <p>DATE CODE YEAR 0 = 2000 WEEK 19 LINE C</p> <p>ASSEMBLY LOT CODE</p>
<p>TO-220</p>	
<p>EXAMPLE: THIS IS A 20CTQ150S          LOT CODE 8024          ASSEMBLED ON WW 02, 2000          IN THE ASSEMBLY LINE "L"</p>	<p>INTERNATIONAL RECTIFIER LOGO</p> <p>20CTQ150S</p> <p><b>IR</b> 002L</p> <p>80 24</p> <p>PART NUMBER</p> <p>DATE CODE YEAR 0 = 2000 WEEK 02 LINE L</p> <p>ASSEMBLY LOT CODE</p>
<p>D<sup>2</sup>PAK</p>	
<p>EXAMPLE: THIS IS A 20CTQ150-1          LOT CODE 1789          ASSEMBLED ON WW 19, 1999          IN THE ASSEMBLY LINE "C"</p>	<p>INTERNATIONAL RECTIFIER LOGO</p> <p>20CTQ150-1</p> <p><b>IR</b> 919C</p> <p>17 89</p> <p>PART NUMBER</p> <p>DATE CODE YEAR 9 = 1999 WEEK 19 LINE C</p> <p>ASSEMBLY LOT CODE</p>
<p>TO-262</p>	

Ordering Information Table

Device Code																	
	<table border="1" style="margin: auto;"> <tr> <td style="padding: 5px;">20</td> <td style="padding: 5px;">C</td> <td style="padding: 5px;">T</td> <td style="padding: 5px;">Q</td> <td style="padding: 5px;">150</td> <td style="padding: 5px;">S</td> <td style="padding: 5px;">TRL</td> <td style="padding: 5px;">-</td> </tr> <tr> <td style="text-align: center;">①</td> <td style="text-align: center;">②</td> <td style="text-align: center;">③</td> <td style="text-align: center;">④</td> <td style="text-align: center;">⑤</td> <td style="text-align: center;">⑥</td> <td style="text-align: center;">⑦</td> <td style="text-align: center;">⑧</td> </tr> </table>	20	C	T	Q	150	S	TRL	-	①	②	③	④	⑤	⑥	⑦	⑧
20	C	T	Q	150	S	TRL	-										
①	②	③	④	⑤	⑥	⑦	⑧										
<b>1</b>	- Current Rating (20 = 20A)																
<b>2</b>	- C = Common Cathode																
<b>3</b>	- T = TO-220																
<b>4</b>	- Q = Schottky Q Series																
<b>5</b>	- Voltage Rating (150 = 150V)																
<b>6</b>	- <ul style="list-style-type: none"> <li>• none = TO-220AB</li> <li>• -1 = TO-262</li> <li>• S = D<sup>2</sup>Pak</li> </ul>																
<b>7</b>	- <ul style="list-style-type: none"> <li>• none = Tube (50 pieces)</li> <li>• TRL = Tape &amp; Reel (Left Oriented - for D<sup>2</sup>Pak only)</li> <li>• TRR = Tape &amp; Reel (Right Oriented - for D<sup>2</sup>Pak only)</li> </ul>																
<b>8</b>	- <ul style="list-style-type: none"> <li>• none = Standard Production</li> <li>• PbF = Lead-Free</li> </ul>																

Data and specifications subject to change without notice.  
This product has been designed for Industrial Level.  
Qualification Standards can be found on IR's Web site.