


BAW M12MG2-ICC20B-BP03
Inductive Distance Sensors

0,5...2 mm
4...20 mA

BALLUFF
sensors worldwide

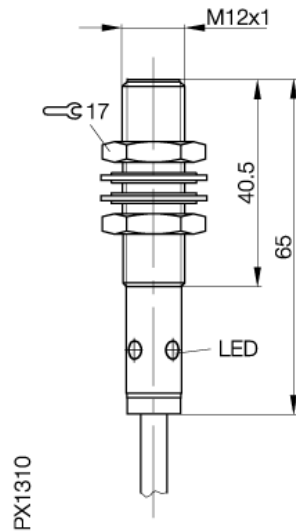

Electrical data:

Connection	cable
Rated operational voltage DC	24 V
Rated insulation voltage (Ui)	250 AC
Electrical type	DC
Supply voltage ripple	15 %
Switching element function	4...20 mA
Supply voltage max. (Ub)	30 V
Supply voltage min. (Ub)	10 V
Output current at se	12 mA
Output current at sl max	20,0 mA
Output current at sl min	4,0 mA
Cutoff frequency (-3dB output amplitude)	500 Hz
Load resistance max (RI)	500 Ohm
Temperature compensation	no
Linear range max (sl)	2 mm
Linear range min (sl)	0,5 mm
Non-linearity	±40 µm
Output signal	4...20 mA


General data:

Supply voltage indicator	no
Degree of protection IP	IP 67
Insulation class	2
Polarity reversal resistant	yes
Protected against reversal	yes

Mechanical data:

Midpoint of linear range (se)	1,25 mm
Cable code designation	LifY-Y-11Y-0
Mounting	flush mountable
Surface treatment	nickel plated
Ambient temperature max (Ta)	70 °C
Ambient temperature min (Ta)	-10 °C
Sensing face material	PA 12
Housing material	CuZn
Cable sheath material	PUR
Repeatability	3 %
Cable diameter D	5,1 mm
Working area max (sa)	2 mm
Working area min (sa)	0,5 mm
Time delay before available max	0,5 ms
Measurement velocity	40 m/s
Opt. working temperature max.	50 °C
Opt. working temperature min.	10 °C
Temperature coefficient max.	4,5 µm/K
Temperature coefficient min.	-3,5 µm/K
Temperature coefficient typ.	-0,5 µm/K
Repeat accuracy	±6,0 µm
Adjustment indicator	yes
Working range	0,5...2 mm

Wiring:



www.balluff.com

Balluff Europe: +49 7158 173 -0
Balluff USA: 1-800-54 3-83 90
Balluff Asia: +86 21-50 64 41 31

Online Productinformation
2008-09-11