

TC40175BP/TC40175BF QUAD D-TYPE FLIP-FLOP



TC40175BP/TC40175BF contains four circuits of D type flip-flop having common clock terminal and clear terminal. The logical input applied to D_n input is transferred to Q_n output by the rising edge of CLOCK input.

$\overline{\text{RESET}}$ input is active with "L" level. This has the same functions as TTL 54175/74175 and the pin assignment is also same.


MAXIMUM RATINGS

| CHARACTERISTIC | SYMBOL | RATING | UNIT |
|-----------------------------|------------------|---|------|
| DC Supply Voltage | V _{DD} | V _{SS} -0.5 ~ V _{SS} +20 | V |
| Input Voltage | V _{IN} | V _{SS} -0.5 ~ V _{DD} +0.5 | V |
| Output Voltage | V _{OUT} | V _{SS} -0.5 ~ V _{DD} +0.5 | V |
| DC Input Current | I _{IN} | ±10 | mA |
| Power Dissipation | P _D | 300(DIP)/180(MFP) | mW |
| Operating Temperature Range | T _A | -40 ~ 85 | °C |
| Storage Temperature Range | T _{stg} | -65 ~ 150 | °C |
| Lead Temp./Time | T _{sol} | 260°C · 10sec | |

LOGIC DIAGRAM

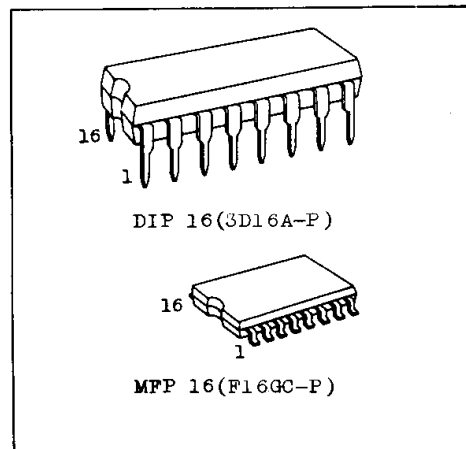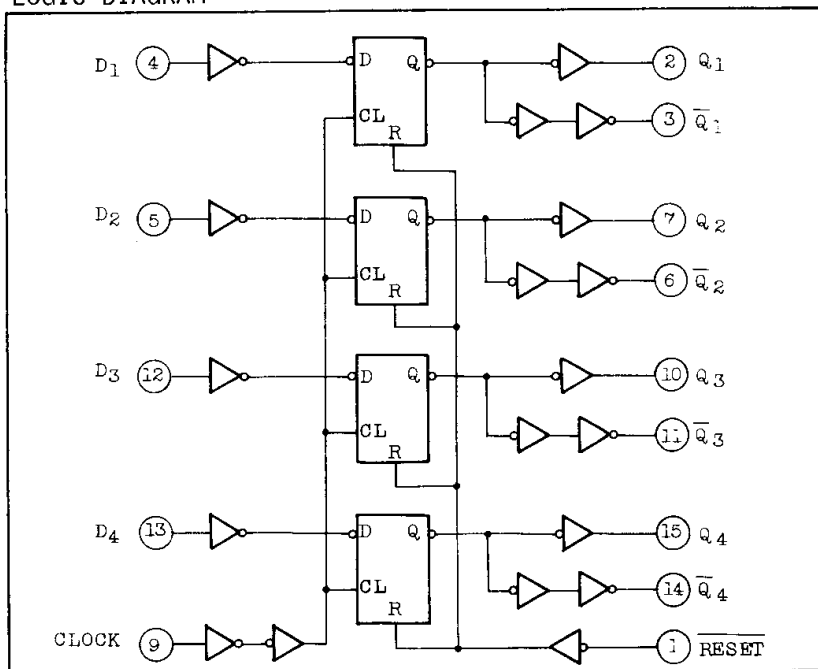

PIN ASSIGNMENT

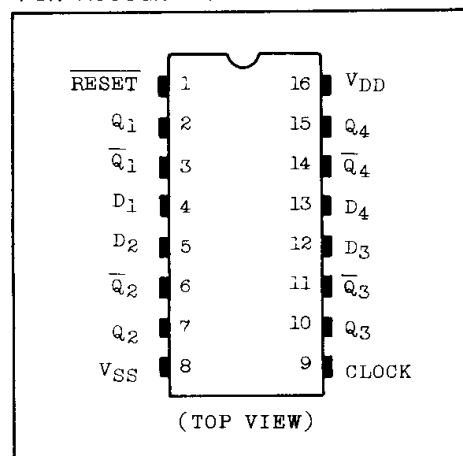

TRUTH TABLE

| INPUTS | | | OUTPUTS | |
|----------------|----------------|---------------------------|------------------|-----------------------------|
| CLOCK Δ | D _n | $\overline{\text{RESET}}$ | Q _{n+1} | $\overline{\text{Q}}_{n+1}$ |
| \uparrow | H | H | H | L |
| \uparrow | L | H | L | H |
| \downarrow | * | H | Q _n | $\overline{\text{Q}}_{n}$ |
| * | * | L | L | H |

Δ : Level change

· : No change

* : Don't care

TC40175BP/BF

RECOMMENDED OPERATING CONDITIONS (V_{SS}=0V)

| CHARACTERISTIC | SYMBOL | MIN. | TYP. | MAX. | UNIT |
|-------------------|-----------------|------|------|-----------------|------|
| DC Supply Voltage | V _{DD} | 3 | - | 18 | V |
| Input Voltage | V _{IN} | 0 | - | V _{DD} | V |

STATIC ELECTRICAL CHARACTERISTICS (V_{SS}=0V)

| CHARACTERISTIC | SYM-BOL | TEST CONDITION | V _{DD} (V) | -40°C | | 25°C | | | 85°C | | UNIT | |
|---------------------------|-----------------|---|------------------------|-------|------|-------|-------|-------------------|-------|------|------|----|
| | | | | MIN. | MAX. | MIN. | TYP. | MAX. | MIN. | MAX. | | |
| High-Level Output Voltage | V _{OH} | I _{OUT} < 1μA V _{IN} =V _{SS} , V _{DD} | 5 | 4.95 | - | 4.95 | 5.00 | - | 4.95 | - | V | |
| | | | 10 | 9.95 | - | 9.95 | 10.00 | - | 9.95 | - | | |
| | | | 15 | 14.95 | - | 14.95 | 15.00 | - | 14.95 | - | | |
| Low-Level Output Voltage | V _{OL} | I _{OUT} < 1μA V _{IN} =V _{SS} , V _{DD} | 5 | - | 0.05 | - | 0.00 | 0.05 | - | 0.05 | V | |
| | | | 10 | - | 0.05 | - | 0.00 | 0.05 | - | 0.05 | | |
| | | | 15 | - | 0.05 | - | 0.00 | 0.05 | - | 0.05 | | |
| Output High Current | I _{OH} | V _{OH} =4.6V V _{OH} =2.5V V _{OH} =9.5V V _{OH} =13.5V V _{IN} =V _{SS} , V _{DD} | 5 | -0.61 | - | -0.51 | -1.0 | - | -0.42 | - | mA | |
| | | | 5 | -2.5 | - | -2.1 | -4.0 | - | -1.7 | - | | |
| | | | 10 | -1.5 | - | -1.3 | -2.2 | - | -1.1 | - | | |
| | | | 15 | -4.0 | - | -3.4 | -9.0 | - | -2.8 | - | | |
| | | | 15 | -4.0 | - | -3.4 | -9.0 | - | -2.8 | - | | |
| Output Low Current | I _{OL} | V _{OL} =0.4V V _{OL} =0.5V V _{OL} =1.5V V _{IN} =V _{SS} , V _{DD} | 5 | 0.61 | - | 0.51 | 1.5 | - | 0.42 | - | mA | |
| | | | 10 | 1.5 | - | 1.3 | 3.8 | - | 1.1 | - | | |
| | | | 15 | 4.0 | - | 3.4 | 15.0 | - | 2.8 | - | | |
| | | | 15 | 4.0 | - | 3.4 | 15.0 | - | 2.8 | - | | |
| | | | 15 | 4.0 | - | 3.4 | 15.0 | - | 2.8 | - | | |
| Input High Voltage | V _{IH} | V _{OUT} =0.5V, 4.5V V _{OUT} =1.0V, 9.0V V _{OUT} =1.5V, 13.5V I _{OUT} < 1μA | 5 | 3.5 | - | 3.5 | 2.75 | - | 3.5 | - | V | |
| | | | 10 | 7.0 | - | 7.0 | 5.5 | - | 7.0 | - | | |
| | | | 15 | 11.0 | - | 11.0 | 8.25 | - | 11.0 | - | | |
| | | | 15 | 11.0 | - | 11.0 | 8.25 | - | 11.0 | - | | |
| Input Low Voltage | V _{IL} | V _{OUT} =0.5V, 4.5V V _{OUT} =1.0V, 9.0V V _{OUT} =1.5V, 13.5V I _{OUT} < 1μA | 5 | - | 1.5 | - | 2.25 | 1.5 | - | 1.5 | V | |
| | | | 10 | - | 3.0 | - | 4.5 | 3.0 | - | 3.0 | | |
| | | | 15 | - | 4.0 | - | 6.75 | 4.0 | - | 4.0 | | |
| | | | 15 | - | 4.0 | - | 6.75 | 4.0 | - | 4.0 | | |
| Input Current | "H" Level | I _{IH} | V _{IH} =18V | 18 | - | 0.1 | - | 10 ⁻⁵ | 0.1 | - | 1.0 | μA |
| | "L" Level | I _{IL} | V _{IL} =0V | 18 | - | -0.1 | - | -10 ⁻⁵ | -0.1 | - | -1.0 | |

STATIC ELECTRICAL CHARACTERISTICS (V_{SS}=0V)

| CHARACTERISTIC | SYM-BOL | TEST CONDITION | V _{DD} (V) | -40°C | | 25°C | | | 85°C | | UNIT |
|--------------------------|-----------------|---|------------------------|-------|------|------|-------|------|------|------|------|
| | | | | MIN. | MAX. | MIN. | TYP. | MAX. | MIN. | MAX. | |
| Quiescent Device Current | I _{DD} | V _{IN} =V _{SS} , V _{DD} * | 5 | - | 1 | - | 0.005 | 1 | - | 30 | A |
| | | | 10 | - | 2 | - | 0.010 | 2 | - | 60 | |
| | | | 15 | - | 4 | - | 0.015 | 4 | - | 120 | |

* All valid input combinations.

DYNAMIC ELECTRICAL CHARACTERISTICS (T_a=25°C, V_{SS}=0V, C_L=50pF)

| CHARACTERISTIC | SYMBOL | TEST CONDITION | V _{DD} (V) | MIN. | TYP. | MAX. | UNIT |
|--|--------------------------------------|----------------|---------------------|------|------|------|------|
| | | | | | | | |
| Output Transition Time (Low to High) | t _{TLH} | | 5 | - | 80 | 200 | ns |
| | | | 10 | - | 50 | 100 | |
| | | | 15 | - | 40 | 80 | |
| Output Transition Time (High to Low) | t _{THL} | | 5 | - | 80 | 200 | ns |
| | | | 10 | - | 50 | 100 | |
| | | | 15 | - | 40 | 80 | |
| Propagation Delay Time (CLOCK - Q, \bar{Q}) | t _{pLH} t _{pHL} | | 5 | - | 170 | 340 | ns |
| | | | 10 | - | 70 | 140 | |
| | | | 15 | - | 50 | 100 | |
| Propagation Delay Time ($\overline{\text{RESET}}$ - Q, \bar{Q}) | t _{pLH} t _{pHL} | | 5 | - | 190 | 380 | ns |
| | | | 10 | - | 80 | 160 | |
| | | | 15 | - | 55 | 110 | |
| Min. Clock Pulse Width | t _w | | 5 | - | 55 | 130 | ns |
| | | | 10 | - | 20 | 60 | |
| | | | 15 | - | 15 | 40 | |
| Min. Pulse Width ($\overline{\text{RESET}}$) | t _{wL} | | 5 | - | 40 | 100 | ns |
| | | | 10 | - | 20 | 50 | |
| | | | 15 | - | 15 | 40 | |
| Max. Clock Frequency | f _{CL} | | 5 | 3.5 | 9 | - | MHz |
| | | | 10 | 6 | 25 | - | |
| | | | 15 | 8 | 34 | - | |
| Max. Clock Input Rise Time. Max. Clock Input Fall Time. | t _{rCL} t _{fCL} | | 5 | 20 | - | - | μs |
| | | | 10 | 15 | - | - | |
| | | | 15 | 15 | - | - | |

TC40175BP/BF

DYNAMIC ELECTRICAL CHARACTERISTICS (Ta=25°C, VSS=0V, CL=50pF)

| CHARACTERISTIC | SYMBOL | TEST CONDITION | VDD (V) | MIN. | TYP. | MAX. | UNIT |
|--------------------------------------|------------------|----------------|---------|------|------|------|------|
| | | | | | | | |
| Min. Set-up Time (DATA - CLOCK) | t _{SU} | | 5 | - | 30 | 60 | ns |
| | | | 10 | - | 15 | 30 | |
| | | | 15 | - | 10 | 20 | |
| Min. Hold Time (DATA - CLOCK) | t _H | | 5 | - | -5 | 80 | ns |
| | | | 10 | - | 0 | 40 | |
| | | | 15 | - | 3 | 30 | |
| Min. Removal Time (RESET - CLOCK) | t _{rem} | | 5 | - | 7 | 40 | ns |
| | | | 10 | - | 4 | 20 | |
| | | | 15 | - | 3 | 15 | |
| Input Capacitance | C _{IN} | | | - | 5 | 7.5 | pF |

WAVEFORM FOR MEASUREMENT OF DYNAMIC CHARACTERISTICS

