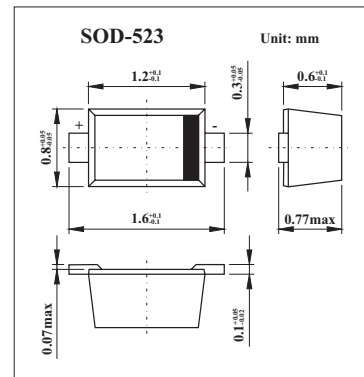


HIGH SPEED SWITCHING APPLICATION

1SS373

■ Features

- Small Package
- Low forward voltage : $V_F = 0.23V(TYP.)$ $I_F = 5mA$

■ Absolute Maximum Ratings $T_a = 25^\circ C$

Characteristic	Symbol	Rating	Unit
Maximum (Peak) reverse voltage	V_{RM}	15	V
Reverse voltage	V_R	10	V
Maximum (Peak) forward current	I_{FM}	200	mA
Average forward current	I_o	100	mA
Surge current (10 ms)	I_{FSM}	1	A
Power dissipation	P^*	150	mW
Junction temperature	T_j	125	$^\circ C$
Storage temperature range	T_{stg}	-55 to + 125	$^\circ C$
Operating temperature range	T_{opr}	-40 to + 100	$^\circ C$

* : Mounted on a glass epoxy circuit board of $20 \times 20mm$, pad dimension of $4 \times 4mm$.

■ Electrical Characteristics $T_a = 25^\circ C$

Characteristic	Symbol	Conditions	Min	Typ	Max	Unit
Continuous forward voltage	V_F	$I_F = 1 mA$		0.18		V
		$I_F = 5 mA$		0.23	0.3	
		$I_F = 100 mA$		0.35	0.5	
Reverse current	I_R	$V_R = 10 V$			20	μA
Total capacitance	C_d	$V_R = 0 V, f = 1 MHz;$		20	40	pF

■ Marking

Marking	S4
---------	----