


◆ PRODUCT SPECIFICATIONS


Part Number	Impedance (Ω) at 100 MHz	DCR (Ω) Max.	Rated Current (mA) Max.
SMB-201209-F2-110A	11 \pm 25%	0.20	600
SMB-201209-F2-260A	26 \pm 25%	0.20	400
SMB-201209-F2-310A	31 \pm 25%	0.30	400
SMB-201209-F2-500A	50 \pm 25%	0.35	400
SMB-201209-F2-600A	60 \pm 25%	0.40	400
SMB-201209-F2-800A	80 \pm 25%	0.40	400
SMB-201209-F2-101A	100 \pm 25%	0.40	400
SMB-201209-F2-121A	120 \pm 25%	0.40	300
SMB-201209-F2-151A	150 \pm 25%	0.40	300
SMB-201209-F2-221A	220 \pm 25%	0.40	300
SMB-201209-F2-301A	300 \pm 25%	0.40	300
SMB-201209-F2-501A	500 \pm 25%	0.40	200
SMB-201209-F2-601A	600 \pm 25%	0.45	200
SMB-201209-F2-801A	800 \pm 25%	0.60	150
SMB-201209-F2-102A	1000 \pm 25%	0.60	100
SMB-201209-F2-122A	1200 \pm 25%	0.70	100
SMB-201209-F2-152A	1500 \pm 25%	0.90	100
SMB-201209-F2-202A	2000 \pm 25%	1.00	50

◆ TYPICAL ELECTRICAL CHARACTERISTIC CURVES

SMB-201209-F2-110A

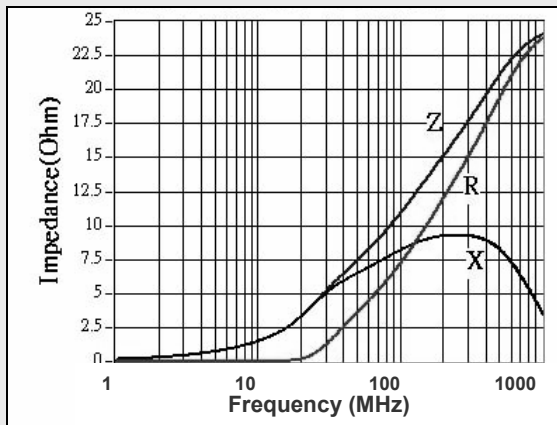


SMB-201209-F2-260A

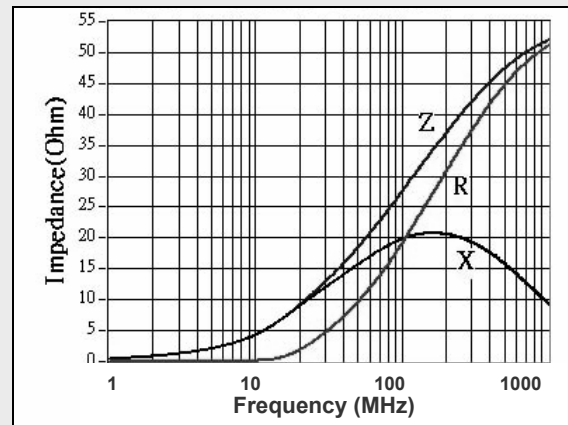


◆ TYPICAL ELECTRICAL CHARACTERISTIC CURVES


SMB-201209-F2-310A

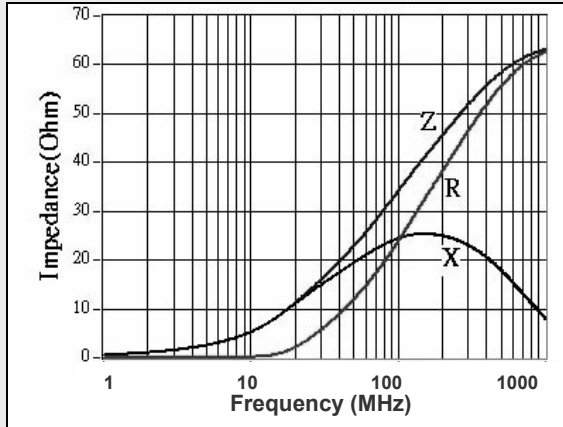


SMB-201209-F2-500A

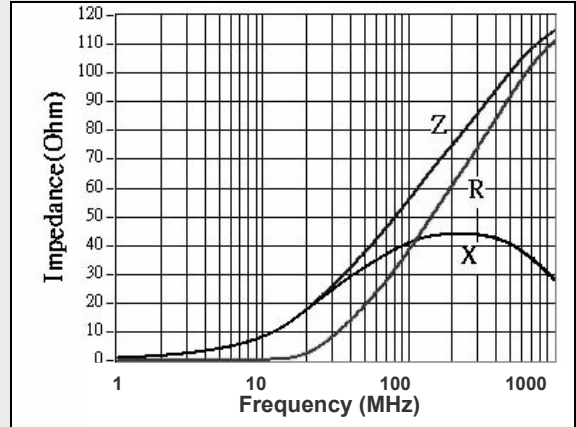


SMB-201209-F2-600A

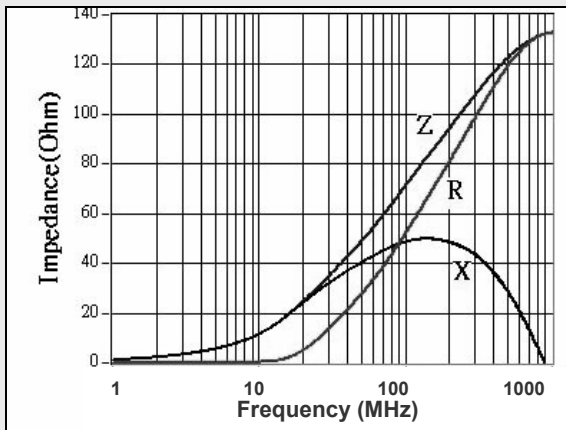


SMB-201209-F2-800A

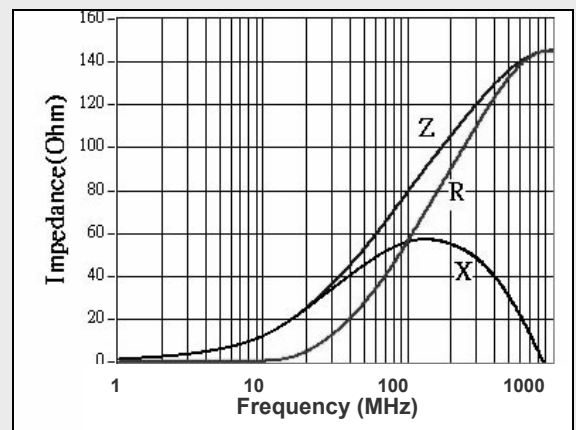

SMB-201209-F2-101A

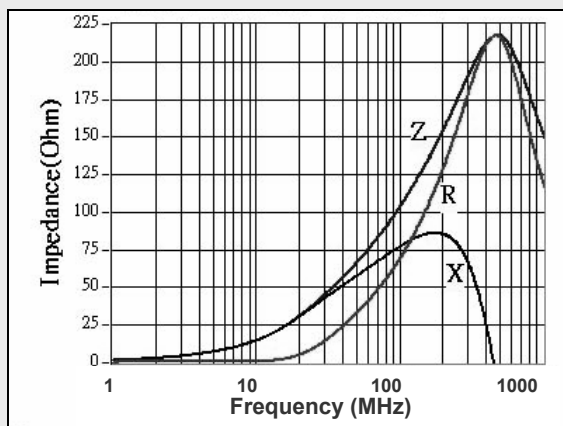


SMB-201209-F2-121A

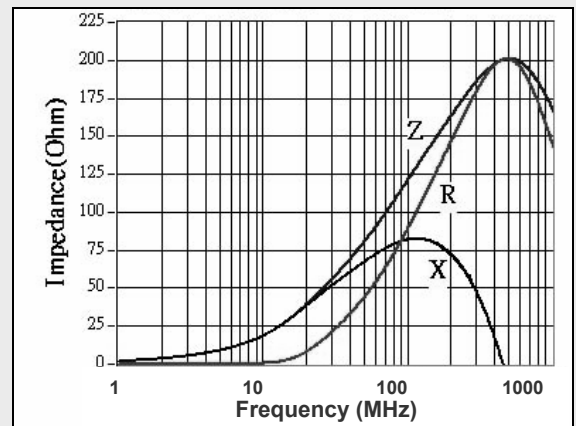


◆ TYPICAL ELECTRICAL CHARACTERISTIC CURVES


SMB-201209-F2-151A

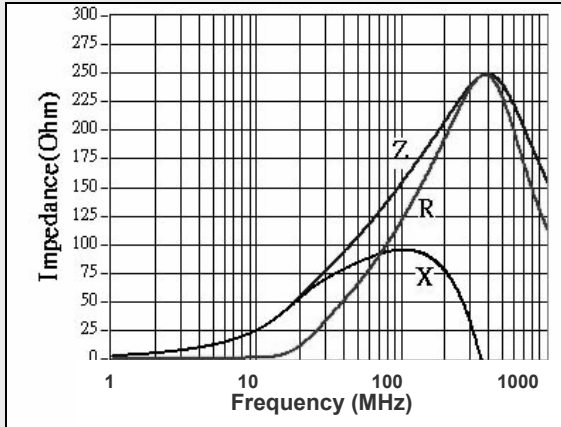


SMB-201209-F2-181A

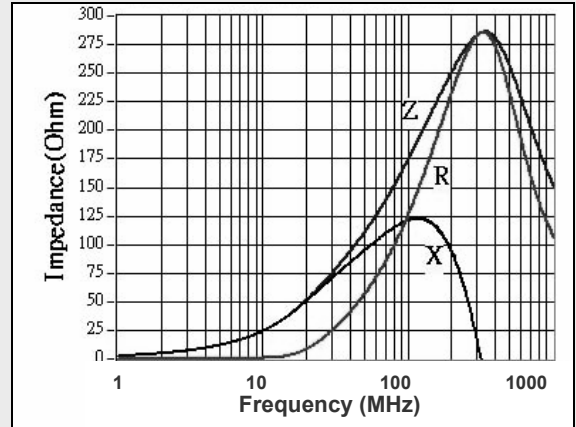


SMB-201209-F2-221A

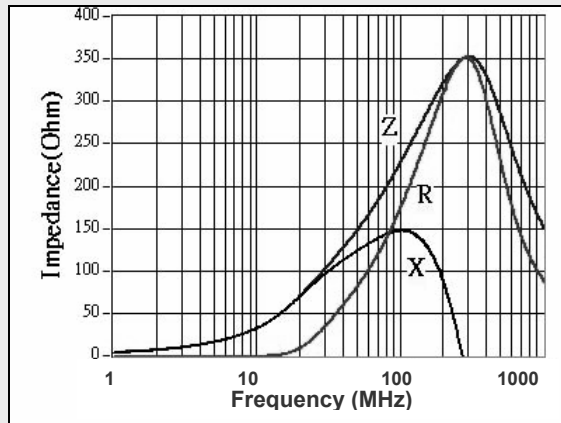


SMB-201209-F2-301A

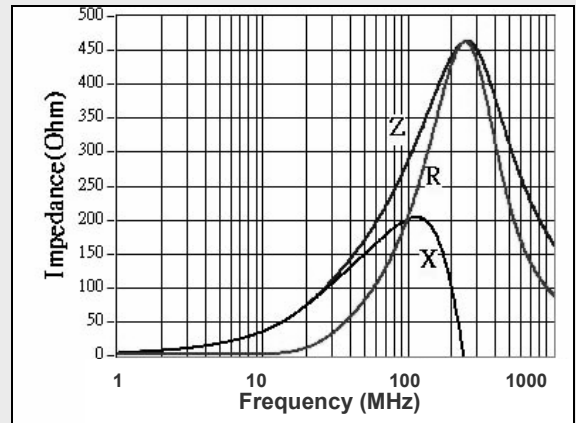

SMB-201209-F2-501A

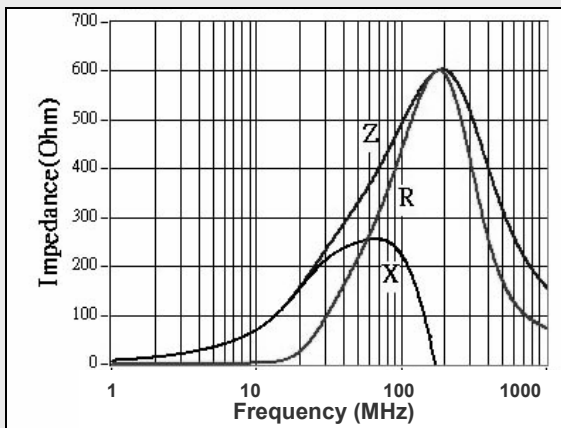


SMB-201209-F2-601A

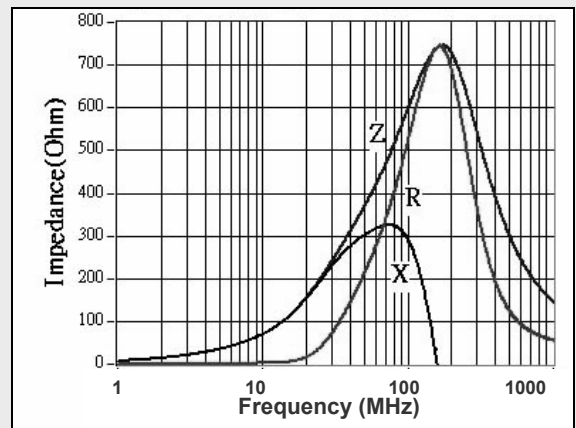


◆ TYPICAL ELECTRICAL CHARACTERISTIC CURVES


SMB-201209-F2-801A

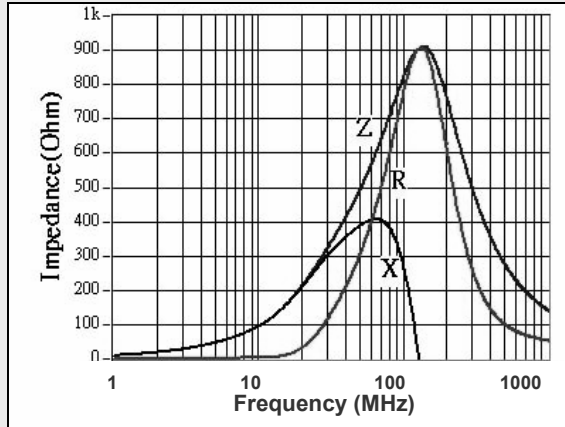


SMB-201209-F2-102A

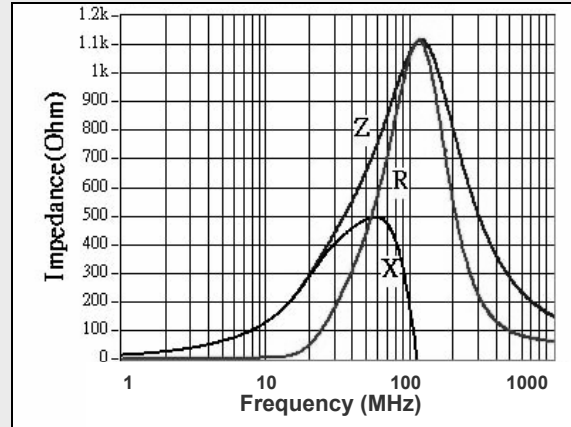

SMB-201209-F2-122A

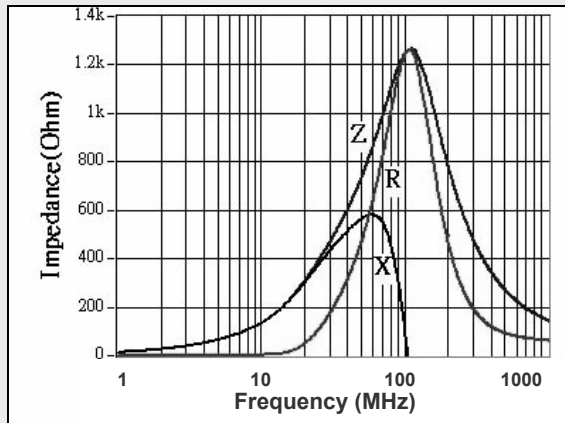

SMB-201209-F2-152A

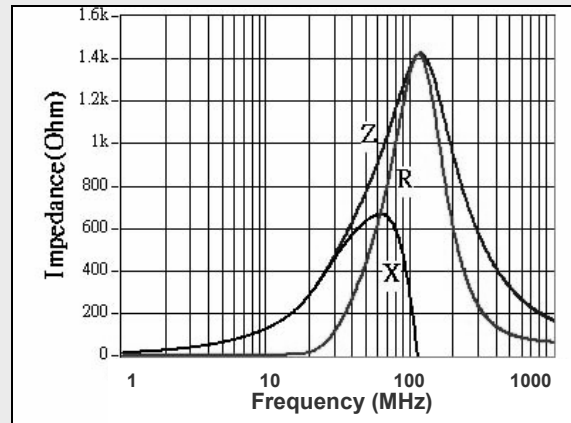

SMB-201209-F2-202A

