


◆ PRODUCT SPECIFICATIONS


Part Number	Impedance (Ω) at 100 MHz	DCR (Ω) Max.	Rate Current (mA) Max.
SMB-453215-F2-190A	19 \pm 25%	0.10	500
SMB-453215-F2-380A	38 \pm 25%	0.15	500
SMB-453215-F2-700A	70 \pm 25%	0.20	400
SMB-453215-F2-800A	80 \pm 25%	0.20	400
SMB-453215-F2-101A	100 \pm 25%	0.20	400
SMB-453215-F2-121A	120 \pm 25%	0.25	400
SMB-453215-F2-301A	300 \pm 25%	0.30	300

◆ TYPICAL ELECTRICAL CHARACTERISTIC CURVES

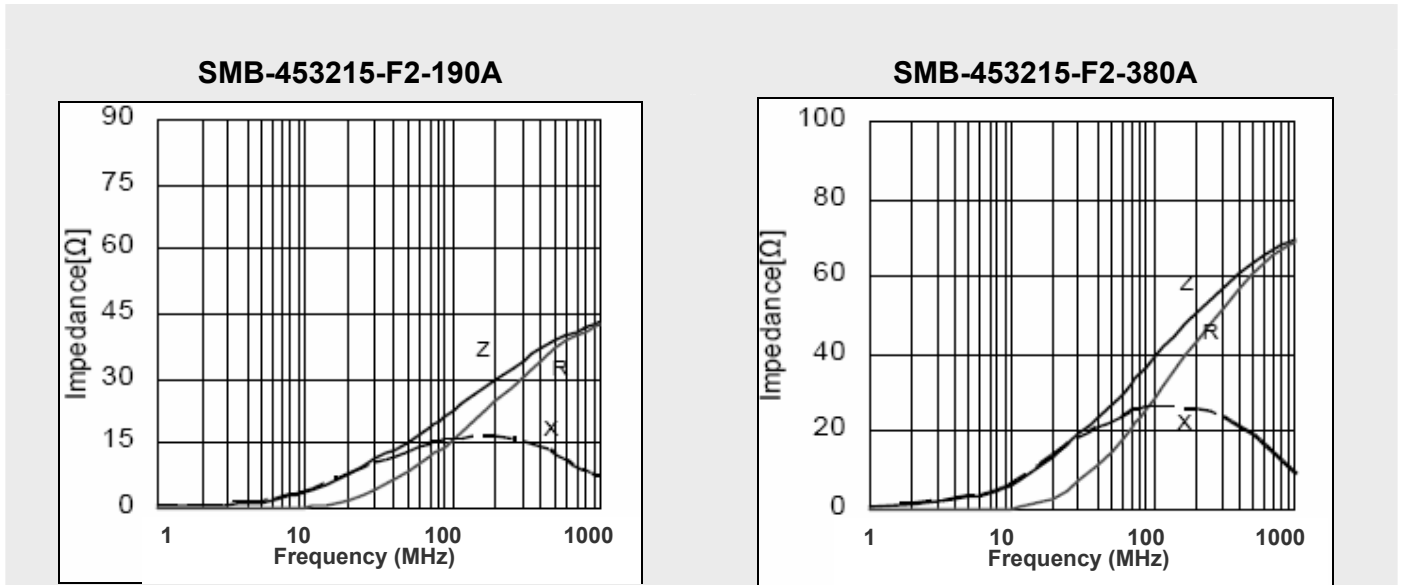


◆ TYPICAL ELECTRICAL CHARACTERISTIC CURVES


SMB-453215-F2-700A

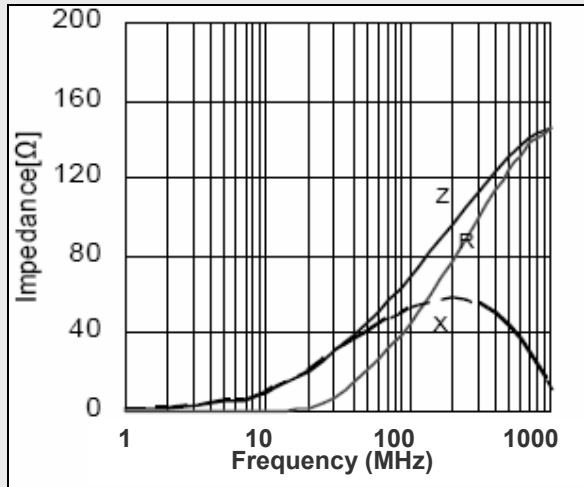


SMB-453215-F2-800A

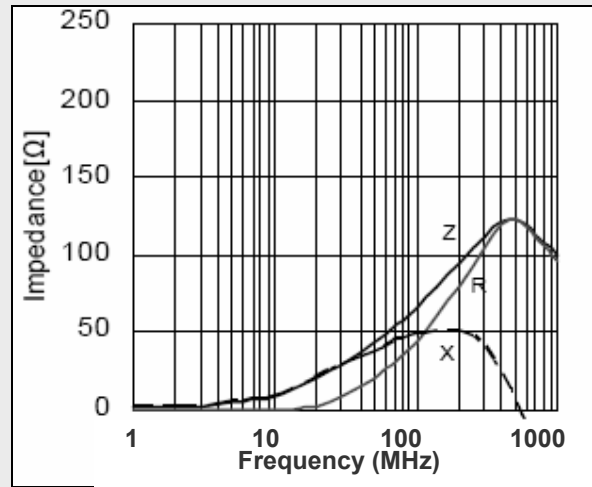

SMB-453215-F2-101A

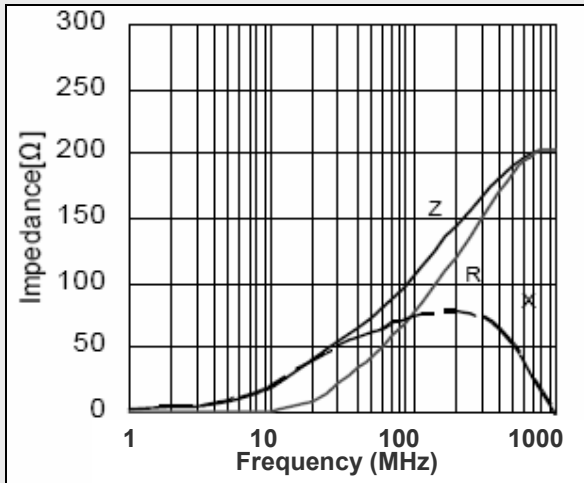

SMB-453215-F2-121A

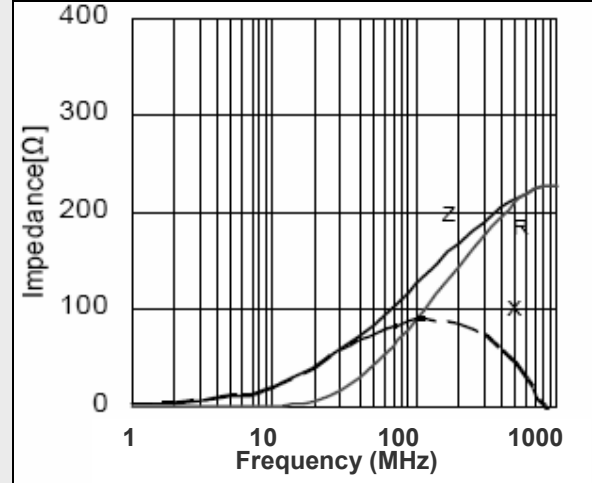

SMB-453215-F2-301A

