


◆ PRODUCT SPECIFICATIONS


Part Number	Impedance (Ω) at 100 MHz	DCR (Ω) Max.	Rated Current (mA) Max.
SMB-160808-F3-110B	11 \pm 25%	0.20	500
SMB-160808-F3-260B	26 \pm 25%	0.20	500
SMB-160808-F3-310B	31 \pm 25%	0.40	400
SMB-160808-F3-500B	50 \pm 25%	0.40	300
SMB-160808-F3-700B	70 \pm 25%	0.40	300
SMB-160808-F3-800B	80 \pm 25%	0.40	300
SMB-160808-F3-101B	100 \pm 25%	0.40	300
SMB-160808-F3-121B	120 \pm 25%	0.40	200
SMB-160808-F3-151B	150 \pm 25%	0.40	200
SMB-160808-F3-181B	180 \pm 25%	0.40	200
SMB-160808-F3-221B	220 \pm 25%	0.40	200
SMB-160808-F3-301B	300 \pm 25%	0.50	150
SMB-160808-F3-501B	500 \pm 25%	0.60	150
SMB-160808-F3-601B	600 \pm 25%	0.70	100
SMB-160808-F3-102B	1000 \pm 25%	0.90	100

◆ TYPICAL ELECTRICAL CHARACTERISTIC CURVES

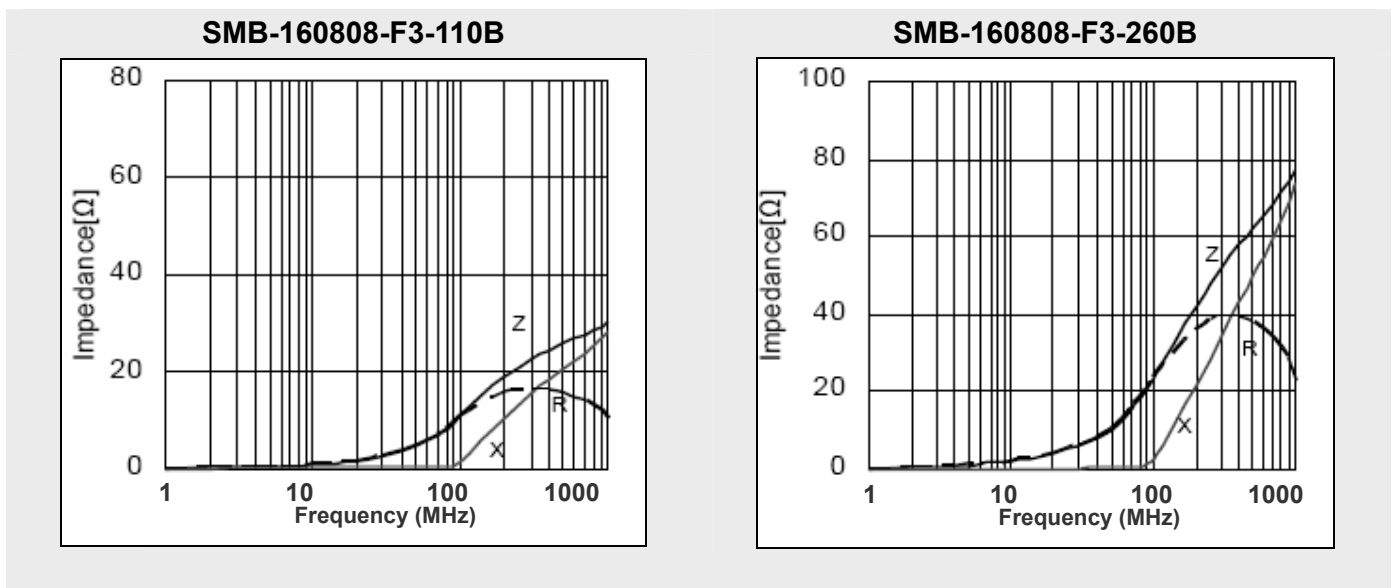


◆ TYPICAL ELECTRICAL CHARACTERISTIC CURVES


SMB-160808-F3-310B

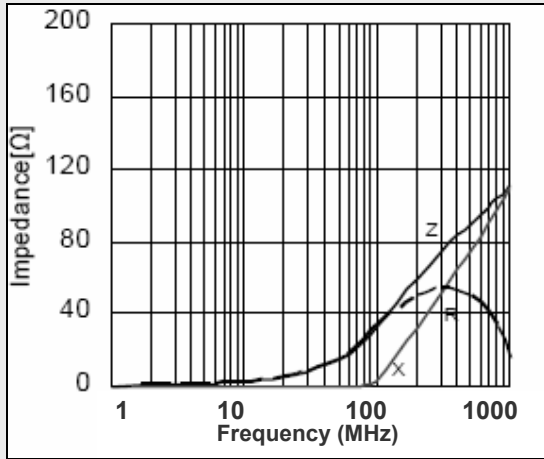


SMB-160808-F3-500B

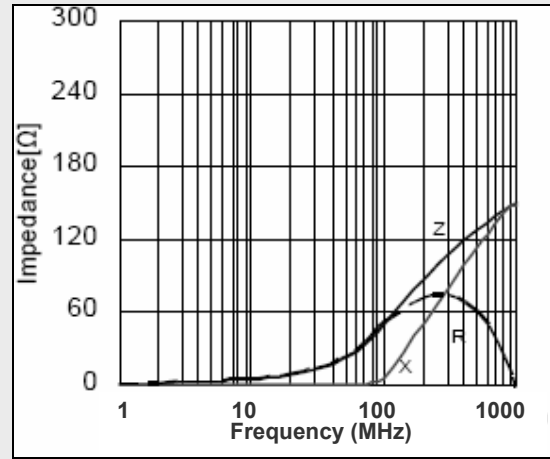


SMB-160808-F3-700B

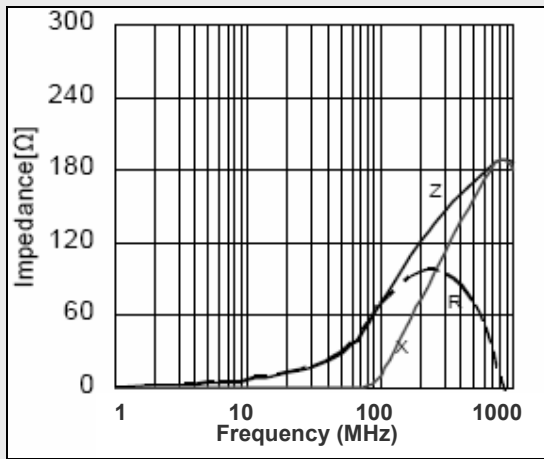


SMB-160808-F3-800B

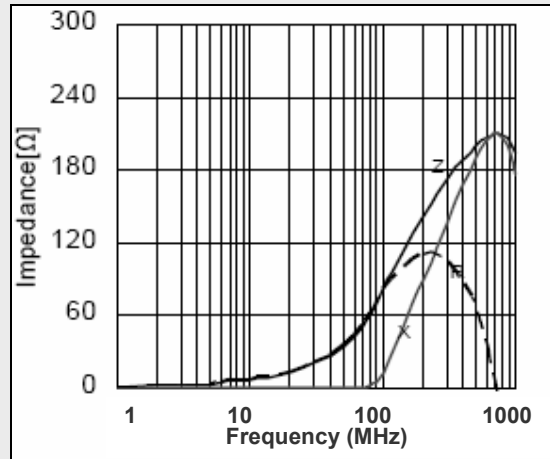

SMB-160808-F3-101B

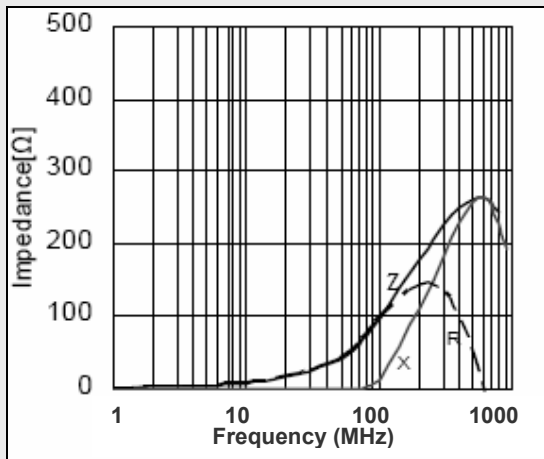


SMB-160808-F3-121B

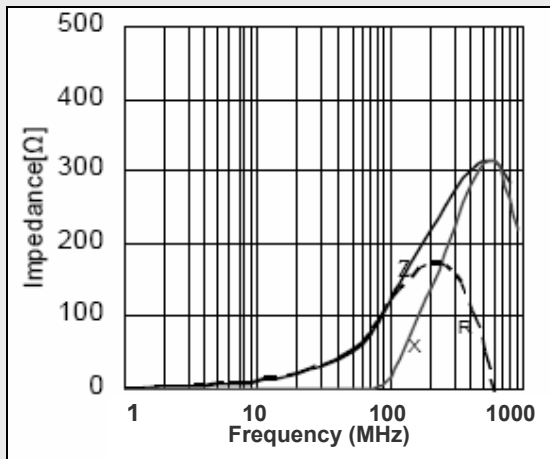


◆ TYPICAL ELECTRICAL CHARACTERISTIC CURVES


SMB-160808-F3-151B

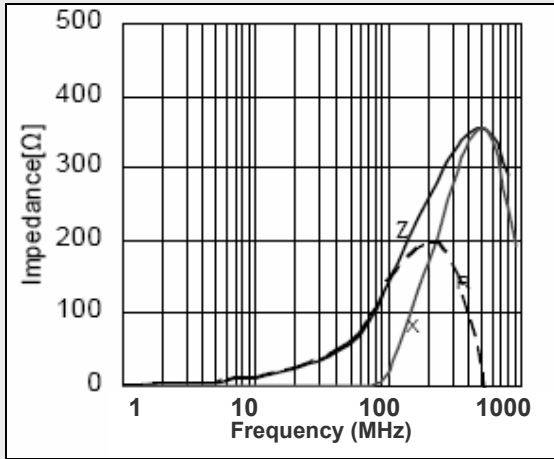


SMB-160808-F3-221B

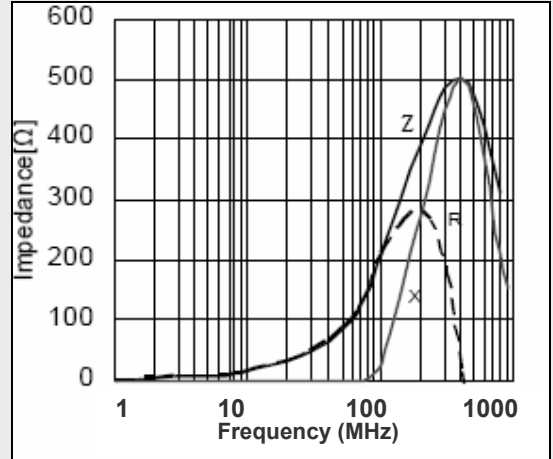


SMB-160808-F3-301B

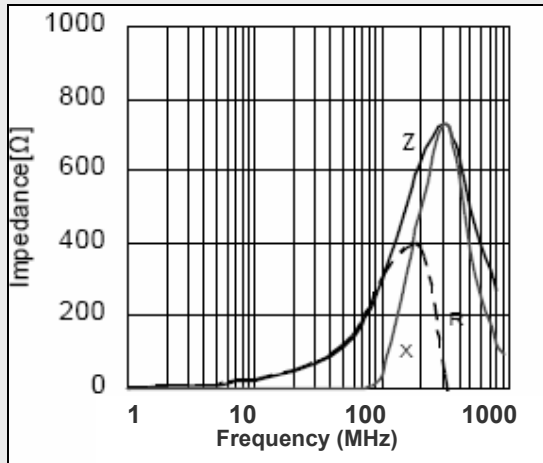

SMB-160808-F3-501B

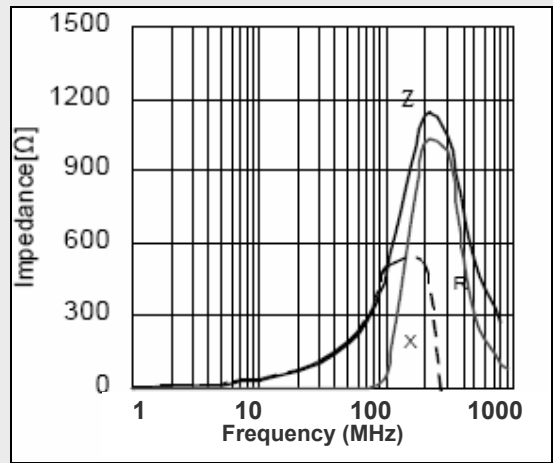

SMB-160808-F3-601B

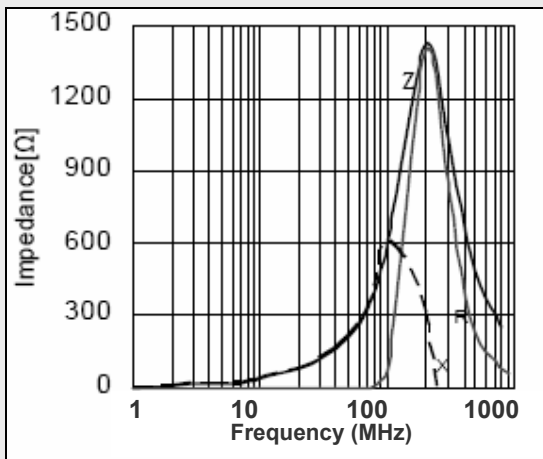

SMB-160808-F3-102B

