


## ◆ PRODUCT SPECIFICATIONS


Part Number	Impedance ( $\Omega$ ) at 100 MHz	DCR ( $\Omega$ ) Max.	Rate Current (mA) Max.
SMB-453215-F2-190P	19 $\pm$ 25%	0.05	5000
SMB-453215-F2-380P	38 $\pm$ 25%	0.06	4000
SMB-453215-F2-700P	70 $\pm$ 25%	0.06	4000
SMB-453215-F2-800P	80 $\pm$ 25%	0.08	4000
SMB-453215-F2-101P	100 $\pm$ 25%	0.08	4000
SMB-453215-F2-121P	120 $\pm$ 25%	0.08	3000
SMB-453215-F2-301P	300 $\pm$ 25%	0.15	2000

## ◆ TYPICAL ELECTRICAL CHARACTERISTIC CURVES

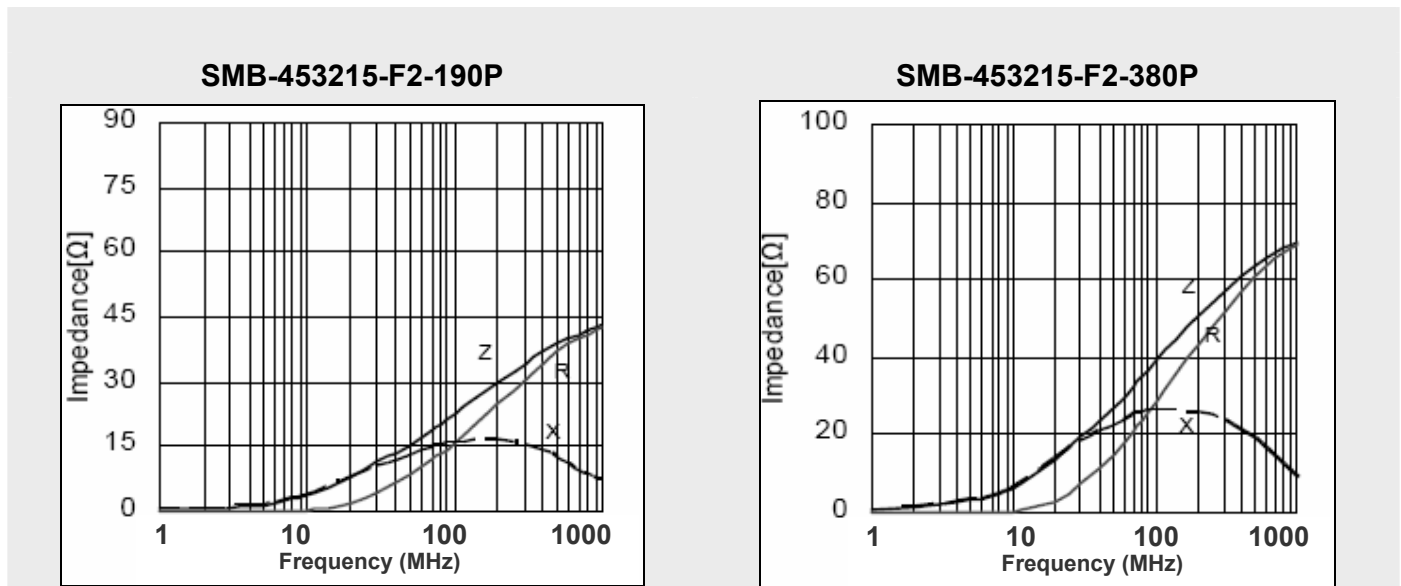


◆ TYPICAL ELECTRICAL CHARACTERISTIC CURVES


SMB-453215-F2-700P

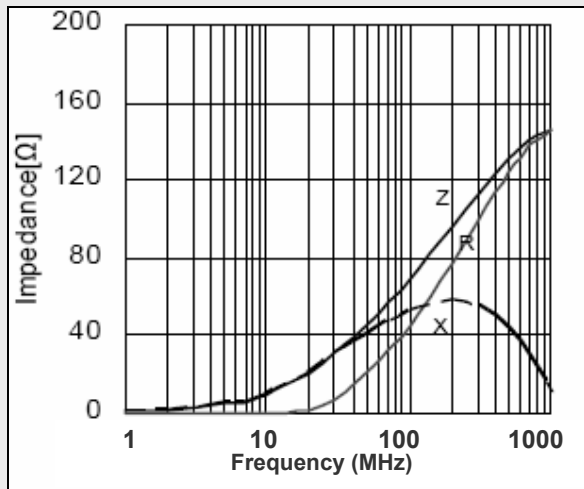


SMB-453215-F2-800P

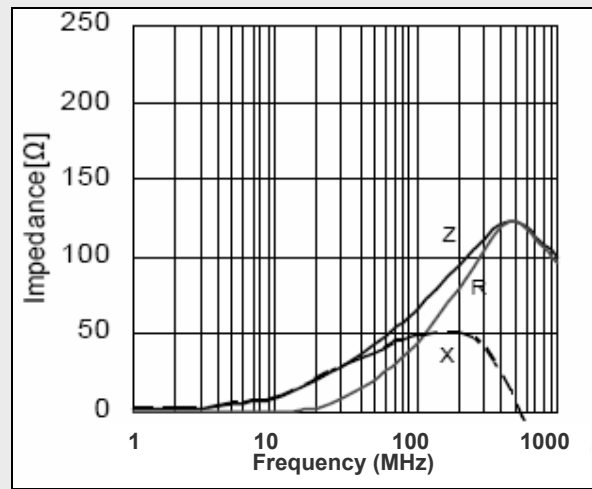

SMB-453215-F2-101P

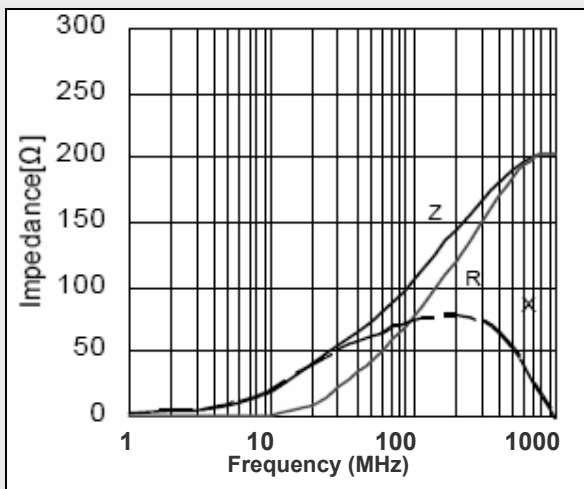

SMB-453215-F2-121P

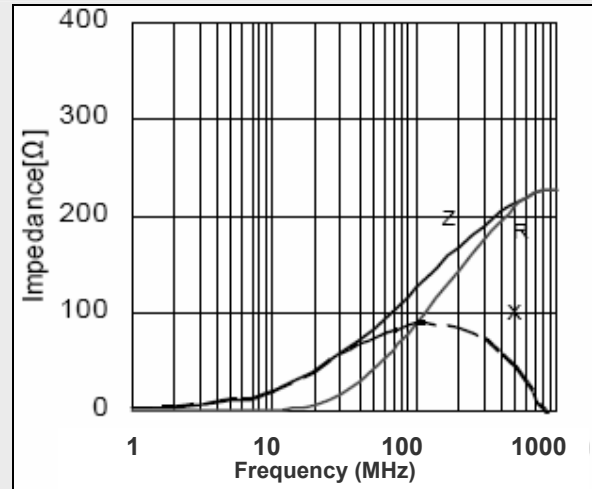

SMB-453215-F2-301P

