


◆ PRODUCT SPECIFICATIONS


Part Number	Impedance (Ω) at 100 MHz	DCR (Ω) Max.	Rated Current (mA) Max.
SMB-322513-F2-190P	19 \pm 25%	0.05	4500
SMB-322513-F2-260P	26 \pm 25%	0.05	4000
SMB-322513-F2-310P	31 \pm 25%	0.05	4000
SMB-322513-F2-600P	60 \pm 25%	0.06	4000
SMB-322513-F2-800P	80 \pm 25%	0.08	3000
SMB-322513-F2-121P	120 \pm 25%	0.10	3000
SMB-322513-F2-151P	150 \pm 25%	0.10	3000
SMB-322513-F2-181P	180 \pm 25%	0.10	3000
SMB-322513-F2-221P	220 \pm 25%	0.15	3000
SMB-322513-F2-601P	600 \pm 25%	0.20	2000
SMB-322513-F2-801P	800 \pm 25%	0.25	1000
SMB-322513-F2-102P	1000 \pm 25%	0.30	1000

◆ TYPICAL ELECTRICAL CHARACTERISTIC CURVES

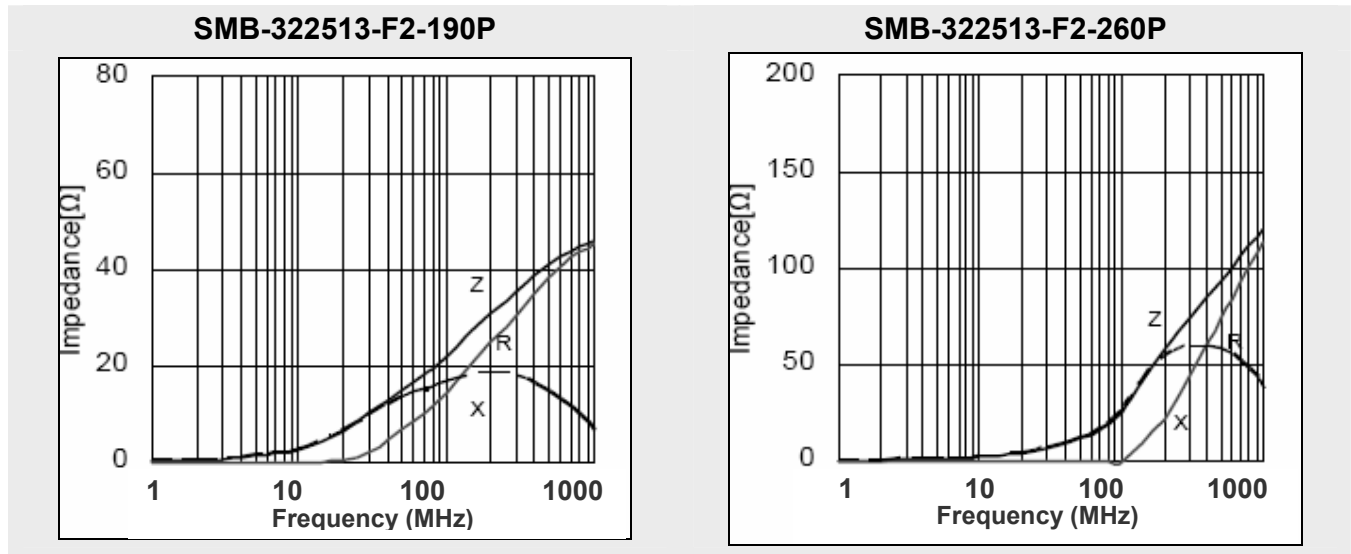


◆ TYPICAL ELECTRICAL CHARACTERISTIC CURVES


SMB-322513-F2-310P

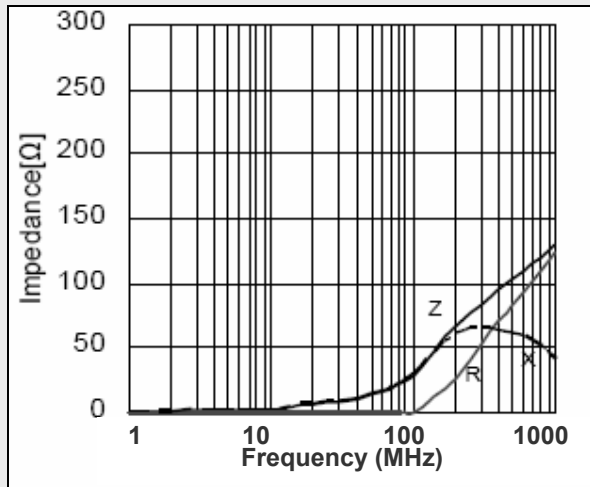


SMB-322513-F2-600P

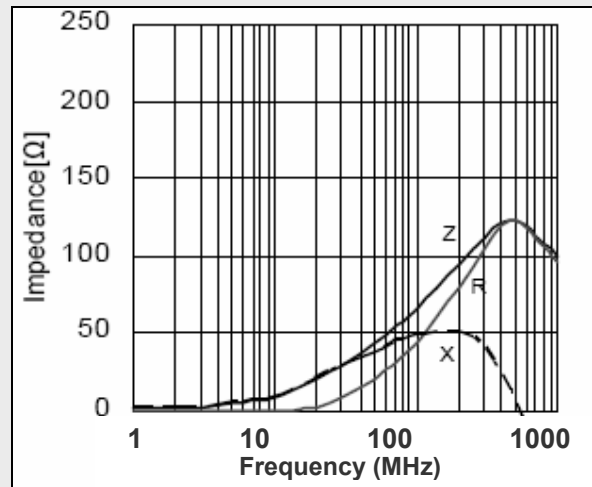


SMB-322513-F2-800P

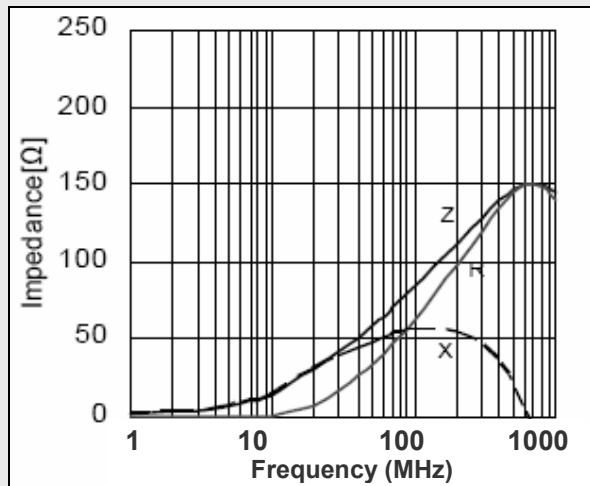


SMB-322513-F2-121P

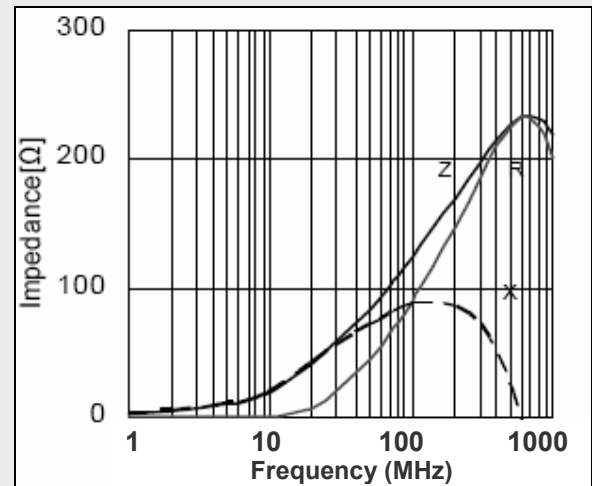

SMB-322513-F2-151P

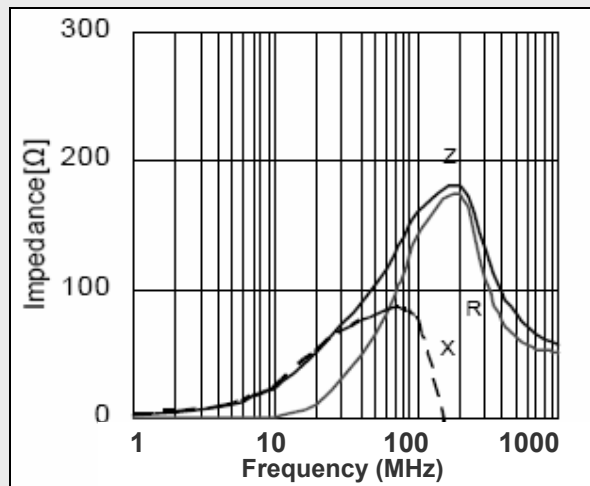


SMB-322513-F2-181P

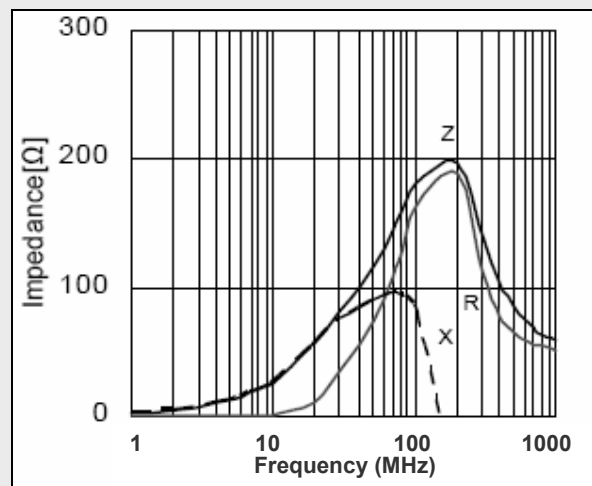


◆ TYPICAL ELECTRICAL CHARACTERISTIC CURVES


SMB-322513-F2-221P

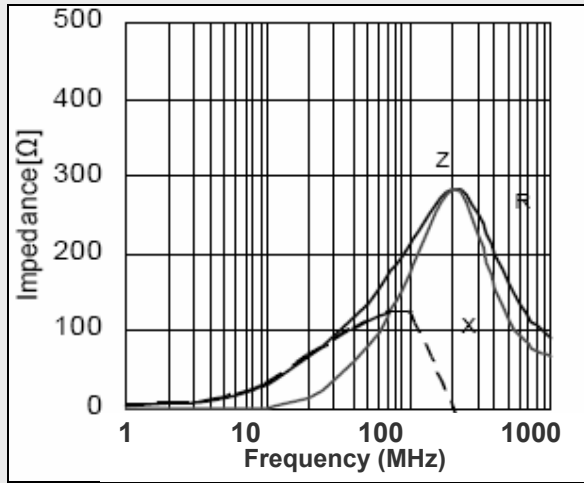

SMB-322513-F2-601P

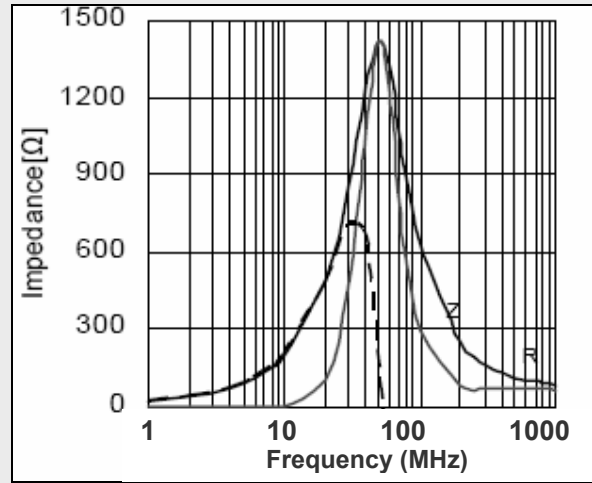

SMB-322513-F2-801P

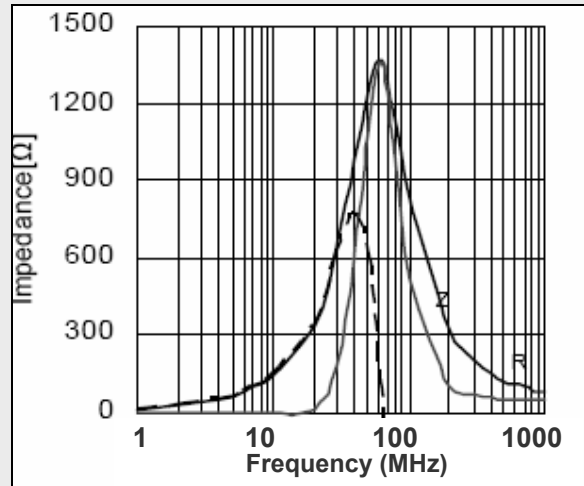

SMB-322513-F2-102P

