www.DataSheet4U.com

2SK1257

Silicon N-channel Power F-MOS FET

■ Features

- Low ON resistance R_{DS} (on) : R_{DS} (on) 1 = 0.024Ω (typ.)
- High switching rate : t_f = 320ns (typ.)
- No secondary breakdown
- Low voltage drive is possible (V_{GS} = 4V).

■ Application

- DC-DC converter
- No contact relay
- Solenoid drive
- Motor drive

■ Package Dimensions

Unit: mm

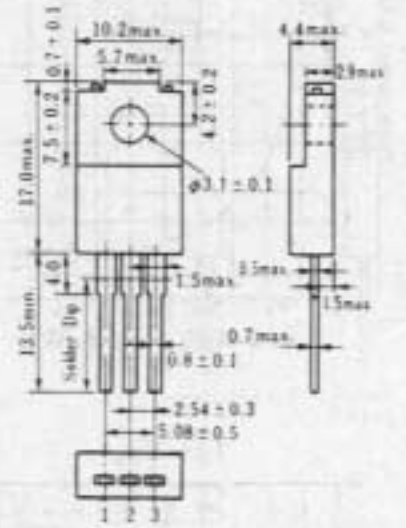

1 : Gate
2 : Drain
3 : Source

TO-220 full pack package (a type)

■ Absolute Maximum Ratings (Tc=25°C)

Item		Symbol	Value	Unit
Drain-source voltage		V_{DSS}	60	V
Gate-source voltage		V_{GSS}	±20	V
Drain current	At 4V driving	I_D	20	A
	DC	I_D	40	
	Peak-to-peak value	I_{DP}	80	
Power dissipation	Tc=25℃	P_D	45	W
	Ta=25℃		2.0	
Channel temperature		T_{ch}	150	℃
Storage temperature		T_{stg}	−55~+150	℃

■ Electrical Characteristics (Tc=25°C)

Item	Symbol	Condition	min.	typ.	max.	Unit
Drain current	I_{DSS}	V_{DS}=40V, V_{GS}=0			10	μA
Gate-source current	I_{GSS}	V_{GS}=±20V, V_{DS}=0			±1	μA
Drain-source voltage	V_{DSS}	I_D=1 mA, V_{GS}=0	60			V
Gate threshold voltage	V_{th}	V_{DS}=10V, I_D=1mA	1		2.5	V
Drain-source ON resistance	R_{DS}(on)1*	V_{GS}=10V, I_D=20A		0.024	0.035	Ω
Drain-source ON resistance	R_{DS}(on)2	V_{GS}=4V, I_D=10A		0.033	0.05	Ω
Forward transfer admittance	|Yfs|	V_{DS}=10V, I_D=20A	13	22		S
Input capacitance	C_{iss}	V_{DS}=10V, V_{GS}=0, f=1MHz		3200		pF
Output capacitance	C_{oss}			1400		pF
Reverse transfer capacitance	C_{rss}			600		pF
Turn-on time	t_{on}	V_{GS}=10V, I_D=20A, V_{DD}≒30V, R_L=1.5Ω		200		ns
Fall time	t_f			320		ns
Delay time	t_d(off)			690		ns

www.DataSheet4U.com

DataSheet4U.com