


> Features

- High Speed Switching
- Low On-Resistance
- No Secondary Breakdown
- Low Driving Power
- High Voltage
- V_{GS} = ± 30V Guarantee
- Repetitive Avalanche Rated

> Applications

- Switching Regulators
- UPS
- DC-DC converters
- General Purpose Power Amplifier

> Outline Drawing

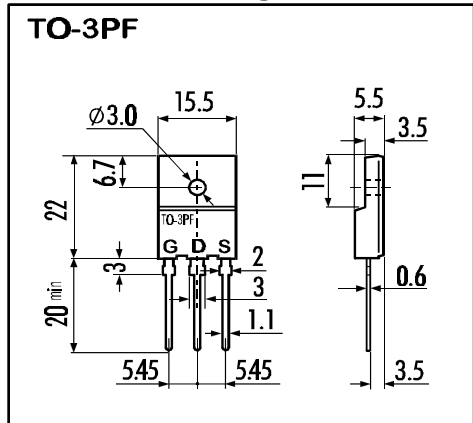


> Maximum Ratings and Characteristics

- Absolute Maximum Ratings (T_c=25°C), unless otherwise specified

| Item | Symbol | Rating | Unit |
|--|----------------------|------------|------|
| Drain-Source-Voltage | V _{DS} | 800 | V |
| Continous Drain Current | I _D | 9 | A |
| Pulsed Drain Current | I _{D(puls)} | 36 | A |
| Gate-Source-Voltage | V _{GS} | ±30 | V |
| Repetitive or Non-Repetitive (T _{ch} ≤ 150°C) | I _{AR} | 9 | A |
| Avalanche Energy | E _{AS} | 141 | mJ |
| Max. Power Dissipation | P _D | 100 | W |
| Operating and Storage Temperature Range | T _{ch} | 150 | °C |
| | T _{stg} | -55 ~ +150 | °C |

> Equivalent Circuit

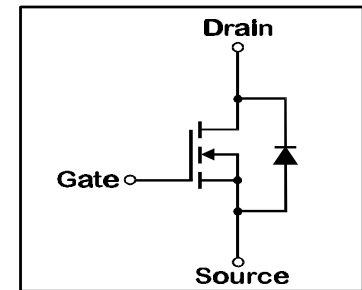

- Electrical Characteristics (T_C=25°C), unless otherwise specified

| Item | Symbol | Test conditions | Min. | Typ. | Max. | Unit |
|---|----------------------|--|------|------|------|------|
| Drain-Source Breakdown-Voltage | V _{(BR)DSS} | I _D =1mA V _{GS} =0V | 800 | | | V |
| Gate Threshold Voltage | V _{GS(th)} | I _D =1mA V _{DS} =V _{GS} | 3,5 | 4,0 | 4,5 | V |
| Zero Gate Voltage Drain Current | I _{DSS} | V _{DS} =800V T _{ch} =25°C | | 10 | 500 | μA |
| | | V _{GS} =0V T _{ch} =125°C | | 0,2 | 1,0 | mA |
| Gate Source Leakage Current | I _{GSS} | V _{GS} =±30V V _{DS} =0V | | 10 | 100 | nA |
| Drain Source On-State Resistance | R _{DS(on)} | I _D =4,5A V _{GS} =10V | | 1,28 | 1,50 | Ω |
| Forward Transconductance | g _{fs} | I _D =4,5A V _{DS} =25V | | 6 | | S |
| Input Capacitance | C _{iss} | V _{DS} =25V | | 1200 | | pF |
| Output Capacitance | C _{oss} | V _{GS} =0V | | 180 | | pF |
| Reverse Transfer Capacitance | C _{rss} | f=1MHz | | 90 | | pF |
| Turn-On-Time t _{on} (t _{on} =t _{d(on)} +t _r) | t _{d(on)} | V _{CC} =600V | | 30 | | ns |
| | | I _D =9A | | 120 | | ns |
| Turn-Off-Time t _{off} (t _{off} =t _{d(off)} +t _f) | t _{d(off)} | V _{GS} =10V | | 95 | | ns |
| | | R _{GS} =10 Ω | | 60 | | ns |
| Avalanche Capability | I _{AV} | L = 100μH T _{ch} =25°C | 9,0 | | | A |
| Diode Forward On-Voltage | V _{SD} | I _F =2I _{DR} V _{GS} =0V T _{ch} =25°C | | 1,0 | | V |
| Reverse Recovery Time | t _{rr} | I _F =I _{DR} V _{GS} =0V | | 900 | | ns |
| Reverse Recovery Charge | Q _{rr} | -di _F /dt=100A/μs T _{ch} =25°C | | 12 | | μC |

- Thermal Characteristics

| Item | Symbol | Test conditions | Min. | Typ. | Max. | Unit |
|--------------------|-----------------------|-----------------|------|------|------|------|
| Thermal Resistance | R _{th(ch-a)} | channel to air | | | 30 | °C/W |
| | R _{th(ch-c)} | channel to case | | | 1,25 | °C/W |













| | | | |
|-------------------|------|----|------|
| N-channel MOS-FET | | | |
| 800V | 1,5Ω | 9A | 100W |

2SK2649-01R

FAP-IIS Series



> Characteristics

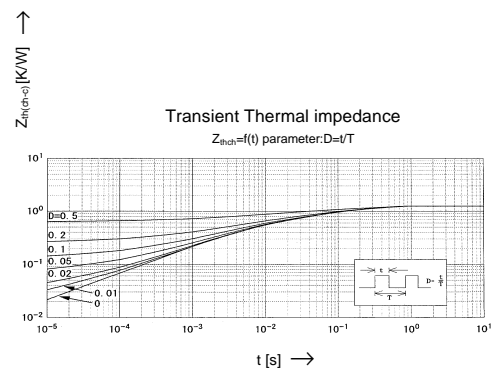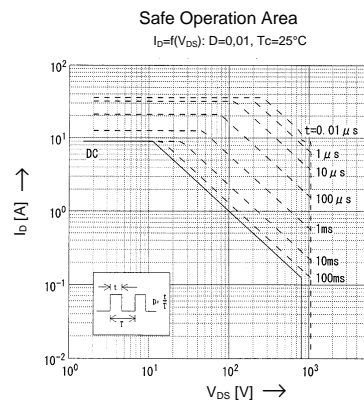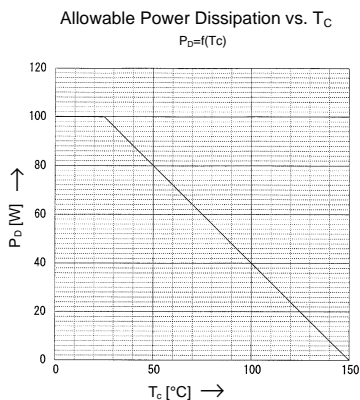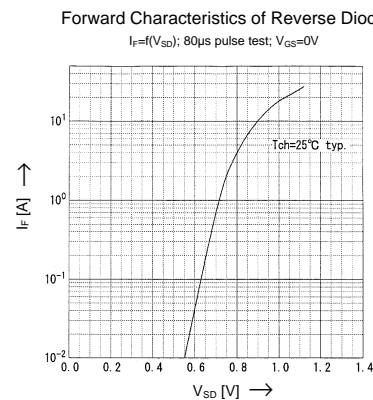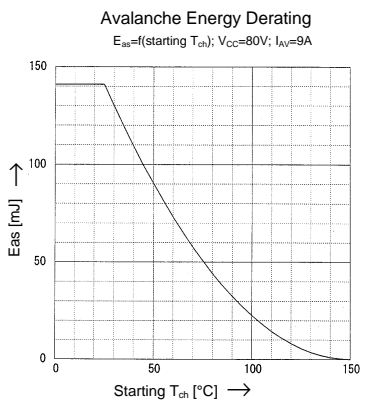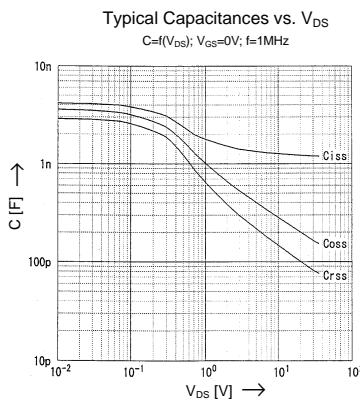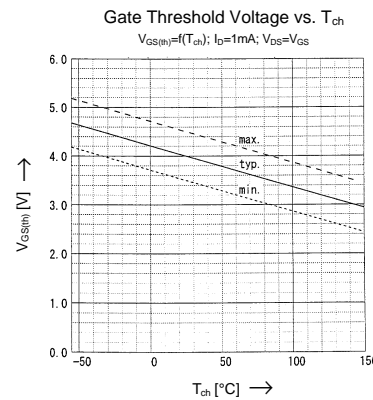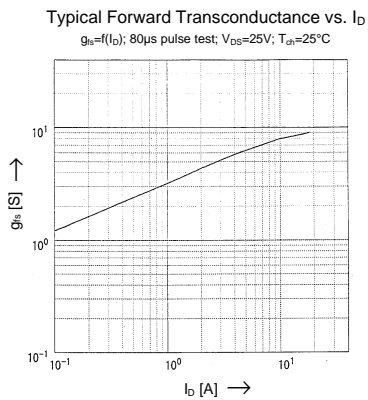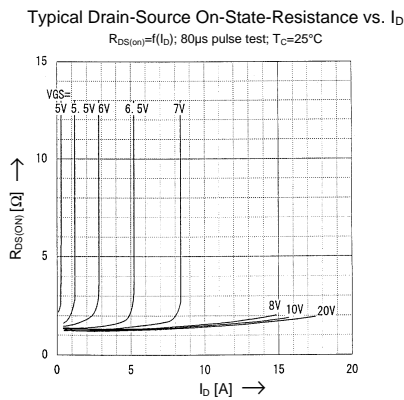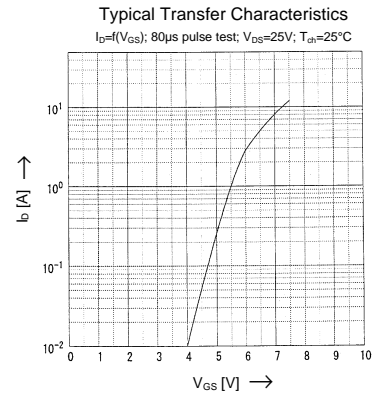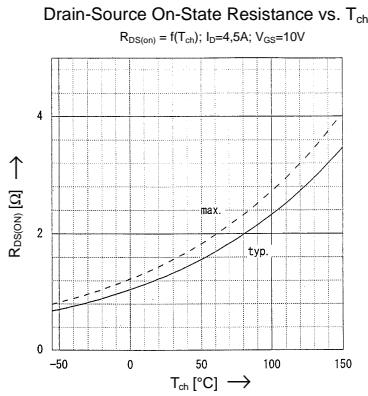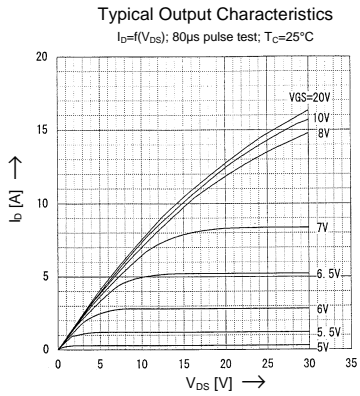

This specification is subject to change without notice!