


TA-I	Thick Film Chip Resistors Low Resistance (for 0805)	No	TRL-100S003C
		page	1/9

1. Scope :

This specification applies for the RL10(0805) of thick film chip resistors made by TA-I.


2. Construction:

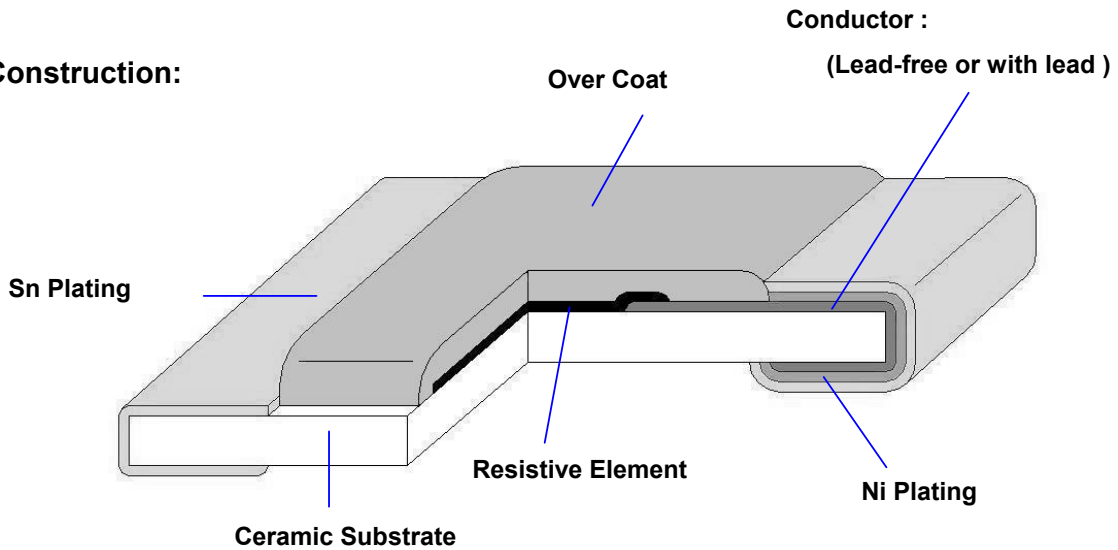

3. Type Designation:

<u>RL</u>	<u>10</u>	<u>F</u>	<u>TN</u>	<u>R100</u>
Product Code	Size	Tolerance	Packaging	Nominal Resistance
RL : Chip Resistor	Power Rating			
10-0805(2012) 1/4W		J- ±5% G- ±2% F- ±1%	TN-Lead Free & Paper Tape	4 Digits e.g., (E24) R100=0.1Ω

4. Dimensions:

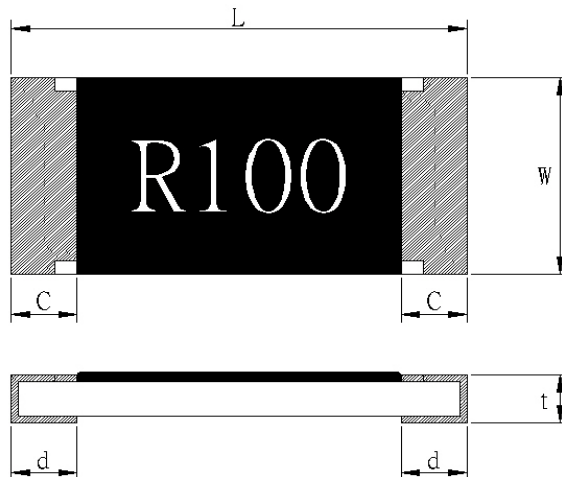

UNIT: mm

Type	L	W	C	d	t
RL10	2.00 ±0.10	1.25 ±0.10	0.40 ±0.20	0.35 ±0.20	0.50 ±0.10

5. Ratings & Characteristics :

Characteristics	Feature	Measurement Method
	RL10	
Power Ratings (W)	1/4W	JIS Code 3A / JIS Code 3D
Resistance Value (mΩ)	100 ~ 910	Refer to JIS C 5202 5.1
T.C.R (ppm/°C)	±250	Refer to JIS C 5202 5.2
Operation Temperature Range (°C)	-55 ~ +125	
Resistance Tolerance (%)	± 1, ± 2, ± 5	JIS C 5201 4.2.5
Insulation Resistance (MΩ)	Over 100	Refer to JIS C 5202 5.6 Mounting condition G
Maximum Working Voltage (V)	0.476V	(P * R) ^{1/2}

Note : Except for the above standardized products, we also provide the customized products.

TA-I	Thick Film Chip Resistors Low Resistance (for 0805)	No	TRL-100S003C
		page	3/9

5.1 Derating Curve :

For resistors operated at ambient temperature over 70°C , power rating shall be derated in accordance with figure 1.

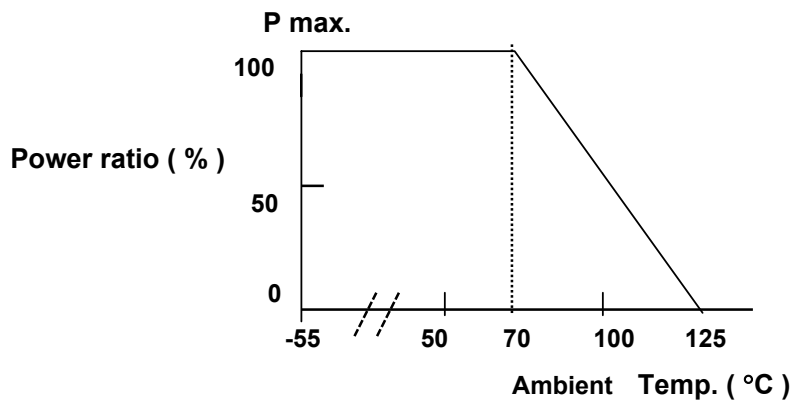


Figure 1

5.2 Rated Voltage:

The rated voltage is calculated by the following formula:

$$E = \sqrt{P * R}$$

E=Rated Voltage(V)

P=Rated Power(W)

R=Resistance Value(Ω)

TA-I	Thick Film Chip Resistors Low Resistance (for 0805)	No	TRL-100S003C
		page	4/9

6. Reliability Tests:(As specified in JIS C 5202)

Test Items	Reference standard	Condition of Test	Test Limits
Temperature Coefficient of Resistance	JIS - C5202 - 5.2	-55 ~ +125 °C	Refer to paragraph 5
Short Time Overload	JIS - C5202 - 5.5	2.5 X rated voltage, 5s	± 2% + 0.005 Ω
Load Life	JIS - C5202 - 7.10	1000 hours at rated power , 70°C , 1.5hours "ON " , 0.5hour "OFF"	± 3% + 0.001 Ω
Load Life with Humidity	JIS - C5202 - 7.9	1000 hours at rated power , 40 ± 2°C , 90 ~ 95% RH 1.5hours "ON " , 0.5hour "OFF"	± 3% + 0.001 Ω
Rapid Change of Temperature	JIS - C5202 - 7.4	- 55°C (30 min.) / +125 °C (30 min.) 5 cycles	± 1% + 0.005 Ω
Resistance to Soldering Heat	JIS - C5202 - 6.10	270 ± 5°C solder , 10 ± 1 sec dwell .	± 1% + 0.005 Ω
Solderability	JIS - C5202 - 6.11	245±5°C solder, 2±0.5 sec dwell. Solder : Sn96.5 / Ag3.0 / Cu0.5	At least 95% of surface area of electrode shall be covered with new solder.
Robustness of Termination (Bending Strength)	JIS - C5202 - 6.1	3mm deflection	± 1% + 0.005 Ω
Resistance to Dry Heat	JIS - C5202 - 7.2	125 ± 5°C for 96 ± 4hrs	1%: ± (1%+0.005 Ω) 2%,5%:± (2%+0.005 Ω)

Note* :RCWV : Rated continuous working voltage .

7. Marking

7.1 E24: 1%

Resistance value is expressed by 4 digits, the first "R" means decimal point and the other digits represent for the normal resistance in Ω .

e.g., R100 =100 mΩ

7.2 E24: 2%,5%


Resistance value is expressed by 3 digits, the first "R" means decimal point and the other digits represent for the normal resistance in Ω .

e.g., R10 =100 mΩ

8. Taping & Reel

8.1 Taping Dimensions

8.1.1 4 mm pitch paper


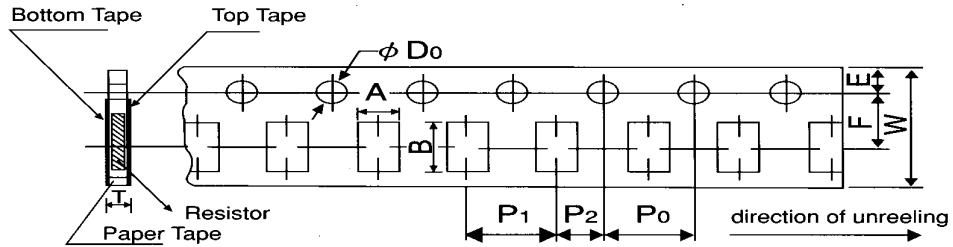


Packing	Type	A	B	W	F	E	P ₁	P ₂	P ₀	D ₀	T
Paper Tape	RL10	1.6 ±0.15	2.4 ±0.2	8.0 ±0.2	3.5 ±0.05	1.75 ±0.1	4.0 ±0.1	2.0 ±0.05	4.0 ±0.1	φ 1.5 ^{+0.1} ₋₀	0.84 ±0.1

UNIT: mm

Type Size		Paper Tape
		4 mm pitch
		178mm/R
RL	10	5000

8.2 Reel Specifications

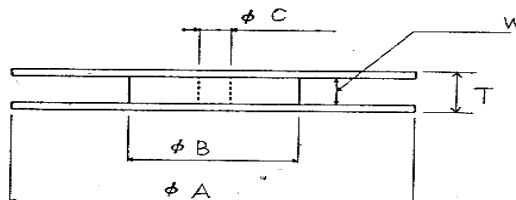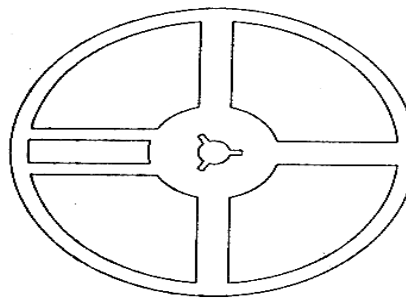


TA-I	Thick Film Chip Resistors Low Resistance (for 0805)	No	TRL-100S003C
		page	6/9

UNIT: mm

Series	ϕA	ϕB	ϕC	W	T
RL 10	178 \pm 2.0	60.0 \pm 1.0	13.0 \pm 1.0	9.0 \pm 1.0	11.5 \pm 1.0


8.3 Peel –off force :

Peel –off force of paper and blister tape is in accordance with “JIS ”
that is , 0.1 to 0.7 N at a peel-off speed of 300 mm / minute.

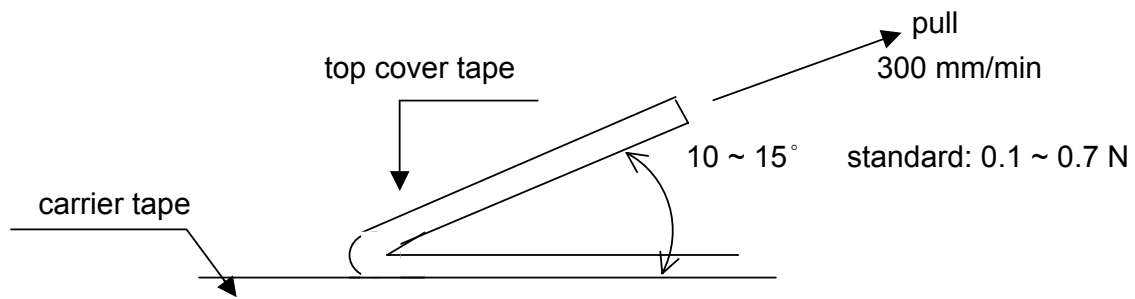


9. Label

9.1 Manufacture Label :

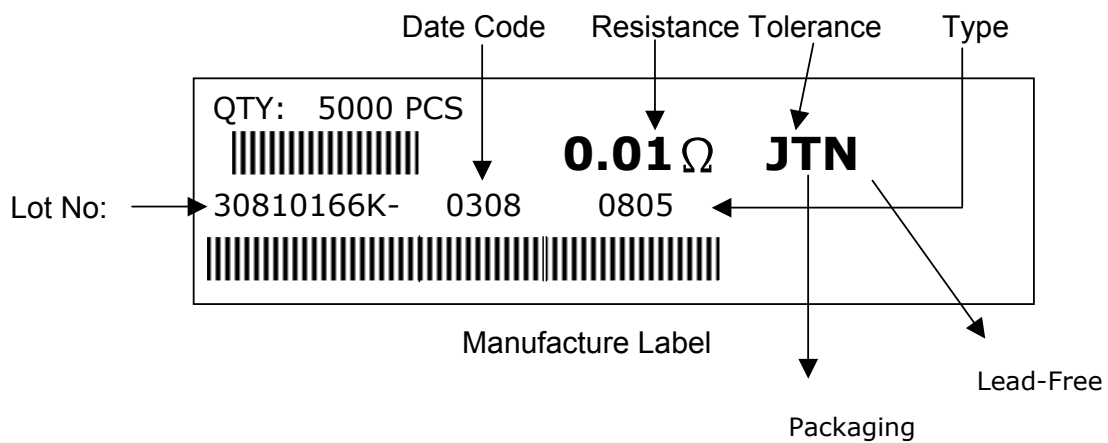


TA-I TECHNOLOGY CO., LTD

9.2 Customer Label(By customer request):

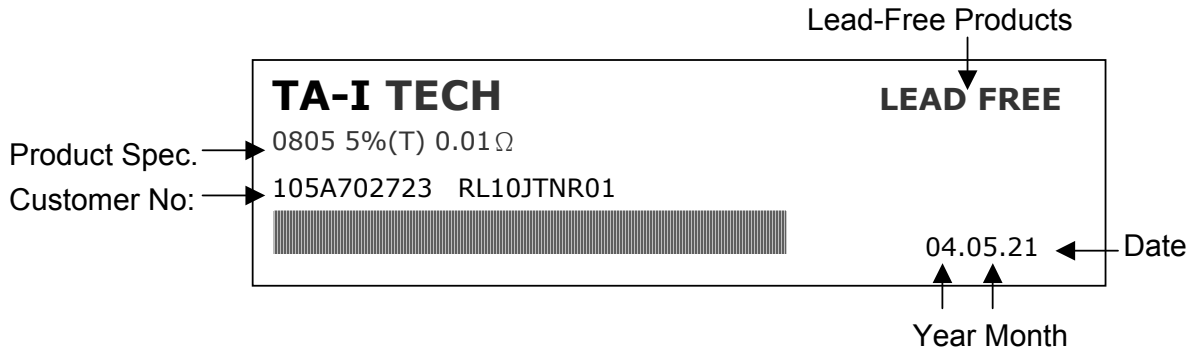


10. Recommended land patterns

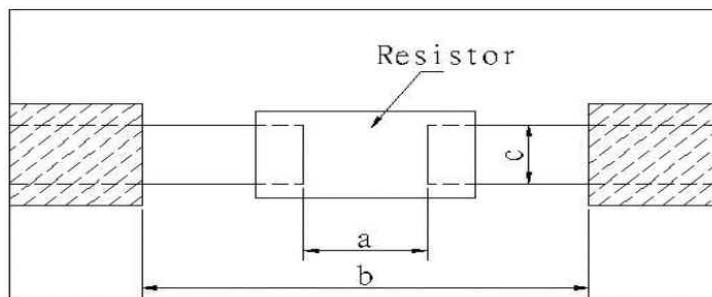

Land pattern		Dimension (mm)		
Type	Size	a	b	c
RL	10 (0805)	1.0~1.4	3.2~3.8	0.9~1.4

11. Recommend IR – Reflow profile : (Lead-Free solder : Sn96.5 / Ag3 / Cu0.5)

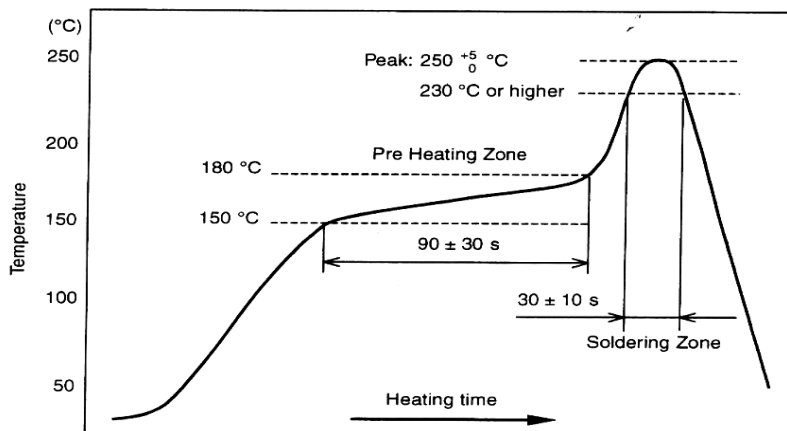

Peak : $250 \begin{matrix} +5 \\ -0 \end{matrix} ^\circ\text{C}$, 5 sec
 Pre – heat Zone : 150 to 180 °C , 90±30 sec
 Soldering Zone : 230°C or higher , 30±10 s

TA-I	Thick Film Chip Resistors Low Resistance (for 0805)	No	TRL-100S003C
		page	8/9

12. Storage Conditions:

Temperature: 5°C~35°C, Humidity: 40%~75%

13. Shelf Life:

2 years from manufacturing date

14. ECN

Engineering Change Notice: The customer will be informed with ECN if there is significant modification on the characteristics and materials described in Approval Sheet.

15. Manufacturing Country & City :

TA-I TECHNOLOGY CO., LTD. (Taiwan– Tao Yuan)

Tel: 886-3-3246169 Fax : 886-3-3246167

Associated companies :

(1) FORTUNE TASK RESISTOR FACTORY (China – Dongguan)

Tel : 86-769-8339-4790~3 Fax : 86-769-8339-4794

(2) TA-I TECHNOLOGY (DONGGUAN) CO., LTD. (China –Dongguan)

Tel : 86-769-8339-4790~3 Fax : 86-769-8339-4794

(3) TA-I TECHNOLOGY (SU ZHOU) CO., LTD. (China – Su Zhou)

Tel :86- 512-63457879 Fax : 86-512-63457869

(4) TAI OHM ELECTRONICS (M) SDN. BHD. (Malaysia – Pulaupinang)

Tel :604- 3900480 Fax : 604-3901481

(5) P.T.TAI ELECTRONICS Indonesia (Indonesia – Jakarta)

Tel :002-62-21-44820254 Fax : 002-62-21-44820256

TA-I TECHNOLOGY CO., LTD

TA-I	Thick Film Chip Resistors Low Resistance (for 0805)	No	TRL-100S003C
		page	9/9

Revise record

Date	Content	Owner		
Jul.12.2006	<ol style="list-style-type: none"> 1. Adding "Recommend IR – Reflow profile" 2. Adding Customer label 3. Adding shelf life 4. 2. Conductor : Adding to (Lead-free or with lead) 5. 3. Type Designation: 10-0805 changed 10-0805(2012) 6. Reliability Tests: <ul style="list-style-type: none"> Solderability : 235 ± 5°C solder, 2 ± 0.5 sec dwell. Changed to 245±5°C solder, 2±0.5 sec dwell. Solder : Sn96.5 / Ag3.0 / Cu0.5 Resistance to Dry Heat <ul style="list-style-type: none"> Test Limits : ± 3%+0.005 Ω changed 1%: ± (1%+0.005 Ω) 2%,5%:±(2%+0.005 Ω) 7. 8.2 Reel Specifications: <ul style="list-style-type: none"> φ A 180+0 / -3.0 changed 178 ±2.0 φ B 60 min changed 60.0±1.0 T 11.4 ±2.0 changed 11.5 ±1.0 8. 9.1 Manufacture label : <ul style="list-style-type: none"> Series number 3 codes changed to 4 codes 9. 10. Recommended land patterns : <ul style="list-style-type: none"> a 1.3 changed 1.0~1.4 b 3.5 changed 3.2~3.8 c 1.05 changed 0.9~1.4 10. 15. Manufacturing Country & City: <ul style="list-style-type: none"> Adding TA-I TECHNOLOGY (DONGGUAN) CO., LTD 	Vincent		
Mar.02.2007	Adding 5.Ratings & Characteristics : <table border="1" style="margin-left: 40px; width: 300px; height: 20px;"> <tr> <td style="padding: 2px;">Maximum Working Voltage</td> <td style="padding: 2px; text-align: center;">0.476V</td> </tr> </table>	Maximum Working Voltage	0.476V	Vincent
Maximum Working Voltage	0.476V			