

SB340-E THRU SB360-E**SCHOTTKY BARRIER
RECTIFIER**

VOLTAGE: 40 to 60V


CURRENT: 3.0A

**FEATURE**

High current capability, Low forward voltage drop
 Low power loss, high efficiency
 High surge capability
 High temperature soldering guaranteed
 250°C /10sec/0.375" lead length at 5 lbs tension

MECHANICAL DATA

Terminal: Plated axial leads solderable per
 MIL-STD 202E, method 208C
 Case: Molded with UL-94 Class V-0 recognized Halogen Free
 Epoxy
 Polarity: color band denotes cathode
 Mounting position: any

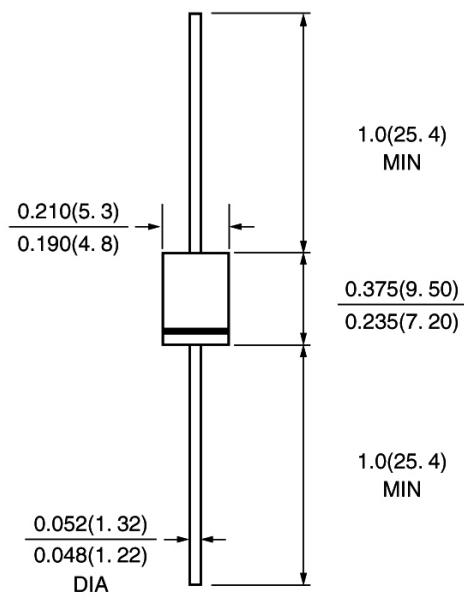DO-201AD**MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS**

(single-phase, half-wave, 60HZ, resistive or inductive load rating at 25°C, unless otherwise stated)

	SYMBOL	SB340-E	SB360-E	units
Maximum Recurrent Peak Reverse Voltage	Vrrm	40	60	V
Maximum RMS Voltage	Vrms	28	42	V
Maximum DC blocking Voltage	Vdc	40	60	V
Maximum Average Forward Rectified Current 3/8" lead length	If(av)	3.0		A
Peak Forward Surge Current 8.3ms single half sine-wave superimposed on rated load	Ifsm	100		A
Maximum Forward Voltage at 3.0A DC	Vf	0.50	0.74	V
Maximum DC Reverse Current Ta =25°C at rated DC blocking voltage Ta =100°C	Ir	0.5 20.0		mA
Typical Junction Capacitance (Note 1)	Cj	220.0		pF
Typical Thermal Resistance (Note 2)	Rth(ja)	30.0		°C /W
Storage and Operating Junction Temperature	Tstg, Tj	-65 to +125	-65 to +150	°C

Note:

1. Measured at 1.0 MHz and applied reverse voltage of 4.0Vdc
2. Thermal Resistance from Junction to Ambient at 0.5" lead length, vertical P.C. Board Mounted

RATINGS AND CHARACTERISTIC CURVES SB340-E THRU SB360-E

Fig. 1 - Forward Current Derating Curve

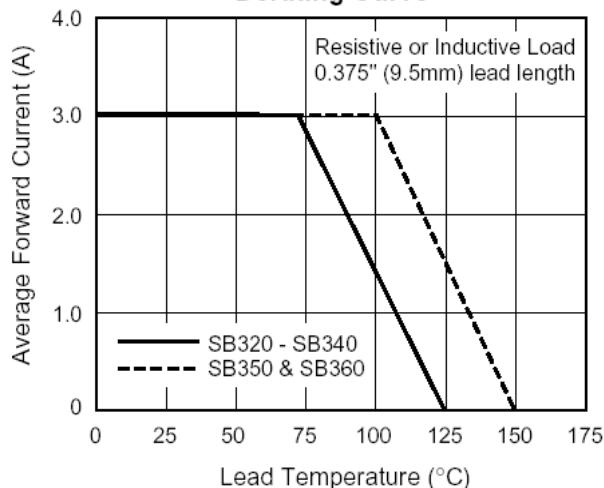


Fig. 2 - Maximum Non-repetitive Peak Forward Surge Current

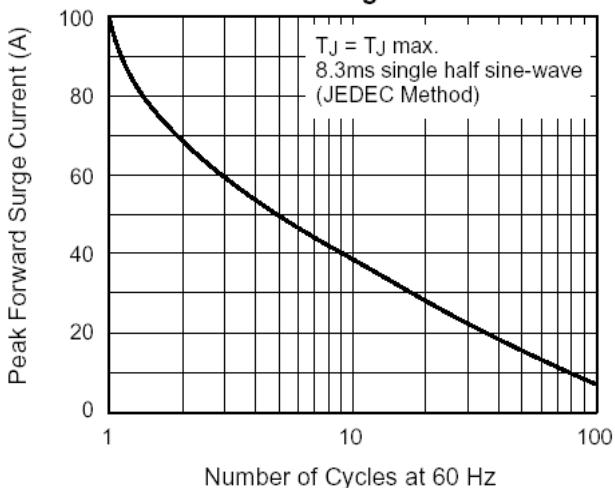


Fig. 3 - Typical Instantaneous Forward Characteristics

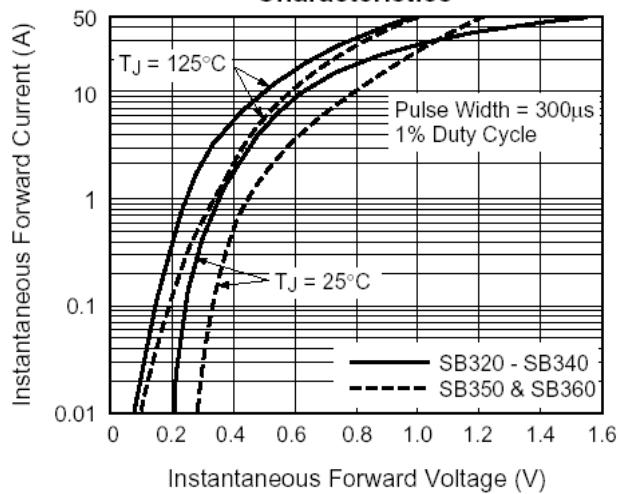


Fig. 4 - Typical Reverse Characteristics

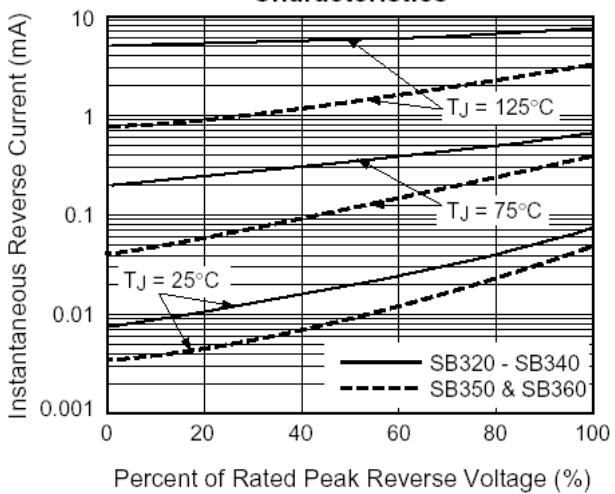


Fig. 5 - Typical Junction Capacitance

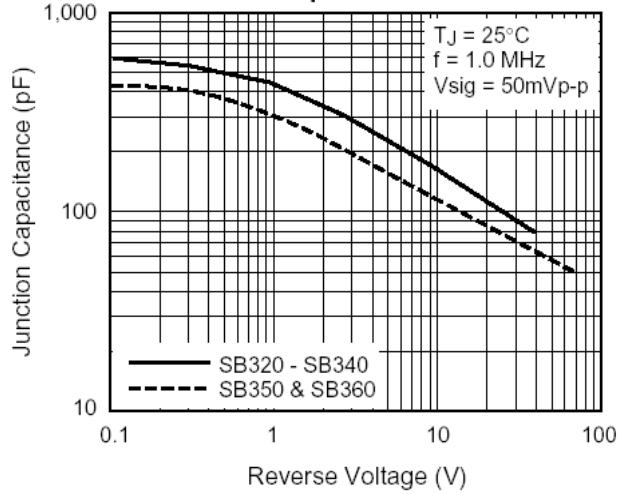


Fig. 6 - Typical Transient Thermal Impedance

