74AVC4T245

4-bit dual supply translating transceiver with configurable voltage translation; 3-state

Rev. 01 — 20 July 2009 Product data sheet

1. General description

The 74AVC4T245 is an 4-bit, dual supply transceiver that enables bidirectional level translation. The device can be used as two 2-bit transceivers or as a 4-bit transceiver. It features two data input-output ports (nAn and nBn), a direction control input (nDIR), a output enable input ($n\overline{OE}$) and dual supply pins ($V_{CC(A)}$ and $V_{CC(B)}$). Both $V_{CC(A)}$ and $V_{CC(B)}$ can be supplied at any voltage between 0.8 V and 3.6 V making the device suitable for translating between any of the low voltage nodes (0.8 V, 1.2 V, 1.5 V, 1.8 V, 2.5 V and 3.3 V). Pins nAn, $n\overline{OE}$ and nDIR are referenced to $V_{CC(A)}$ and pins nBn are referenced to $V_{CC(B)}$. A HIGH on nDIR allows transmission from nAn to nBn and a LOW on nDIR allows transmission from nBn to nAn. The output enable input ($n\overline{OE}$) can be used to disable the outputs so the buses are effectively isolated.

The device is fully specified for partial power-down applications using I_{OFF}. The I_{OFF} circuitry disables the output, preventing any damaging backflow current through the device when it is powered down. In suspend mode when either $V_{CC(A)}$ or $V_{CC(B)}$ are at GND level, both nAn and nBn are in the high-impedance OFF-state.

2. Features

- Wide supply voltage range:
  - $V_{CC(A)}$: 0.8 V to 3.6 V
  - $V_{CC(B)}$: 0.8 V to 3.6 V
- Complies with JEDEC standards:
  - JESD8-12 (0.8 V to 1.3 V)
  - JESD8-11 (0.9 V to 1.65 V)
  - JESD8-7 (1.2 V to 1.95 V)
  - JESD8-5 (1.8 V to 2.7 V)
  - JESD8-B (2.7 V to 3.6 V)
- ESD protection:
  - HBM JESD22-A114E Class 3B exceeds 8000 V
  - MM JESD22-A115-A exceeds 200 V
  - CDM JESD22-C101C exceeds 1000 V
- Maximum data rates:
  - 380 Mbit/s (≥ 1.8 V to 3.3 V translation)
  - 200 Mbit/s (≥ 1.1 V to 3.3 V translation)
  - 200 Mbit/s (≥ 1.1 V to 2.5 V translation)
  - 200 Mbit/s (≥ 1.1 V to 1.8 V translation)
  - 150 Mbit/s (≥ 1.1 V to 1.5 V translation)

NXP founded by Philips

- 100 Mbit/s (≥ 1.1 V to 1.2 V translation)
- Suspend mode
- Latch-up performance exceeds 100 mA per JESD 78 Class II
- Inputs accept voltages up to 3.6 V
- I_{OFF} circuitry provides partial Power-down mode operation
- Multiple package options
- Specified from –40 °C to +85 °C and –40 °C to +125 °C

3. Ordering information

Table 1. Ordering information

Type number	Package			
	Temperature range	Name	Description	Version
74AVC4T245D	–40 °C to +125 °C	SO16	plastic small outline package; 16 leads; body width 3.9 mm	SOT109-1
74AVC4T245PW	–40 °C to +125 °C	TSSOP16	plastic thin shrink small outline package; 16 leads; body width 4.4 mm	SOT403-1
74AVC4T245BQ	–40 °C to +125 °C	DHVQFN16	plastic dual in-line compatible thermal enhanced very thin quad flat package; no leads; 16 terminals; body 2.5 × 3.5 × 0.85 mm	SOT763-1

4. Functional diagram

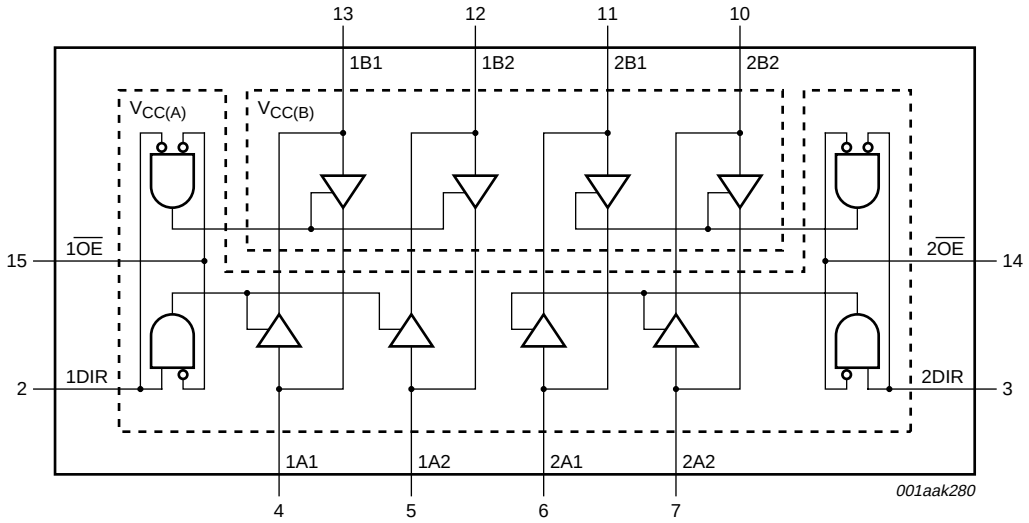

Fig 1. Logic symbol

© NXP B.V. 2009. All rights reserved.

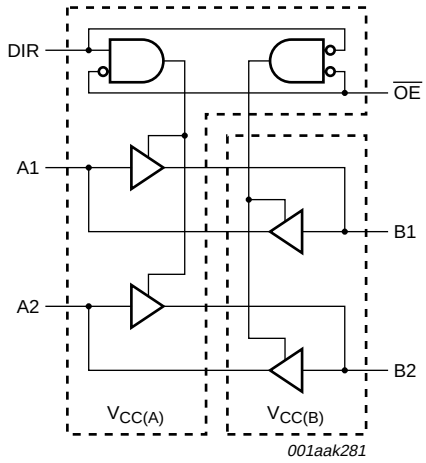

Fig 2. Logic diagram (one 2-bit transceiver)

5. Pinning information

5.1 Pinning

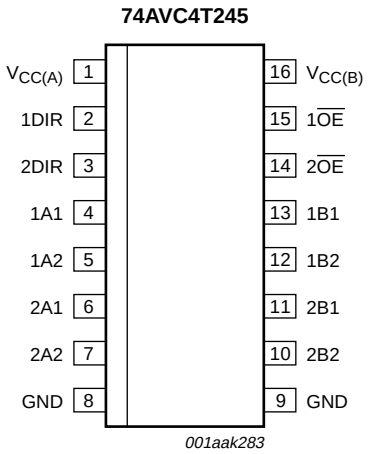

Fig 3. Pin configuration SOT109-1 (SO16)

© NXP B.V. 2009. All rights reserved.

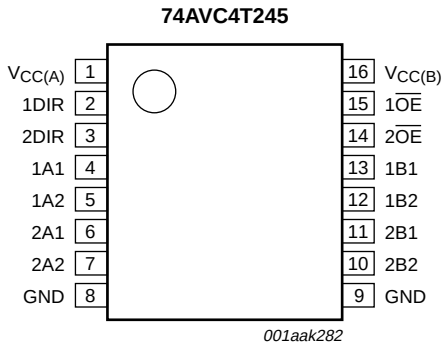

Fig 4. Pin configuration SOT403-1 (TSSOP16)

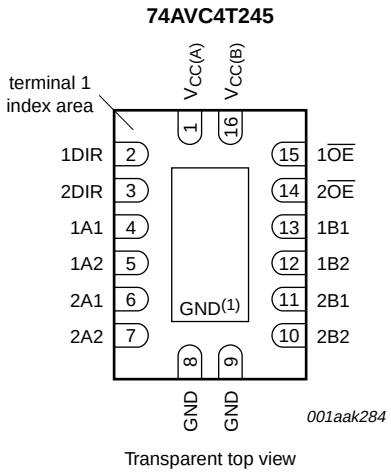

Transparent top view

(1) The die substrate is attached to this pad using conductive die attach material. It cannot be used as a supply pin or input.

Fig 5. Pin configuration SOT763-1 (DHVQFN16)

5.2 Pin description

Table 2. Pin description

Symbol	Pin	Description
$V_{CC(A)}$	1	supply voltage A (nAn, n$\overline{OE}$ and nDIR inputs are referenced to $V_{CC(A)}$)
1DIR, 2DIR	2, 3	direction control
1A1, 1A2	4, 5	data input or output
2A1, 2A2	6, 7	data input or output
GND[1]	8, 9	ground (0 V)
2B2, 2B1	10, 11	data input or output
1B2, 1B1	12, 13	data input or output
2$\overline{OE}$, 1$\overline{OE}$	14, 15	output enable input (active LOW)
$V_{CC(B)}$	16	supply voltage B (nBn inputs are referenced to $V_{CC(B)}$)

[1] All GND pins must be connected to ground (0 V).

© NXP B.V. 2009. All rights reserved.

6. Functional description

Table 3. Function table[1]

Supply voltage	Input		Input/output[3]	
$V_{CC(A)}$, $V_{CC(B)}$	$n\overline{OE}$[2]	nDIR[2]	nAn[2]	nBn[2]
0.8 V to 3.6 V	L	L	nAn = nBn	input
0.8 V to 3.6 V	L	H	input	nBn = nAn
0.8 V to 3.6 V	H	X	Z	Z
GND[3]	X	X	Z	Z

[1] H = HIGH voltage level; L = LOW voltage level; X = don't care; Z = high-impedance OFF-state.

[2] The nAn, nDIR and $n\overline{OE}$ input circuit is referenced to $V_{CC(A)}$; The nBn input circuit is referenced to $V_{CC(B)}$.

[3] If at least one of $V_{CC(A)}$ or $V_{CC(B)}$ is at GND level, the device goes into suspend mode.

7. Limiting values

Table 4. Limiting values

In accordance with the Absolute Maximum Rating System (IEC 60134). Voltages are referenced to GND (ground = 0 V).

Symbol	Parameter	Conditions		Min	Max	Unit
$V_{CC(A)}$	supply voltage A			–0.5	+4.6	V
$V_{CC(B)}$	supply voltage B			–0.5	+4.6	V
I_{IK}	input clamping current	$V_I < 0$ V		–50	-	mA
V_I	input voltage		[1]	–0.5	+4.6	V
I_{OK}	output clamping current	$V_O < 0$ V		–50	-	mA
V_O	output voltage	Active mode	[1][2][3]	–0.5	V_{CCO} + 0.5	V
		Suspend or 3-state mode	[1]	–0.5	+4.6	V
I_O	output current	V_O = 0 V to V_{CCO}	[2]	-	±50	mA
I_{CC}	supply current	$I_{CC(A)}$ or $I_{CC(B)}$		-	100	mA
I_{GND}	ground current			–100	-	mA
T_{stg}	storage temperature			–65	+150	°C
P_{tot}	total power dissipation	T_{amb} = –40 °C to +125 °C	[4]	-	500	mW

[1] The minimum input voltage ratings and output voltage ratings may be exceeded if the input and output current ratings are observed.

[2] V_{CCO} is the supply voltage associated with the output port.

[3] V_{CCO} + 0.5 V should not exceed 4.6 V.

[4] For SO16 package: above 70 °C derates linearly with 8 mW/K.
For TSSOP16 package: above 60 °C the value of P_{tot} derates linearly at 5.5 mW/K.
For DHVQFN16 package: above 60 °C the value of P_{tot} derates linearly at 4.5 mW/K.

© NXP B.V. 2009. All rights reserved.

8. Recommended operating conditions

Table 5. Recommended operating conditions

Symbol	Parameter	Conditions		Min	Max	Unit
$V_{CC(A)}$	supply voltage A			0.8	3.6	V
$V_{CC(B)}$	supply voltage B			0.8	3.6	V
V_I	input voltage			0	3.6	V
V_O	output voltage	Active mode	[1]	0	V_{CCO}	V
		Suspend or 3-state mode		0	3.6	V
T_{amb}	ambient temperature			–40	+125	°C
$\Delta t/\Delta V$	input transition rise and fall rate	V_{CCI} =0.8 V to 3.6 V	[2]	-	5	ns/V

[1] V_{CCO} is the supply voltage associated with the output port.

[2] V_{CCI} is the supply voltage associated with the input port.

9. Static characteristics

Table 6. Typical static characteristics at T_{amb} = 25 °C[1][2]

At recommended operating conditions; voltages are referenced to GND (ground = 0 V).

Symbol	Parameter	Conditions		Min	Typ	Max	Unit
V_{OH}	HIGH-level output voltage	$V_I = V_{IH}$ or V_{IL}					
		I_O = –1.5 mA; $V_{CC(A)} = V_{CC(B)}$ = 0.8 V		-	0.69	-	V
V_{OL}	LOW-level output voltage	$V_I = V_{IH}$ or V_{IL}					
		I_O = 1.5 mA; $V_{CC(A)} = V_{CC(B)}$ = 0.8 V		-	0.07	-	V
I_I	input leakage current	nDIR, n$\overline{OE}$ input; V_I = 0 V or 3.6 V; $V_{CC(A)} = V_{CC(B)}$ = 0.8 V to 3.6 V		-	±0.025	±0.25	µA
I_{OZ}	OFF-state output current	A or B port; V_O = 0 V or V_{CCO}; $V_{CC(A)} = V_{CC(B)}$ = 3.6 V	[3]	-	±0.5	±2.5	µA
		suspend mode A port; V_O = 0 V or V_{CCO}; $V_{CC(A)}$ = 3.6 V; $V_{CC(B)}$ = 0 V	[3]	-	±0.5	±2.5	µA
		suspend mode B port; V_O = 0 V or V_{CCO}; $V_{CC(A)}$ = 0 V; $V_{CC(B)}$ = 3.6 V	[3]	-	±0.5	±2.5	µA
I_{OFF}	power-off leakage current	A port; V_I or V_O = 0 V to 3.6 V; $V_{CC(A)}$ = 0 V; $V_{CC(B)}$ = 0.8 V to 3.6 V		-	±0.1	±1	µA
		B port; V_I or V_O = 0 V to 3.6 V; $V_{CC(B)}$ = 0 V; $V_{CC(A)}$ = 0.8 V to 3.6 V		-	±0.1	±1	µA
C_I	input capacitance	nDIR, n$\overline{OE}$ input; V_I = 0 V or 3.3 V; $V_{CC(A)} = V_{CC(B)}$ = 3.3 V		-	1.0	-	pF
$C_{I/O}$	input/output capacitance	A and B port; V_O = 3.3 V or 0 V; $V_{CC(A)} = V_{CC(B)}$ = 3.3 V		-	4.0	-	pF

[1] V_{CCO} is the supply voltage associated with the output port.

[2] V_{CCI} is the supply voltage associated with the data input port.

[3] For I/O ports, the parameter I_{OZ} includes the input leakage current.

© NXP B.V. 2009. All rights reserved.

Table 7. Static characteristics [1][2]

At recommended operating conditions; voltages are referenced to GND (ground = 0 V).

Symbol	Parameter	Conditions	–40 °C to +85 °C		–40 °C to +125 °C		Unit
			Min	Max	Min	Max	
V_{IH}	HIGH-level input voltage	data input					
		V_{CCI} = 0.8 V	$0.70V_{CCI}$	-	$0.70V_{CCI}$	-	V
		V_{CCI} = 1.1 V to 1.95 V	$0.65V_{CCI}$	-	$0.65V_{CCI}$	-	V
		V_{CCI} = 2.3 V to 2.7 V	1.6	-	1.6	-	V
		V_{CCI} = 3.0 V to 3.6 V	2	-	2	-	V
		nDIR, n$\overline{OE}$ input					
		$V_{CC(A)}$ = 0.8 V	$0.70V_{CC(A)}$	-	$0.70V_{CC(A)}$	-	V
		$V_{CC(A)}$ = 1.1 V to 1.95 V	$0.65V_{CC(A)}$	-	$0.65V_{CC(A)}$	-	V
		$V_{CC(A)}$ = 2.3 V to 2.7 V	1.6	-	1.6	-	V
		$V_{CC(A)}$ = 3.0 V to 3.6 V	2	-	2	-	V
V_{IL}	LOW-level input voltage	data input					
		V_{CCI} = 0.8 V	-	$0.30V_{CCI}$	-	$0.30V_{CCI}$	V
		V_{CCI} = 1.1 V to 1.95 V	-	$0.35V_{CCI}$	-	$0.35V_{CCI}$	V
		V_{CCI} = 2.3 V to 2.7 V	-	0.7	-	0.7	V
		V_{CCI} = 3.0 V to 3.6 V	-	0.8	-	0.8	V
		nDIR, n$\overline{OE}$ input					
		$V_{CC(A)}$ = 0.8 V	-	$0.30V_{CC(A)}$	-	$0.30V_{CC(A)}$	V
		$V_{CC(A)}$ = 1.1 V to 1.95 V	-	$0.35V_{CC(A)}$	-	$0.35V_{CC(A)}$	V
		$V_{CC(A)}$ = 2.3 V to 2.7 V	-	0.7	-	0.7	V
		$V_{CC(A)}$ = 3.0 V to 3.6 V	-	0.8	-	0.8	V
V_{OH}	HIGH-level output voltage	$V_I = V_{IH}$ or V_{IL}					
		I_O = –100 µA; $V_{CC(A)} = V_{CC(B)}$ = 0.8 V to 3.6 V	$V_{CCO} - 0.1$	-	$V_{CCO} - 0.1$	-	V
		I_O = –3 mA; $V_{CC(A)} = V_{CC(B)}$ = 1.1 V	0.85	-	0.85	-	V
		I_O = –6 mA; $V_{CC(A)} = V_{CC(B)}$ = 1.4 V	1.05	-	1.05	-	V
		I_O = –8 mA; $V_{CC(A)} = V_{CC(B)}$ = 1.65 V	1.2	-	1.2	-	V
		I_O = –9 mA; $V_{CC(A)} = V_{CC(B)}$ = 2.3 V	1.75	-	1.75	-	V
		I_O = –12 mA; $V_{CC(A)} = V_{CC(B)}$ = 3.0 V	2.3	-	2.3	-	V

© NXP B.V. 2009. All rights reserved.

Table 7. Static characteristics *...continued*[1][2]

At recommended operating conditions; voltages are referenced to GND (ground = 0 V).

Symbol	Parameter	Conditions	–40 °C to +85 °C		–40 °C to +125 °C		Unit
			Min	Max	Min	Max	
V_{OL}	LOW-level output voltage	$V_I = V_{IH}$ or V_{IL}					
		I_O = 100 µA; $V_{CC(A)} = V_{CC(B)}$ = 0.8 V to 3.6 V	-	0.1	-	0.1	V
		I_O = 3 mA; $V_{CC(A)} = V_{CC(B)}$ = 1.1 V	-	0.25	-	0.25	V
		I_O = 6 mA; $V_{CC(A)} = V_{CC(B)}$ = 1.4 V	-	0.35	-	0.35	V
		I_O = 8 mA; $V_{CC(A)} = V_{CC(B)}$ = 1.65 V	-	0.45	-	0.45	V
		I_O = 9 mA; $V_{CC(A)} = V_{CC(B)}$ = 2.3 V	-	0.55	-	0.55	V
		I_O = 12 mA; $V_{CC(A)} = V_{CC(B)}$ = 3.0 V	-	0.7	-	0.7	V
I_I	input leakage current	nDIR, $n\overline{OE}$ input; V_I = 0 V or 3.6 V; $V_{CC(A)} = V_{CC(B)}$ = 0.8 V to 3.6 V	-	±1	-	±5	µA
I_{OZ}	OFF-state output current	A or B port; V_O = 0 V or V_{CCO}; $V_{CC(A)} = V_{CC(B)}$ = 3.6 V [3]	-	±5	-	±30	µA
		suspend mode A port; V_O = 0 V or V_{CCO}; $V_{CC(A)}$ = 3.6 V; $V_{CC(B)}$ = 0 V [3]	-	±5	-	±30	µA
		suspend mode B port; V_O = 0 V or V_{CCO}; $V_{CC(A)}$ = 0 V; $V_{CC(B)}$ = 3.6 V [3]	-	±5	-	±30	µA
I_{OFF}	power-off leakage current	A port; V_I or V_O = 0 V to 3.6 V; $V_{CC(A)}$ = 0 V; $V_{CC(B)}$ = 0.8 V to 3.6 V	-	±5	-	±30	µA
		B port; V_I or V_O = 0 V to 3.6 V; $V_{CC(B)}$ = 0 V; $V_{CC(A)}$ = 0.8 V to 3.6 V	-	±5	-	±30	µA

© NXP B.V. 2009. All rights reserved.

Table 7. Static characteristics *...continued*[1][2]

At recommended operating conditions; voltages are referenced to GND (ground = 0 V).

Symbol	Parameter	Conditions	–40 °C to +85 °C		–40 °C to +125 °C		Unit
			Min	Max	Min	Max	
I_{CC}	supply current	A port; V_I = 0 V or V_{CCI}; I_O = 0 A					
		$V_{CC(A)}$ = 0.8 V to 3.6 V; $V_{CC(B)}$ = 0.8 V to 3.6 V	-	10	-	55	µA
		$V_{CC(A)}$ = 1.1 V to 3.6 V; $V_{CC(B)}$ = 1.1 V to 3.6 V	-	8	-	50	µA
		$V_{CC(A)}$ = 3.6 V; $V_{CC(B)}$ = 0 V	-	8	-	50	µA
		$V_{CC(A)}$ = 0 V; $V_{CC(B)}$ = 3.6 V	–2	-	–12	-	µA
		B port; V_I = 0 V or V_{CCI}; I_O = 0 A					
		$V_{CC(A)}$ = 0.8 V to 3.6 V; $V_{CC(B)}$ = 0.8 V to 3.6 V	-	10	-	55	µA
		$V_{CC(A)}$ = 1.1 V to 3.6 V; $V_{CC(B)}$ = 1.1 V to 3.6 V	-	8	-	50	µA
		$V_{CC(A)}$ = 3.6 V; $V_{CC(B)}$ = 0 V	–2	-	–12	-	µA
		$V_{CC(A)}$ = 0 V; $V_{CC(B)}$ = 3.6 V	-	8	-	50	µA
		A plus B port ($I_{CC(A)}$ + $I_{CC(B)}$); I_O = 0 A; V_I = 0 V or V_{CCI}; $V_{CC(A)}$ = 0.8 V to 3.6 V; $V_{CC(B)}$ = 0.8 V to 3.6 V	-	20	-	70	µA
		A plus B port ($I_{CC(A)}$ + $I_{CC(B)}$); I_O = 0 A; V_I = 0 V or V_{CCI}; $V_{CC(A)}$ = 1.1 V to 3.6 V; $V_{CC(B)}$ = 1.1 V to 3.6 V	-	16	-	65	µA

[1] V_{CCO} is the supply voltage associated with the output port.

[2] V_{CCI} is the supply voltage associated with the data input port.

[3] For I/O ports, the parameter I_{OZ} includes the input leakage current.

Table 8. Typical total supply current ($I_{CC(A)}$ + $I_{CC(B)}$)

$V_{CC(A)}$	$V_{CC(B)}$							Unit
	0 V	0.8 V	1.2 V	1.5 V	1.8 V	2.5 V	3.3 V	
0 V	0	0.1	0.1	0.1	0.1	0.1	0.1	µA
0.8 V	0.1	0.1	0.1	0.1	0.1	0.3	1.6	µA
1.2 V	0.1	0.1	0.1	0.1	0.1	0.1	0.8	µA
1.5 V	0.1	0.1	0.1	0.1	0.1	0.1	0.4	µA
1.8 V	0.1	0.1	0.1	0.1	0.1	0.1	0.2	µA
2.5 V	0.1	0.3	0.1	0.1	0.1	0.1	0.1	µA
3.3 V	0.1	1.6	0.8	0.4	0.2	0.1	0.1	µA

© NXP B.V. 2009. All rights reserved.

10. Dynamic characteristics

Table 9. Typical power dissipation capacitance at $V_{CC(A)} = V_{CC(B)}$ and T_{amb} = 25 °C [1][2]

Voltages are referenced to GND (ground = 0 V).

Symbol	Parameter	Conditions	$V_{CC(A)} = V_{CC(B)}$						Unit
			0.8 V	1.2 V	1.5 V	1.8 V	2.5 V	3.3 V	
C_{PD}	power dissipation capacitance	A port: (direction nAn to nBn); output enabled	0.2	0.2	0.2	0.2	0.3	0.4	pF
		A port: (direction nAn to nBn); output disabled	0.2	0.2	0.2	0.2	0.3	0.4	pF
		A port: (direction nBn to nAn); output enabled	9.5	9.7	9.8	9.9	10.7	11.9	pF
		A port: (direction nBn to nAn); output disabled	0.6	0.6	0.6	0.6	0.7	0.7	pF
		B port: (direction nAn to nBn); output enabled	9.5	9.7	9.8	9.9	10.7	11.9	pF
		B port: (direction nAn to nBn); output disabled	0.6	0.6	0.6	0.6	0.7	0.7	pF
		B port: (direction nBn to nAn); output enabled	0.2	0.2	0.2	0.2	0.3	0.4	pF
		B port: (direction nBn to nAn); output disabled	0.2	0.2	0.2	0.2	0.3	0.4	pF

[1] C_{PD} is used to determine the dynamic power dissipation (P_D in μW).
$P_D = C_{PD} \times V_{CC}^2 \times f_i \times N + \Sigma(C_L \times V_{CC}^2 \times f_o)$ where:
f_i = input frequency in MHz;
f_o = output frequency in MHz;
C_L = load capacitance in pF;
V_{CC} = supply voltage in V;
N = number of inputs switching;
$\Sigma(C_L \times V_{CC}^2 \times f_o)$ = sum of the outputs.

[2] f_i = 10 MHz; V_I = GND to V_{CC}; $t_r = t_f$ = 1 ns; C_L = 0 pF; $R_L = \infty\ \Omega$.

© NXP B.V. 2009. All rights reserved.

Table 10. Typical dynamic characteristics at $V_{CC(A)}$ = 0.8 V and T_{amb} = 25 °C [1]

Voltages are referenced to GND (ground = 0 V); for test circuit see Figure 8; for wave forms see Figure 6 and Figure 7

Symbol	Parameter	Conditions	$V_{CC(B)}$						Unit
			0.8 V	1.2 V	1.5 V	1.8 V	2.5 V	3.3 V	
t_{pd}	propagation delay	nAn to nBn	14.5	7.3	6.5	6.2	5.9	6.0	ns
		nBn to nAn	14.5	12.7	12.4	12.3	12.1	12.0	ns
t_{dis}	disable time	$n\overline{OE}$ to nAn	14.3	14.3	14.3	14.3	14.3	14.3	ns
		$n\overline{OE}$ to nBn	17.0	9.9	9.0	9.4	9.0	9.7	ns
t_{en}	enable time	$n\overline{OE}$ to nAn	18.2	18.2	18.2	18.2	18.2	18.2	ns
		$n\overline{OE}$ to nBn	19.2	10.7	9.8	9.6	9.7	10.2	ns

[1] t_{pd} is the same as t_{PLH} and t_{PHL}; t_{dis} is the same as t_{PLZ} and t_{PHZ}; t_{en} is the same as t_{PZL} and t_{PZH}.

Table 11. Typical dynamic characteristics at $V_{CC(B)}$ = 0.8 V and T_{amb} = 25 °C [1]

Voltages are referenced to GND (ground = 0 V); for test circuit see Figure 8; for wave forms see Figure 6 and Figure 7

Symbol	Parameter	Conditions	$V_{CC(A)}$						Unit
			0.8 V	1.2 V	1.5 V	1.8 V	2.5 V	3.3 V	
t_{pd}	propagation delay	nAn to nBn	14.5	12.7	12.4	12.3	12.1	12.0	ns
		nBn to nAn	14.5	7.3	6.5	6.2	5.9	6.0	ns
t_{dis}	disable time	$n\overline{OE}$ to nAn	14.3	5.5	4.1	4.0	3.0	3.5	ns
		$n\overline{OE}$ to nBn	17.0	13.8	13.4	13.1	12.9	12.7	ns
t_{en}	enable time	$n\overline{OE}$ to nAn	18.2	5.6	4.0	3.2	2.4	2.2	ns
		$n\overline{OE}$ to nBn	19.2	14.6	14.1	13.9	13.7	13.6	ns

[1] t_{pd} is the same as t_{PLH} and t_{PHL}; t_{dis} is the same as t_{PLZ} and t_{PHZ}; t_{en} is the same as t_{PZL} and t_{PZH}.

© NXP B.V. 2009. All rights reserved.

Table 12. Dynamic characteristics for temperature range −40 °C to +85 °C [1]

Voltages are referenced to GND (ground = 0 V); for test circuit see Figure 8; for wave forms see Figure 6 and Figure 7.

Symbol	Parameter	Conditions	$V_{CC(B)}$										Unit
			1.2 V ± 0.1 V		1.5 V ± 0.1 V		1.8 V ± 0.15 V		2.5 V ± 0.2 V		3.3 V ± 0.3 V		
			Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	
$V_{CC(A)}$ = 1.1 V to 1.3 V													
t_{pd}	propagation delay	nAn to nBn	0.5	9.4	0.5	7.1	0.5	6.2	0.5	5.2	0.5	5.1	ns
		nBn to nAn	0.5	9.4	0.5	8.9	0.5	8.7	0.5	8.4	0.5	8.2	ns
t_{dis}	disable time	$n\overline{OE}$ to nAn	1.8	10.9	1.8	10.9	1.8	10.9	1.8	10.9	1.8	10.9	ns
		$n\overline{OE}$ to nBn	1.9	12.4	1.9	9.6	1.9	9.5	1.4	8.1	1.2	9.1	ns
t_{en}	enable time	$n\overline{OE}$ to nAn	1.4	12.8	1.4	12.8	1.4	12.8	1.4	12.8	1.4	12.8	ns
		$n\overline{OE}$ to nBn	1.1	13.3	1.1	10.0	1.1	8.9	1.0	7.9	1.0	7.7	ns
$V_{CC(A)}$ = 1.4 V to 1.6 V													
t_{pd}	propagation delay	nAn to nBn	0.3	8.9	0.3	6.3	0.3	5.2	0.3	4.2	0.3	4.2	ns
		nBn to nAn	0.7	7.1	0.7	6.3	0.5	6.0	0.4	5.7	0.3	5.6	ns
t_{dis}	disable time	$n\overline{OE}$ to nAn	1.8	10.2	1.8	10.2	1.5	10.2	1.3	10.2	1.6	10.2	ns
		$n\overline{OE}$ to nBn	1.9	11.3	1.9	10.3	1.9	9.1	1.4	7.4	1.2	7.6	ns
t_{en}	enable time	$n\overline{OE}$ to nAn	1.1	9.4	1.4	9.4	1.1	9.4	0.7	9.4	0.4	9.4	ns
		$n\overline{OE}$ to nBn	1.4	12.1	1.4	9.6	1.1	7.7	0.9	5.8	0.9	5.6	ns
$V_{CC(A)}$ = 1.65 V to 1.95 V													
t_{pd}	propagation delay	nAn to nBn	0.1	8.7	0.1	6.0	0.1	4.9	0.1	3.9	0.3	3.9	ns
		nBn to nAn	0.6	6.2	0.6	5.3	0.5	4.9	0.3	4.6	0.3	4.5	ns
t_{dis}	disable time	$n\overline{OE}$ to nAn	1.8	8.6	1.6	8.6	1.8	8.6	1.3	8.6	1.6	8.6	ns
		$n\overline{OE}$ to nBn	1.7	10.9	1.7	9.9	1.6	8.7	1.2	6.9	1.0	6.9	ns
t_{en}	enable time	$n\overline{OE}$ to nAn	1.0	7.2	1.0	7.2	1.0	7.2	0.6	7.2	0.4	7.2	ns
		$n\overline{OE}$ to nBn	1.2	11.7	1.2	9.2	1.0	7.4	0.8	5.3	0.8	4.6	ns
$V_{CC(A)}$ = 2.3 V to 2.7 V													
t_{pd}	propagation delay	nAn to nBn	0.1	8.4	0.1	5.7	0.1	4.6	0.2	3.5	0.1	3.6	ns
		nBn to nAn	0.6	5.2	0.6	4.2	0.4	3.9	0.2	3.4	0.2	3.3	ns
t_{dis}	disable time	$n\overline{OE}$ to nAn	1.0	6.2	1.0	6.2	1.0	6.2	1.0	6.2	1.0	6.2	ns
		$n\overline{OE}$ to nBn	1.5	10.4	1.5	8.8	1.3	8.2	1.1	6.2	0.9	5.2	ns
t_{en}	enable time	$n\overline{OE}$ to nAn	0.7	4.8	0.7	4.8	0.7	4.8	0.6	4.8	0.4	4.8	ns
		$n\overline{OE}$ to nBn	0.9	11.3	0.9	8.8	0.8	7.0	0.6	4.8	0.6	4.0	ns
$V_{CC(A)}$ = 3.0 V to 3.6 V													
t_{pd}	propagation delay	nAn to nBn	0.1	8.2	0.1	5.6	0.1	4.5	0.1	3.3	0.1	2.9	ns
		nBn to nAn	0.6	5.1	0.6	4.2	0.4	3.4	0.2	3.0	0.1	2.8	ns
t_{dis}	disable time	$n\overline{OE}$ to nAn	0.7	5.6	0.7	5.6	0.7	5.6	0.7	5.6	0.7	5.6	ns
		$n\overline{OE}$ to nBn	1.4	10.2	1.4	9.3	1.2	8.1	1.0	6.4	0.8	6.2	ns
t_{en}	enable time	$n\overline{OE}$ to nAn	0.6	3.8	0.6	3.8	0.6	3.8	0.6	3.8	0.4	3.8	ns
		$n\overline{OE}$ to nBn	0.8	11.3	0.8	8.7	0.6	6.8	0.5	4.7	0.5	3.8	ns

[1] t_{pd} is the same as t_{PLH} and t_{PHL}; t_{dis} is the same as t_{PLZ} and t_{PHZ}; t_{en} is the same as t_{PZL} and t_{PZH}.

© NXP B.V. 2009. All rights reserved.

Table 13. Dynamic characteristics for temperature range −40 °C to +125 °C [1]

Voltages are referenced to GND (ground = 0 V); for test circuit see Figure 8; for wave forms see Figure 6 and Figure 7

Symbol	Parameter	Conditions	$V_{CC(B)}$										Unit
			1.2 V ± 0.1 V		1.5 V ± 0.1 V		1.8 V ± 0.15 V		2.5 V ± 0.2 V		3.3 V ± 0.3 V		
			Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	
$V_{CC(A)}$ = 1.1 V to 1.3 V													
t_{pd}	propagation delay	nAn to nBn	0.5	10.4	0.5	7.9	0.5	6.9	0.5	5.8	0.5	5.7	ns
		nBn to nAn	0.5	10.4	0.5	9.8	0.5	9.6	0.5	9.3	0.5	9.1	ns
t_{dis}	disable time	$n\overline{OE}$ to nAn	1.8	12.0	1.8	12.0	1.8	12.0	1.8	12.0	1.8	12.0	ns
		$n\overline{OE}$ to nBn	1.9	13.7	1.9	10.6	1.9	10.5	1.4	9.0	1.2	10.1	ns
t_{en}	enable time	$n\overline{OE}$ to nAn	1.4	14.1	1.4	14.1	1.4	14.1	1.4	14.1	1.4	14.1	ns
		$n\overline{OE}$ to nBn	1.1	14.7	1.1	11.0	1.1	9.8	1.0	8.7	1.0	8.5	ns
$V_{CC(A)}$ = 1.4 V to 1.6 V													
t_{pd}	propagation delay	nAn to nBn	0.3	9.8	0.3	7.0	0.3	5.8	0.3	4.7	0.3	4.7	ns
		nBn to nAn	0.7	7.9	0.7	7.0	0.5	6.6	0.4	6.3	0.3	6.2	ns
t_{dis}	disable time	$n\overline{OE}$ to nAn	1.8	11.3	1.8	11.3	1.5	11.3	1.3	11.3	1.6	11.3	ns
		$n\overline{OE}$ to nBn	1.9	12.5	1.9	11.4	1.9	10.1	1.4	8.2	1.2	8.4	ns
t_{en}	enable time	$n\overline{OE}$ to nAn	1.1	10.4	1.4	10.4	1.1	10.4	0.7	10.4	0.4	10.4	ns
		$n\overline{OE}$ to nBn	1.4	13.3	1.4	10.6	1.1	8.5	0.9	6.4	0.9	6.2	ns
$V_{CC(A)}$ = 1.65 V to 1.95 V													
t_{pd}	propagation delay	nAn to nBn	0.1	9.6	0.1	6.6	0.1	5.4	0.1	4.3	0.3	4.3	ns
		nBn to nAn	0.6	6.9	0.6	5.9	0.5	5.4	0.3	5.1	0.3	5.0	ns
t_{dis}	disable time	$n\overline{OE}$ to nAn	1.8	9.5	1.6	9.5	1.8	9.5	1.3	9.5	1.6	9.5	ns
		$n\overline{OE}$ to nBn	1.7	12.0	1.7	10.9	1.6	9.6	1.2	7.6	1.0	7.6	ns
t_{en}	enable time	$n\overline{OE}$ to nAn	1.0	8.0	1.0	8.0	1.0	8.0	0.6	8.0	0.4	8.0	ns
		$n\overline{OE}$ to nBn	1.2	12.9	1.2	10.2	1.0	8.2	0.8	5.9	0.8	5.1	ns
$V_{CC(A)}$ = 2.3 V to 2.7 V													
t_{pd}	propagation delay	nAn to nBn	0.1	9.3	0.1	6.3	0.1	5.1	0.2	4.0	0.1	4.0	ns
		nBn to nAn	0.6	5.8	0.6	4.7	0.4	4.3	0.2	3.9	0.2	3.8	ns
t_{dis}	disable time	$n\overline{OE}$ to nAn	1.0	6.9	1.0	6.9	1.0	6.9	1.0	6.9	1.0	6.9	ns
		$n\overline{OE}$ to nBn	1.5	11.5	1.5	10.4	1.3	9.1	1.1	6.9	0.9	5.8	ns
t_{en}	enable time	$n\overline{OE}$ to nAn	0.7	5.3	0.7	5.3	0.7	5.3	0.6	5.3	0.4	5.3	ns
		$n\overline{OE}$ to nBn	0.9	12.4	0.9	9.7	0.8	7.7	0.6	5.3	0.6	4.4	ns
$V_{CC(A)}$ = 3.0 V to 3.6 V													
t_{pd}	propagation delay	nAn to nBn	0.1	9.1	0.1	6.2	0.1	5.0	0.1	3.8	0.1	3.3	ns
		nBn to nAn	0.6	5.7	0.6	4.7	0.4	3.9	0.2	3.4	0.1	3.3	ns
t_{dis}	disable time	$n\overline{OE}$ to nAn	0.7	6.2	0.7	6.2	0.7	6.2	0.7	6.2	0.7	6.2	ns
		$n\overline{OE}$ to nBn	1.4	11.3	1.4	10.3	1.2	9.0	1.0	7.1	0.8	6.9	ns
t_{en}	enable time	$n\overline{OE}$ to nAn	0.6	4.2	0.6	4.2	0.6	4.2	0.6	4.2	0.4	4.2	ns
		$n\overline{OE}$ to nBn	0.8	12.4	0.8	9.6	0.6	7.5	0.5	5.2	0.5	4.2	ns

[1] t_{pd} is the same as t_{PLH} and t_{PHL}; t_{dis} is the same as t_{PLZ} and t_{PHZ}; t_{en} is the same as t_{PZL} and t_{PZH}.

© NXP B.V. 2009. All rights reserved.

11. Waveforms

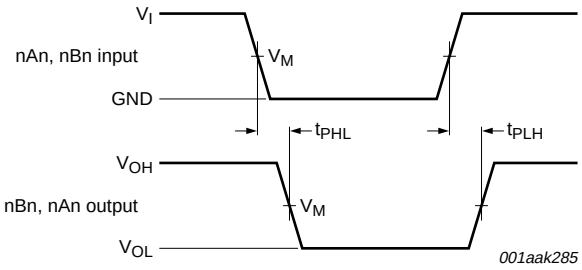

Measurement points are given in Table 14.

V_{OL} and V_{OH} are typical output voltage levels that occur with the output load.

Fig 6. The data input (nAn, nBn) to output (nBn, nAn) propagation delay times

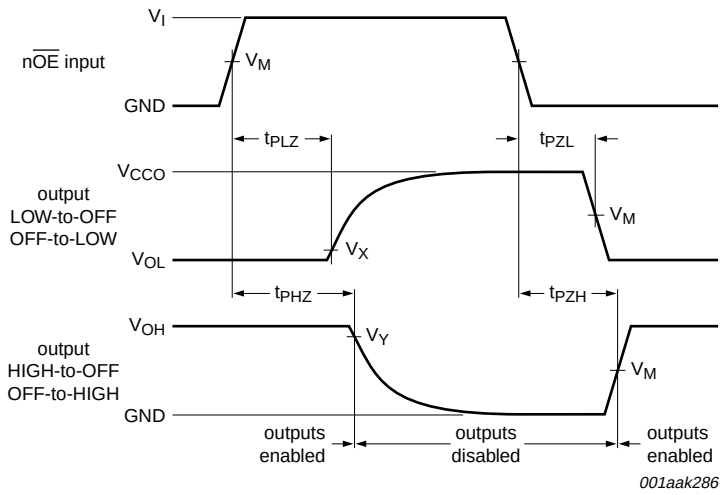

Measurement points are given in Table 14.

V_{OL} and V_{OH} are typical output voltage levels that occur with the output load.

Fig 7. Enable and disable times

Table 14. Measurement points

Supply voltage	Input[1]	Output[2]		
$V_{CC(A)}$, $V_{CC(B)}$	V_M	V_M	V_X	V_Y
0.8 V to 1.6 V	$0.5V_{CCI}$	$0.5V_{CCO}$	V_{OL} + 0.1 V	V_{OH} − 0.1 V
1.65 V to 2.7 V	$0.5V_{CCI}$	$0.5V_{CCO}$	V_{OL} + 0.15 V	V_{OH} − 0.15 V
3.0 V to 3.6 V	$0.5V_{CCI}$	$0.5V_{CCO}$	V_{OL} + 0.3 V	V_{OH} − 0.3 V

[1] V_{CCI} is the supply voltage associated with the data input port.

[2] V_{CCO} is the supply voltage associated with the output port.

© NXP B.V. 2009. All rights reserved.

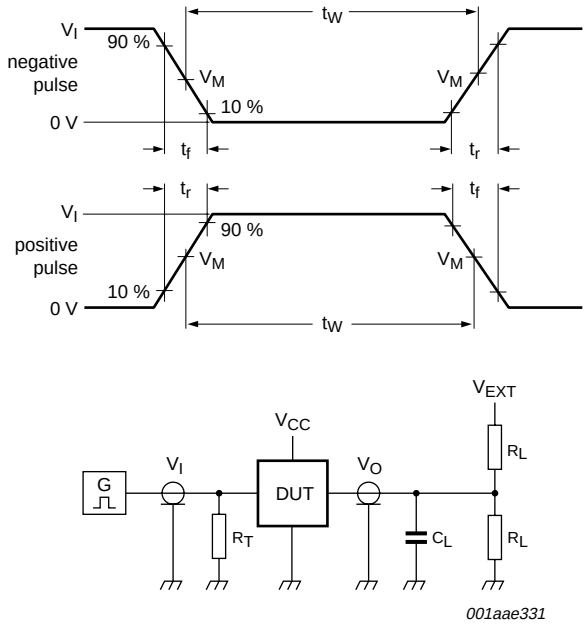

Test data is given in Table 15.

R_L = Load resistance.

C_L = Load capacitance including jig and probe capacitance.

R_T = Termination resistance.

V_{EXT} = External voltage for measuring switching times.

Fig 8. Load circuit for switching times

Table 15. Test data

Supply voltage	Input		Load		V_{EXT}		
$V_{CC(A)}$, $V_{CC(B)}$	V_I[1]	$\Delta t/\Delta V$[2]	C_L	R_L	t_{PLH}, t_{PHL}	t_{PZH}, t_{PHZ}	t_{PZL}, t_{PLZ}[3]
0.8 V to 1.6 V	V_{CCI}	≤ 1.0 ns/V	15 pF	2 kΩ	open	GND	$2V_{CCO}$
1.65 V to 2.7 V	V_{CCI}	≤ 1.0 ns/V	15 pF	2 kΩ	open	GND	$2V_{CCO}$
3.0 V to 3.6 V	V_{CCI}	≤ 1.0 ns/V	15 pF	2 kΩ	open	GND	$2V_{CCO}$

[1] V_{CCI} is the supply voltage associated with the data input port.

[2] dV/dt ≥ 1.0 V/ns

[3] V_{CCO} is the supply voltage associated with the output port.

© NXP B.V. 2009. All rights reserved.

12. Typical propagation delay characteristics

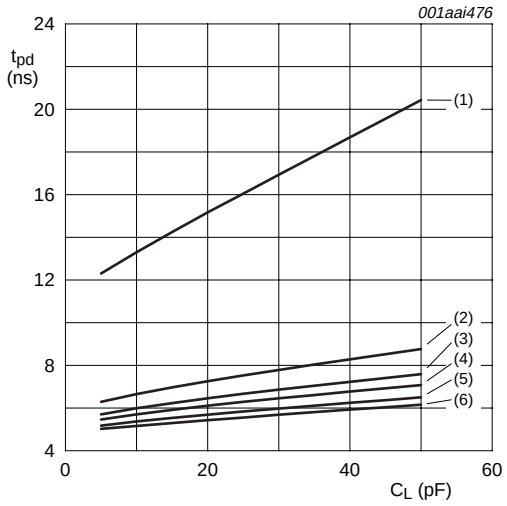

a. Propagation delay (A to B); $V_{CC(A)}$ = 0.8 V

(1) $V_{CC(B)}$ = 0.8 V.
(2) $V_{CC(B)}$ = 1.2 V.
(3) $V_{CC(B)}$ = 1.5 V.
(4) $V_{CC(B)}$ = 1.8 V.
(5) $V_{CC(B)}$ = 2.5 V.
(6) $V_{CC(B)}$ = 3.3 V.

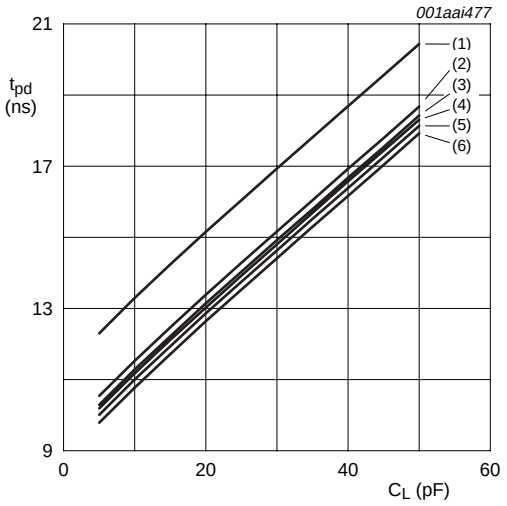

b. Propagation delay (A to B); $V_{CC(B)}$ = 0.8 V

(1) $V_{CC(A)}$ = 0.8 V.
(2) $V_{CC(A)}$ = 1.2 V.
(3) $V_{CC(A)}$ = 1.5 V.
(4) $V_{CC(A)}$ = 1.8 V.
(5) $V_{CC(A)}$ = 2.5 V.
(6) $V_{CC(A)}$ = 3.3 V.

Fig 9. Typical propagation delay versus load capacitance; T_{amb} = 25 °C

© NXP B.V. 2009. All rights reserved.

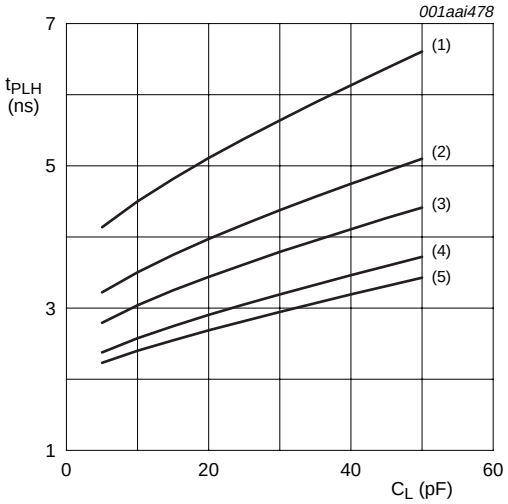

a. LOW to HIGH propagation delay (A to B); $V_{CC(A)}$ = 1.2 V

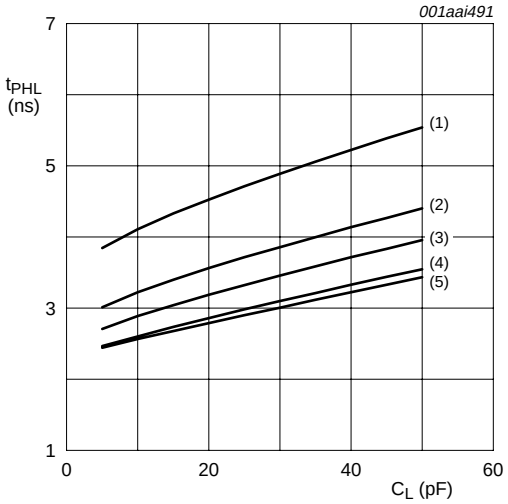

b. HIGH to LOW propagation delay (A to B); $V_{CC(A)}$ = 1.2 V

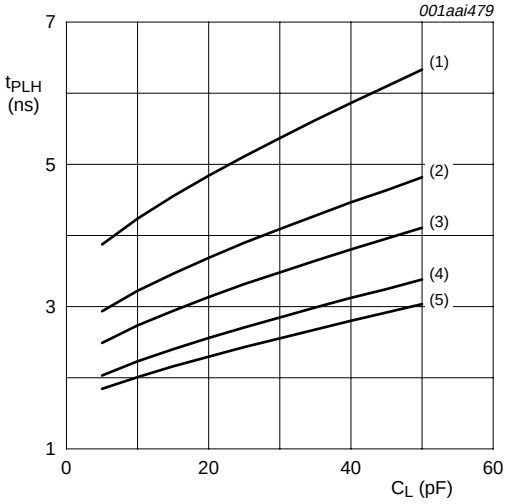

c. LOW to HIGH propagation delay (A to B); $V_{CC(A)}$ = 1.5 V

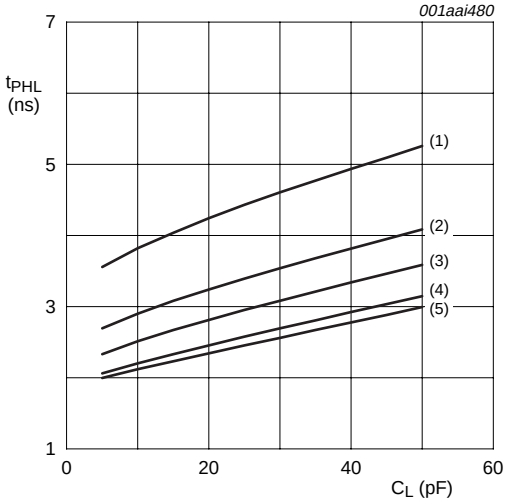

d. HIGH to LOW propagation delay (A to B); $V_{CC(A)}$ = 1.5 V

(1) $V_{CC(B)}$ = 1.2 V.

(2) $V_{CC(B)}$ = 1.5 V.

(3) $V_{CC(B)}$ = 1.8 V.

(4) $V_{CC(B)}$ = 2.5 V.

(5) $V_{CC(B)}$ = 3.3 V.

Fig 10. Typical propagation delay versus load capacitance; T_{amb} = 25 °C

© NXP B.V. 2009. All rights reserved.

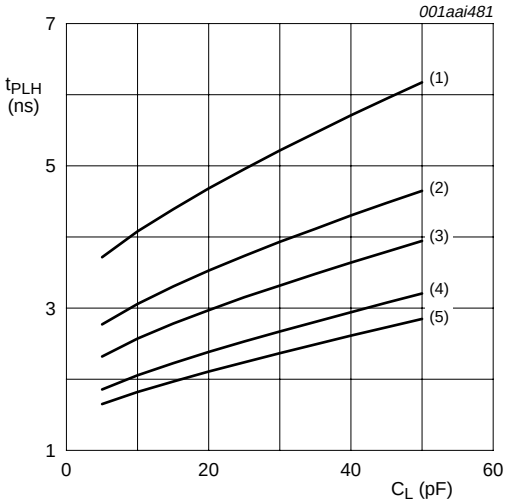

a. LOW to HIGH propagation delay (A to B); $V_{CC(A)}$ = 1.8 V

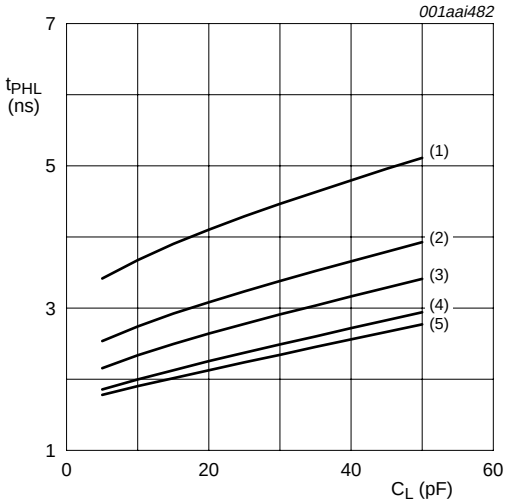

b. HIGH to LOW propagation delay (A to B); $V_{CC(A)}$ = 1.8 V

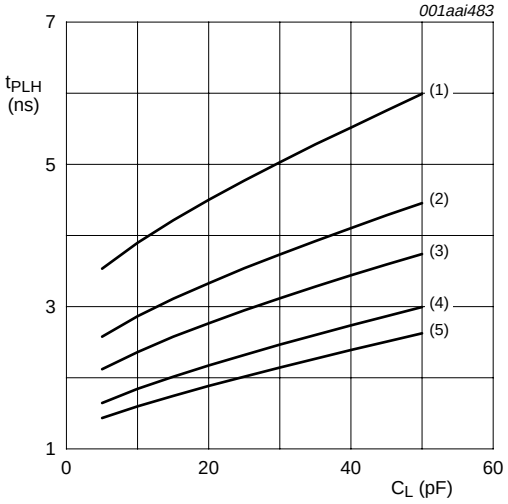

c. LOW to HIGH propagation delay (A to B); $V_{CC(A)}$ = 2.5 V

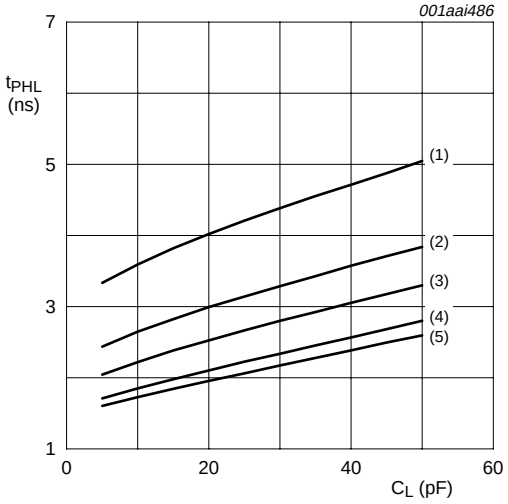

d. HIGH to LOW propagation delay (A to B); $V_{CC(A)}$ = 2.5 V

(1) $V_{CC(B)}$ = 1.2 V.

(2) $V_{CC(B)}$ = 1.5 V.

(3) $V_{CC(B)}$ = 1.8 V.

(4) $V_{CC(B)}$ = 2.5 V.

(5) $V_{CC(B)}$ = 3.3 V.

Fig 11. Typical propagation delay versus load capacitance; T_{amb} = 25 °C

© NXP B.V. 2009. All rights reserved.

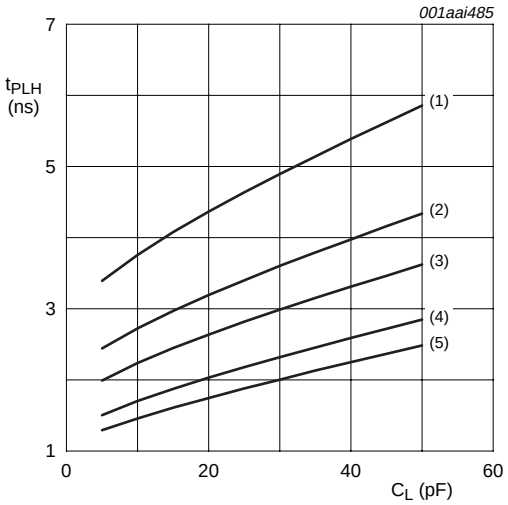

a. LOW to HIGH propagation delay (A to B); $V_{CC(A)}$ = 3.3 V

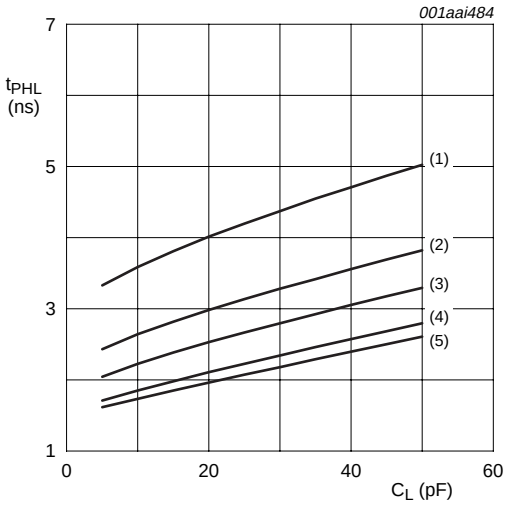

b. HIGH to LOW propagation delay (A to B); $V_{CC(A)}$ = 3.3 V

(1) $V_{CC(B)}$ = 1.2 V.
(2) $V_{CC(B)}$ = 1.5 V.
(3) $V_{CC(B)}$ = 1.8 V.
(4) $V_{CC(B)}$ = 2.5 V.
(5) $V_{CC(B)}$ = 3.3 V.

Fig 12. Typical propagation delay versus load capacitance; T_{amb} = 25 °C

© NXP B.V. 2009. All rights reserved.

13. Package outline

SO16: plastic small outline package; 16 leads; body width 3.9 mm **SOT109-1**

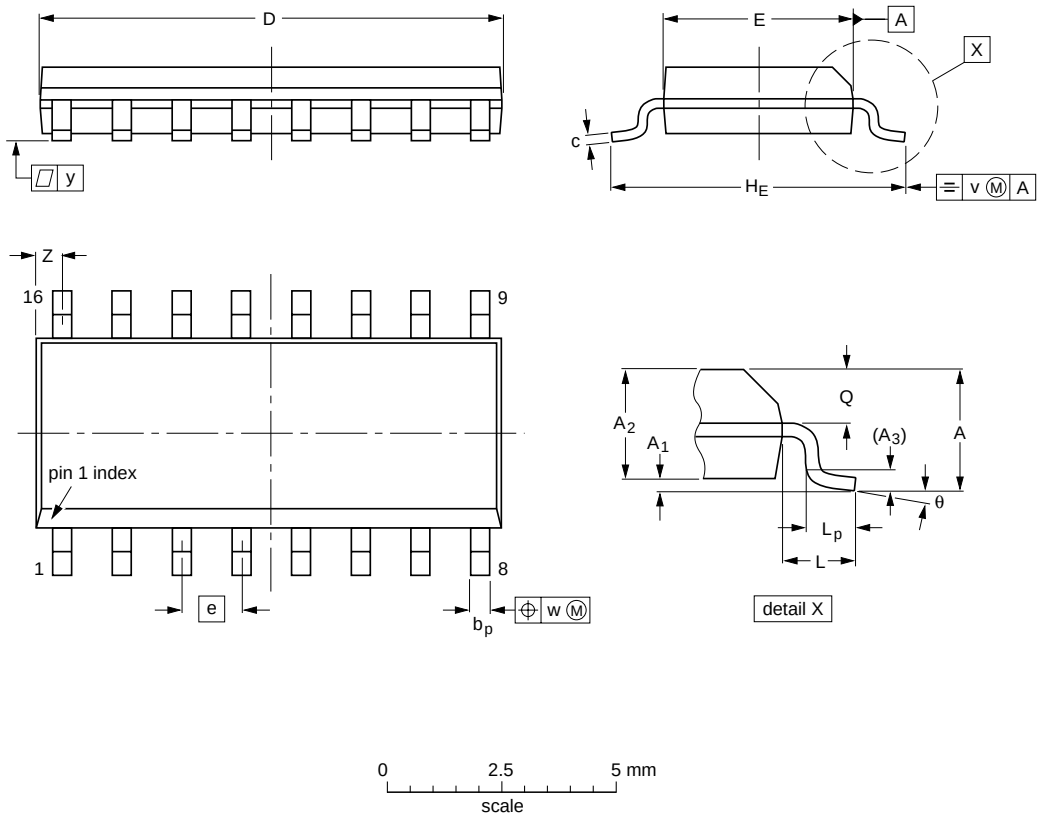

DIMENSIONS (inch dimensions are derived from the original mm dimensions)

UNIT	A max.	A_1	A_2	A_3	b_p	c	$D^{(1)}$	$E^{(1)}$	e	H_E	L	L_p	Q	v	w	y	$Z^{(1)}$	θ
mm	1.75	0.25 0.10	1.45 1.25	0.25	0.49 0.36	0.25 0.19	10.0 9.8	4.0 3.8	1.27	6.2 5.8	1.05	1.0 0.4	0.7 0.6	0.25	0.25	0.1	0.7 0.3	8^o 0^o
inches	0.069	0.010 0.004	0.057 0.049	0.01	0.019 0.014	0.0100 0.0075	0.39 0.38	0.16 0.15	0.05	0.244 0.228	0.041	0.039 0.016	0.028 0.020	0.01	0.01	0.004	0.028 0.012	

Note

1. Plastic or metal protrusions of 0.15 mm (0.006 inch) maximum per side are not included.

OUTLINE VERSION	REFERENCES				EUROPEAN PROJECTION	ISSUE DATE
	IEC	JEDEC	JEITA			
SOT109-1	076E07	MS-012				~~99-12-27~~ 03-02-19

Fig 13. Package outline SOT109-1 (SO16)

© NXP B.V. 2009. All rights reserved.

TSSOP16: plastic thin shrink small outline package; 16 leads; body width 4.4 mm **SOT403-1**

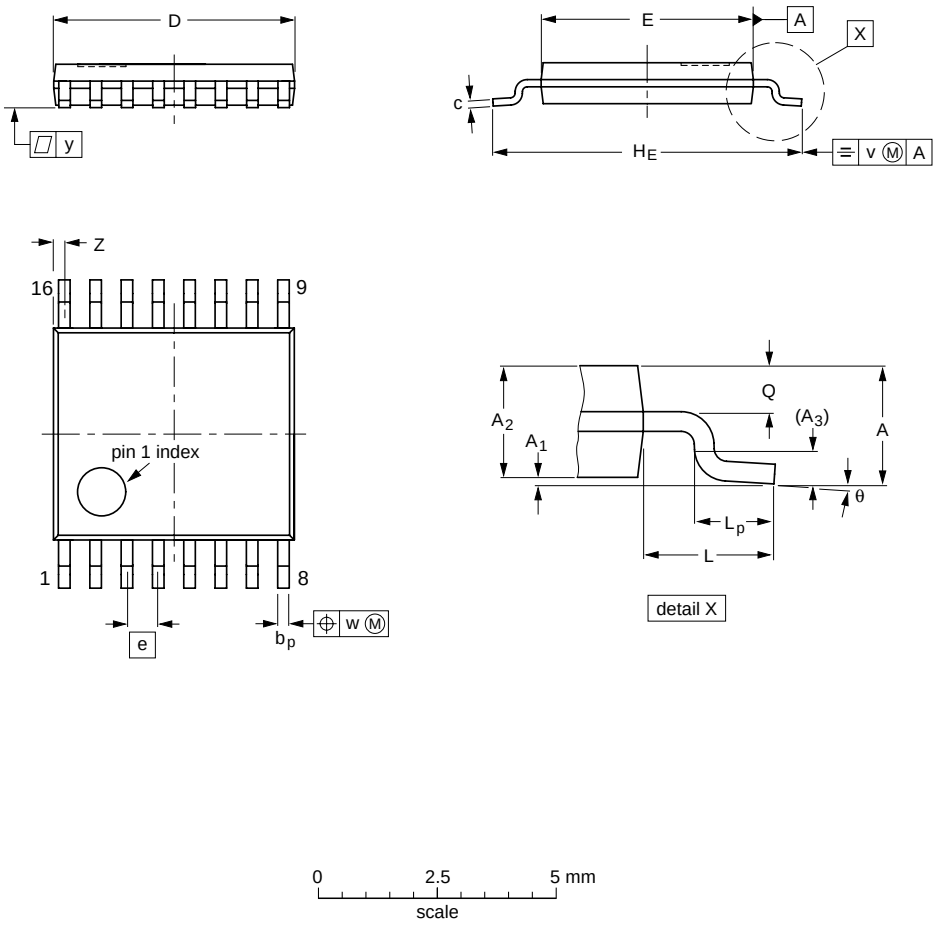

DIMENSIONS (mm are the original dimensions)

UNIT	A max.	A_1	A_2	A_3	b_p	c	D (1)	E (2)	e	H_E	L	L_p	Q	v	w	y	Z (1)	θ
mm	1.1	0.15 0.05	0.95 0.80	0.25	0.30 0.19	0.2 0.1	5.1 4.9	4.5 4.3	0.65	6.6 6.2	1	0.75 0.50	0.4 0.3	0.2	0.13	0.1	0.40 0.06	8^o 0^o

Notes

1. Plastic or metal protrusions of 0.15 mm maximum per side are not included.
2. Plastic interlead protrusions of 0.25 mm maximum per side are not included.

OUTLINE VERSION	REFERENCES				EUROPEAN PROJECTION	ISSUE DATE
	IEC	JEDEC	JEITA			
SOT403-1		MO-153				~~99-12-27~~ 03-02-18

Fig 14. Package outline SOT403-1 (TSSOP16)

© NXP B.V. 2009. All rights reserved.

DHVQFN16: plastic dual in-line compatible thermal enhanced very thin quad flat package; no leads; 16 terminals; body 2.5 x 3.5 x 0.85 mm **SOT763-1**

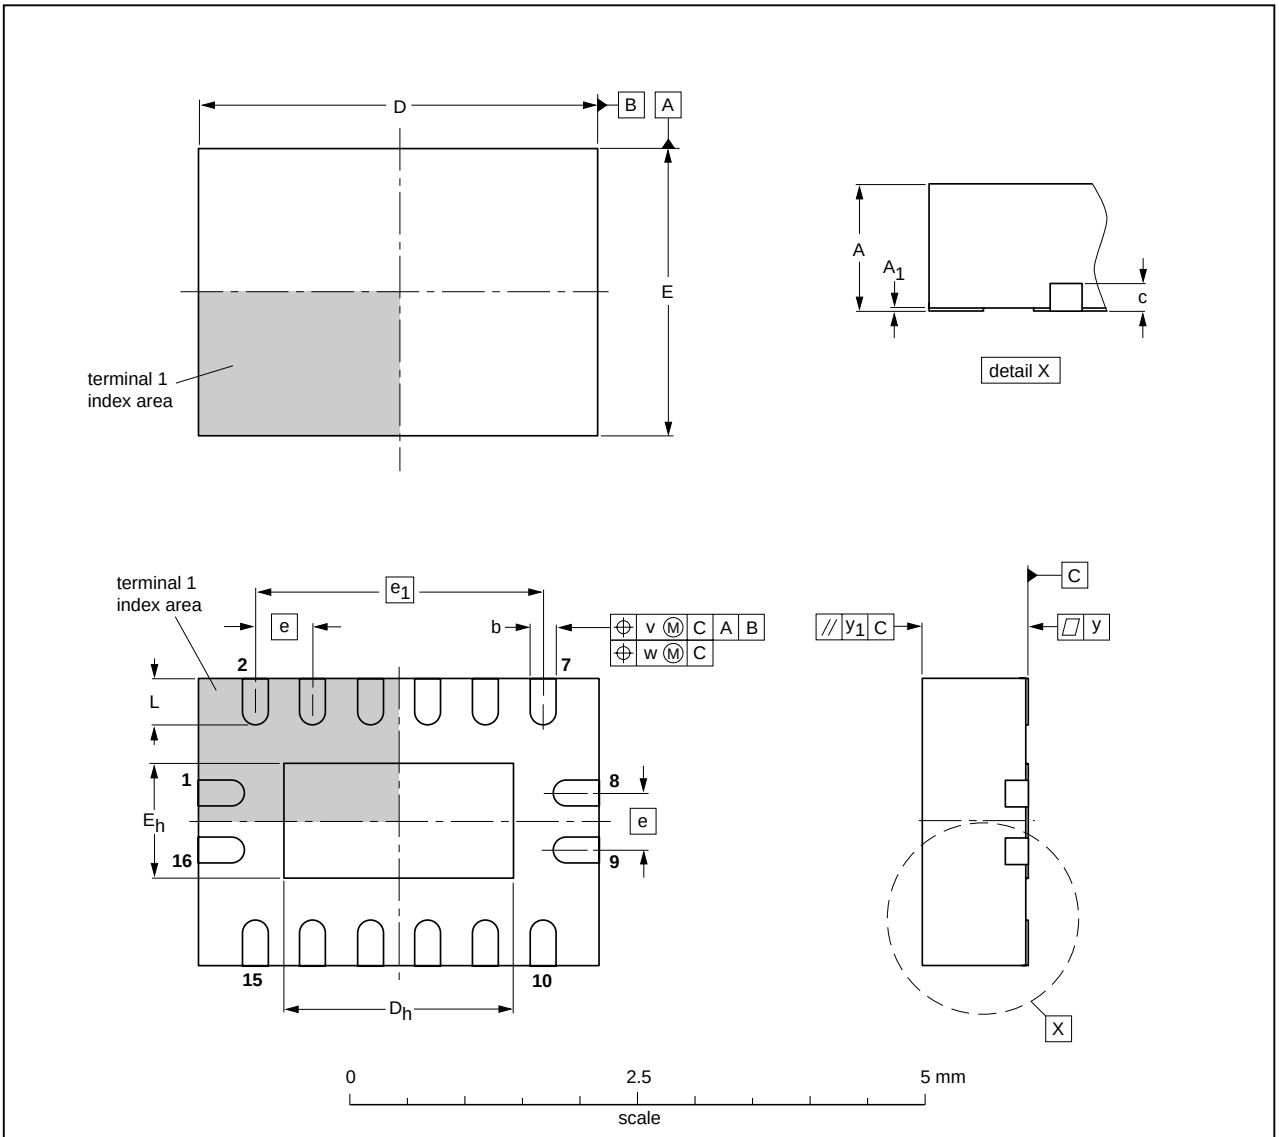

DIMENSIONS (mm are the original dimensions)

UNIT	$A^{(1)}$ max.	A_1	b	c	$D^{(1)}$	D_h	$E^{(1)}$	E_h	e	e_1	L	v	w	y	y_1
mm	1	0.05 0.00	0.30 0.18	0.2	3.6 3.4	2.15 1.85	2.6 2.4	1.15 0.85	0.5	2.5	0.5 0.3	0.1	0.05	0.05	0.1

Note

1. Plastic or metal protrusions of 0.075 mm maximum per side are not included.

OUTLINE VERSION	REFERENCES				EUROPEAN PROJECTION	ISSUE DATE
	IEC	JEDEC	JEITA			
SOT763-1	- - -	MO-241	- - -			~~02-10-17~~ 03-01-27

Fig 15. Package outline SOT763-1 (DHVQFN16)

© NXP B.V. 2009. All rights reserved.

14. Abbreviations

Table 16. Abbreviations

Acronym	Description
CDM	Charged Device Model
CMOS	Complementary Metal Oxide Semiconductor
DUT	Device Under Test
ESD	ElectroStatic Discharge
HBM	Human Body Model
MM	Machine Model

15. Revision history

Table 17. Revision history

Document ID	Release date	Data sheet status	Change notice	Supersedes
74AVC4T245_1	20090720	Product data sheet	-	-

© NXP B.V. 2009. All rights reserved.

16. Legal information

16.1 Data sheet status

Document status[1][2]	Product status[3]	Definition
Objective [short] data sheet	Development	This document contains data from the objective specification for product development.
Preliminary [short] data sheet	Qualification	This document contains data from the preliminary specification.
Product [short] data sheet	Production	This document contains the product specification.

[1] Please consult the most recently issued document before initiating or completing a design.

[2] The term 'short data sheet' is explained in section "Definitions".

[3] The product status of device(s) described in this document may have changed since this document was published and may differ in case of multiple devices. The latest product status information is available on the Internet at URL http://www.nxp.com.

16.2 Definitions

Draft — The document is a draft version only. The content is still under internal review and subject to formal approval, which may result in modifications or additions. NXP Semiconductors does not give any representations or warranties as to the accuracy or completeness of information included herein and shall have no liability for the consequences of use of such information.

Short data sheet — A short data sheet is an extract from a full data sheet with the same product type number(s) and title. A short data sheet is intended for quick reference only and should not be relied upon to contain detailed and full information. For detailed and full information see the relevant full data sheet, which is available on request via the local NXP Semiconductors sales office. In case of any inconsistency or conflict with the short data sheet, the full data sheet shall prevail.

16.3 Disclaimers

General — Information in this document is believed to be accurate and reliable. However, NXP Semiconductors does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information.

Right to make changes — NXP Semiconductors reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.

Suitability for use — NXP Semiconductors products are not designed, authorized or warranted to be suitable for use in medical, military, aircraft, space or life support equipment, nor in applications where failure or malfunction of an NXP Semiconductors product can reasonably be expected to result in personal injury, death or severe property or environmental damage. NXP Semiconductors accepts no liability for inclusion and/or use of NXP Semiconductors products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

Applications — Applications that are described herein for any of these products are for illustrative purposes only. NXP Semiconductors makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

Limiting values — Stress above one or more limiting values (as defined in the Absolute Maximum Ratings System of IEC 60134) may cause permanent damage to the device. Limiting values are stress ratings only and operation of the device at these or any other conditions above those given in the Characteristics sections of this document is not implied. Exposure to limiting values for extended periods may affect device reliability.

Terms and conditions of sale — NXP Semiconductors products are sold subject to the general terms and conditions of commercial sale, as published at http://www.nxp.com/profile/terms, including those pertaining to warranty, intellectual property rights infringement and limitation of liability, unless explicitly otherwise agreed to in writing by NXP Semiconductors. In case of any inconsistency or conflict between information in this document and such terms and conditions, the latter will prevail.

No offer to sell or license — Nothing in this document may be interpreted or construed as an offer to sell products that is open for acceptance or the grant, conveyance or implication of any license under any copyrights, patents or other industrial or intellectual property rights.

Export control — This document as well as the item(s) described herein may be subject to export control regulations. Export might require a prior authorization from national authorities.

16.4 Trademarks

Notice: All referenced brands, product names, service names and trademarks are the property of their respective owners.

17. Contact information

For more information, please visit: **http://www.nxp.com**

For sales office addresses, please send an email to: **salesaddresses@nxp.com**

© NXP B.V. 2009. All rights reserved.

18. Contents

1	**General description**	**1**
2	**Features**	**1**
3	**Ordering information**	**2**
4	**Functional diagram**	**2**
5	**Pinning information**	**3**
5.1	Pinning	3
5.2	Pin description	4
6	**Functional description**	**5**
7	**Limiting values**	**5**
8	**Recommended operating conditions**	**6**
9	**Static characteristics**	**6**
10	**Dynamic characteristics**	**10**
11	**Waveforms**	**14**
12	**Typical propagation delay characteristics**	**16**
13	**Package outline**	**20**
14	**Abbreviations**	**23**
15	**Revision history**	**23**
16	**Legal information**	**24**
16.1	Data sheet status	24
16.2	Definitions	24
16.3	Disclaimers	24
16.4	Trademarks	24
17	**Contact information**	**24**
18	**Contents**	**25**

Please be aware that important notices concerning this document and the product(s) described herein, have been included in section 'Legal information'.

© NXP B.V. 2009. All rights reserved.

For more information, please visit: http://www.nxp.com
For sales office addresses, please send an email to: salesaddresses@nxp.com

Date of release: 20 July 2009
Document identifier: 74AVC4T245_1

founded by

PHILIPS