

MA6X344

Silicon epitaxial planar type


For UHF and VHF electronic tuners

■ Features

- Three isolated elements contained in one package
- Large capacitance variation ratio
- Small series resistance r_D
- Mini type package, allowing downsizing of equipment and automatic insertion through the taping package


■ Absolute Maximum Ratings $T_a = 25^\circ\text{C}$

Parameter	Symbol	Rating	Unit
Reverse voltage (DC)	V_R	30	V
Peak reverse voltage	V_{RM}	34	V
Forward current (DC)	I_F	20	mA
Junction temperature	T_j	150	$^\circ\text{C}$
Storage temperature	T_{stg}	-55 to +150	$^\circ\text{C}$

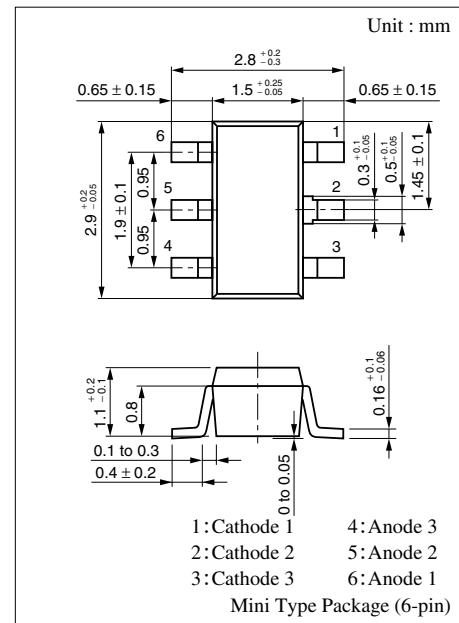

Marking Symbol: 5P

Internal Connection



■ Electrical Characteristics $T_a = 25^\circ\text{C}$





Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Reverse current (DC)	I_R	$V_R = 30 \text{ V}$			10	nA
Diode capacitance	$C_{D(3V)}$	$V_R = 3 \text{ V}, f = 1 \text{ MHz}$	11.233		12.781	pF
	$C_{D(25V)}$	$V_R = 25 \text{ V}, f = 1 \text{ MHz}$	2.020		2.367	pF
	$C_{D(10V)}$	$V_R = 10 \text{ V}, f = 1 \text{ MHz}$	4.358		5.422	pF
	$C_{D(17V)}$	$V_R = 17 \text{ V}, f = 1 \text{ MHz}$	2.567		3.100	pF
Capacitance ratio	$C_{D(3V)}/C_{D(25V)}$		4.60		6.15	—
Capacitance difference	$C_{D(17V)}/C_{D(25V)}$		0.37			pF
Diode capacitance deviation	ΔC	$C_{D(3V)(10V)(17V)(25V)}$			Note) ^{*1}	%
Series resistance ^{*2}	r_D	$C_D = 9 \text{ pF}, f = 470 \text{ MHz}$	0.55		0.75	Ω

Note) 1. Rated input/output frequency: 470 MHz

2. Each characteristic is a standard for each diode.

3. *1 : Diode capacitance deviation is controlled to 2% for the rank B and 3% or less for the rank G.

*2 : r_f measuring instrument: YHP MODEL 4191A RF IMPEDANCE ANALYZER

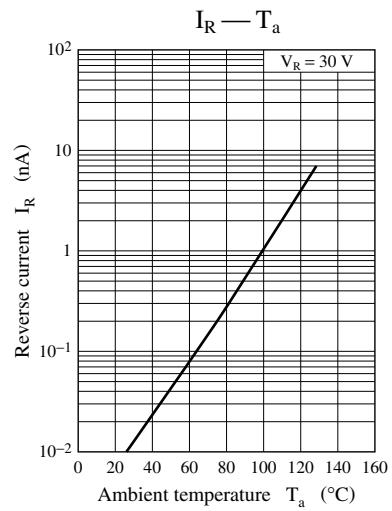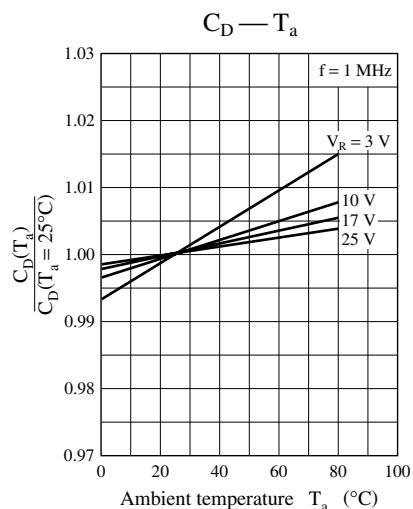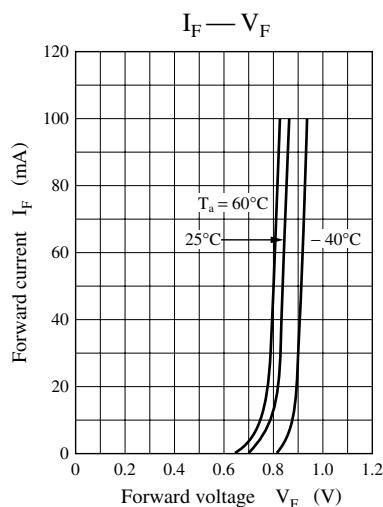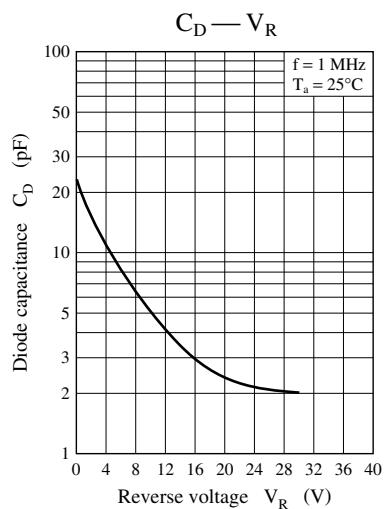

C_D rank classification

