

Power Inductor C2DEP1010



 **sumida**



■ Features


- ◎ Magnetically shielded construction.
- ◎ Storage temperature range: $-40^{\circ}\text{C}\sim+105^{\circ}\text{C}$.
- ◎ Operating temperature range: $-40^{\circ}\text{C}\sim+105^{\circ}\text{C}$ (including coil's self temperature rise).
- ◎ RoHS Compliance and Halogen Free.

■ Applications


Ideally used in D Class Amplifiers.

■ Dimensions/Recommended Land Patterns (mm)

◆ Dimensions

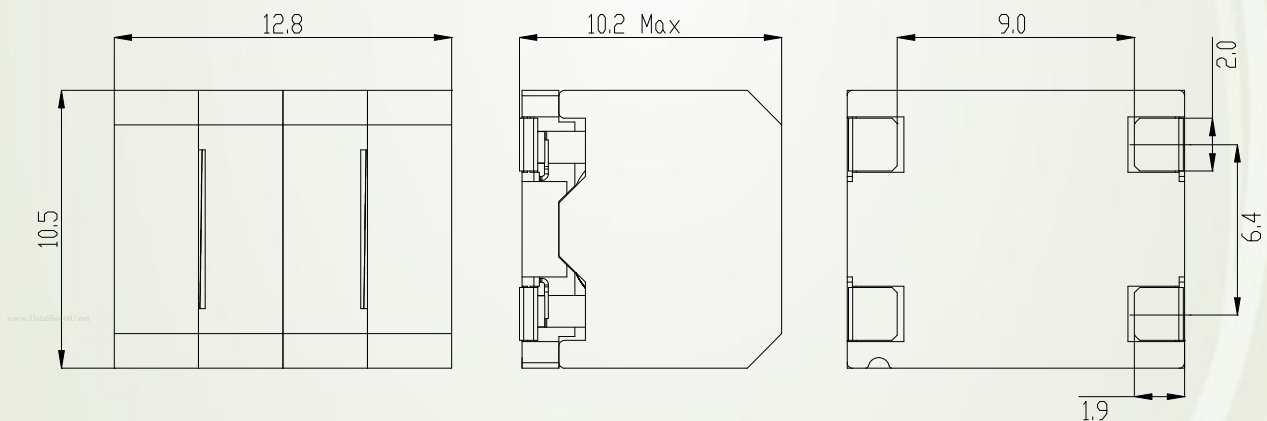

◆ Land pattern

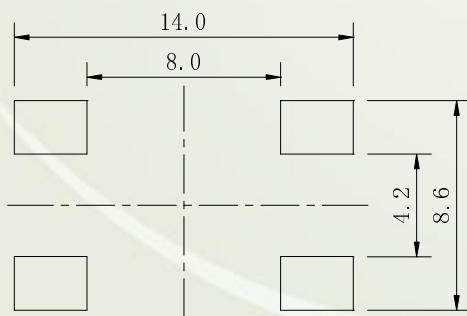

Power Inductor C2DEP1010



■Electrical Characteristics specification.

No.	Part Name	Stamp	Inductance (μ H) (1-2);(4-3) ※1	D.C.R. (m Ω) [MAX.] (at 20°C) (1-2);(4-3) ※2	Saturation current (A) (at 20°C) ※3 ※5	Temperature rise current (A) ※4 ※6
01	C2DEP1010NP-100MC-120	100	10 μ H \pm 20%	14.0 (11.0)	6.2(7.3)	6.6(7.6)
02	C2DEP1010NP-120MC-120	120	12 μ H \pm 20%	18.0 (15.0)	6.0(7.0)	5.7(6.5)
03	C2DEP1010NP-150MC-120	150	15 μ H \pm 20%	20.0 (16.0)	5.4(6.1)	5.4(6.2)
04	C2DEP1010NP-180MC-120	180	18 μ H \pm 20%	25.0 (21.0)	4.8(5.8)	5.0(5.6)
05	C2DEP1010NP-220MC-120	220	22 μ H \pm 20%	27.0 (22.0)	4.3(5.1)	4.9(5.5)

※1 Measuring frequency inductance at 100kHz .

※2, 5, 6 ()Typical value.

※3 Saturation current: The DC current at which the inductance decreases to 75% of its nominal value.






※4 Temperature rise current: The DC current at which the temperature rise is $\Delta t=40^{\circ}\text{C}$. ($T_a=20^{\circ}\text{C}$)

www.sumida.com

Power Inductor C2DEP1010



Rated Current Curve

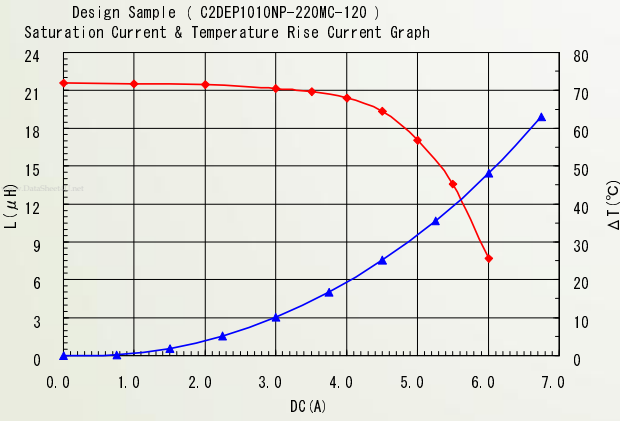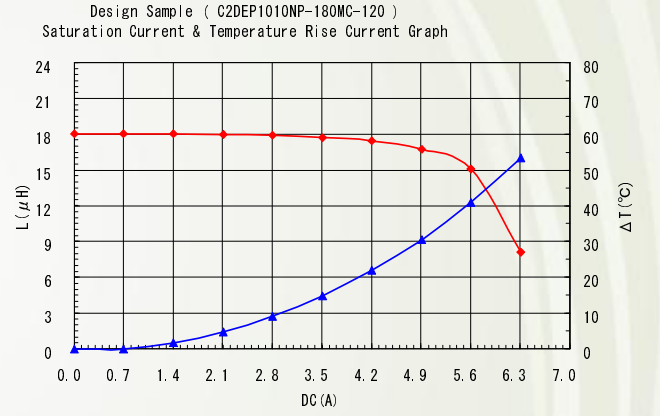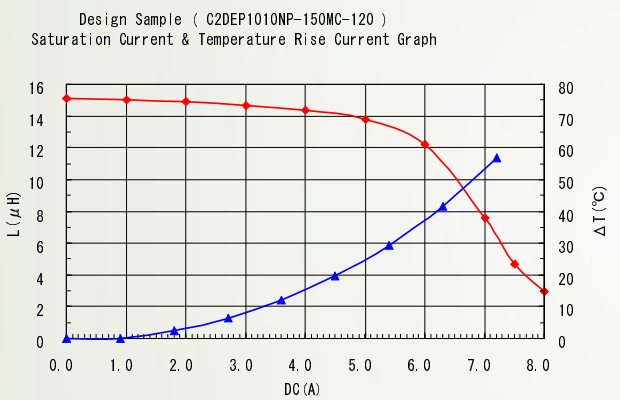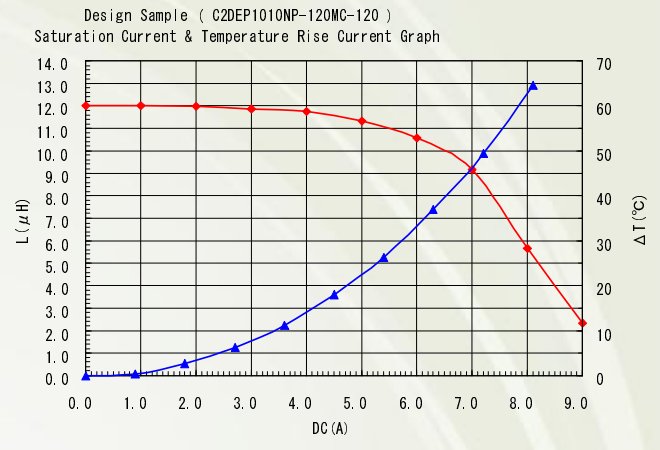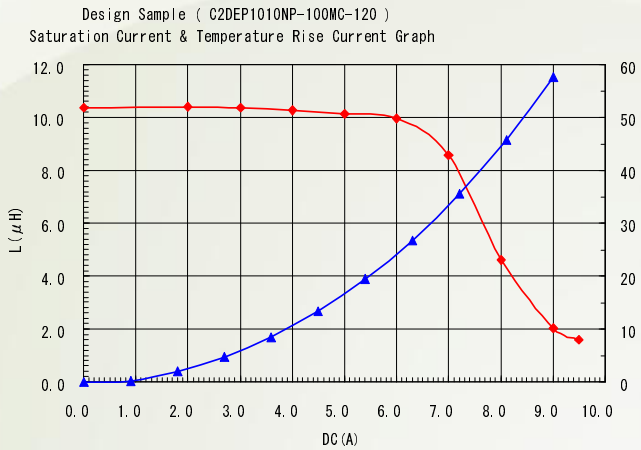

For More Information

Hong Kong

Tel.+852-2880-6688
FAX.+852-2565-9600

Tokyo

Tel.+81-3-5202-7112
FAX.+81-3-5202-7105

Chicago

Tel.+1-847-545-6700
FAX. +1-847-545-6720

Shanghai

Tel.+86-021-5836-3299
FAX.+86-021-5836-3266

Seoul

Tel.+82-2-6237-0777
FAX.+82-2-6237-0778

Obernzell

Tel.+49-8591-937-0
FAX. +49-8591-937-103

Shenzhen

Tel.+86-755-8291-0228
FAX.+86-755-8291-0338

Singapore

Tel.+65-6296-3388
FAX.+65-6296-3390

Neumarkt

Tel.+49-9181-4509-110
FAX. +49-9181-4509-310

Taipei

Tel.+886-2-8751-2737
FAX.+886-2-8751-2738

San Jose

Tel.+1-408-321-9660
FAX.+1-408-321-9308