





2.0 Amp Glass Passivated Sintered Ultra - Fast Rectifiers

UGFZ20A . . . 20G Series

Description

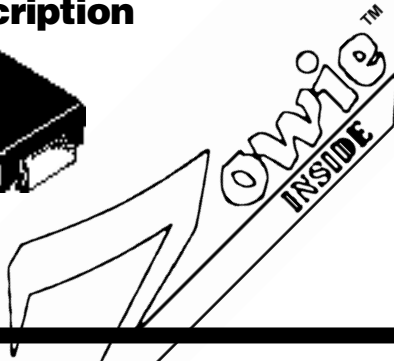

Mechanical Dimensions

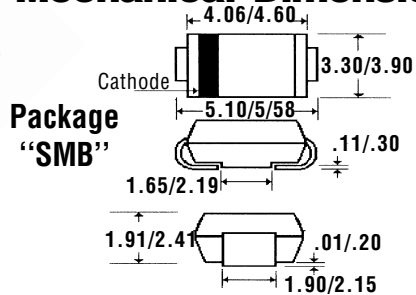

Features

- **LOWEST COST FOR GLASS SINTERED ULTRA - FAST CONSTRUCTION**
- **LOWEST V_F FOR GLASS SINTERED ULTRA - FAST CONSTRUCTION**
- **TYPICAL $I_R < 100$ nAmps**
- **2.0 AMP OPERATION @ $T_A = 55^\circ\text{C}$, WITH NO THERMAL RUNAWAY**
- **SINTERED GLASS CAVITY-FREE JUNCTION**

Electrical Characteristics @ 25°C.	UGFZ20A . . . 20G Series				Units
Maximum Ratings	20A	20B	20D	20G	
Peak Repetitive Reverse Voltage... V_{RRM}	50	100	200	400	Volts
RMS Reverse Voltage... $V_{R(rms)}$	35	70	140	280	Volts
DC Blocking Voltage... V_{DC}	50	100	200	400	Volts
Average Forward Rectified Current... $I_{F(av)}$ @ $T_L = 55^\circ\text{C}$ (Note 2)	2.0				Amps
Non-Repetitive Peak Forward Surge Current... I_{FSM} 8.3ms, ½ Sine Wave Superimposed on Rated Load	65				Amps
Forward Voltage @ 2.0A... V_F	< 0.95		> 1.25		Volts
Full Load Reverse Current... $I_R(av)$ Full Cycle Average @ $T_A = 125^\circ\text{C}$	100				µAmps
DC Reverse Current... $I_{R(max)}$ @ Rated DC Blocking Voltage $T_A = 25^\circ\text{C}$	5.0				µAmps
Typical Junction Capacitance... C_j (Note 1)	35				pF
Typical Thermal Resistance... $R_{\theta JA}$ (Note 2)	16				°C/W
Maximum Reverse Recovery Time... t_{RR} (Note 3)	35				nS
Operating & Storage Temperature Range... T_J, T_{STRG}	-65 to 175				°C

- NOTES:**
1. Measured @ 1 MHz and applied reverse voltage of 4.0V.
 2. 5.0mm² (.013mm thick) land areas.
 3. Reverse Recovery Condition $I_F = 0.5A$, $I_R = 1.0A$, $I_{RR} = 0.25A$.