

### FEATURES


- Improved EMI performance for FCC class B applications
- Line to line isolation: 500 Vrms
- Maximum common mode attenuation at 1MHz
- Well suited for many Telecom applications



Part Number	Turns Ratio Pri:sec±5%	OCL (mh MIN)	Common Mode Attenuation (dB TYP)			DCR (Ω MAX)
			100KHz	1MHz	10MHz	
S60401N	1:1	3.29~6.11	-30	-40	-25	1.00
S60402N	1:1	5.4~6.6	-30	-40	-25	0.38~0.48
S60405N	1:1	0.3	-30	-27	-42	0.40
S60406N	1:1	3.29~6.11	-50	-48	-35	1.00

- Electrical Specifications @25°C-Operating Temperature 0°C to 70°C.

### Mechanicals

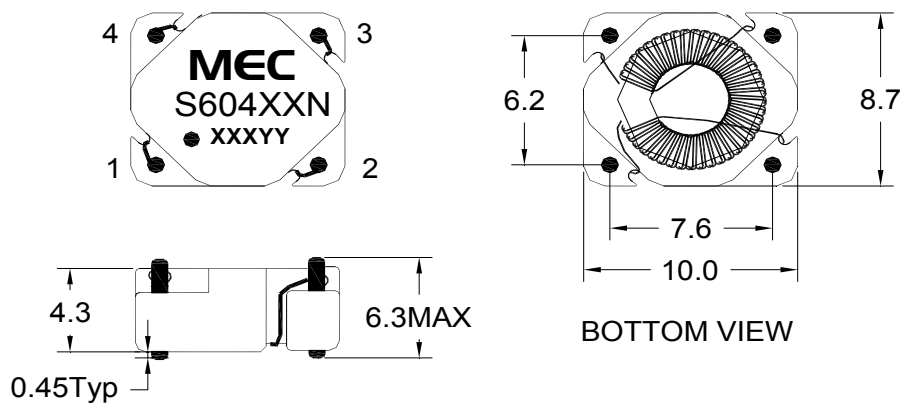

Dimension:mm Unless otherwise specified,all tolerances± 0.25

### Schematics

S60401N

S60402N

S60405N

S60406N

