

L200-0CW-60D

Super Cool White

5mm, Domed, 8.7mm Height

60° viewing angle

53 Lumens per Watt

(If = 20mA, Ta = 25°C)

DWG BY:
LL / JAG
08-02-06

CHK BY:
PL
08-04-06

QA:
GZ
08-07-06

MFG:
—
— — —


REVISION LTR: -
08-03-06

Part No.	L200-0CW-60D	DWG NO.	DSDC0452	Page	1 of 4
----------	--------------	---------	----------	------	--------

Features:

- High intensity
- Standard 5mm diameter package
- Tinned leads
- Pb-free

Package Dimensions:

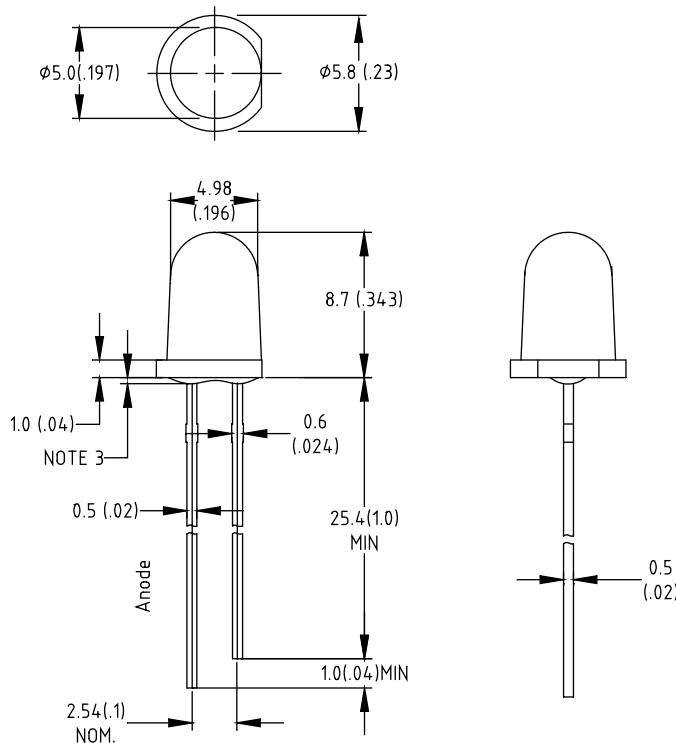

Part No.	Chip Material	Lens Color	Emission Color
L200-0CW-60D	InGaN	Water Clear	Super Cool White

Notes:

1. All dimensions are in millimeters (inches).
2. Tolerance is $\pm 0.25\text{mm}$ (.010") unless otherwise noted.
3. Protruded resin under flange is 1.0mm (.04") max.
4. Lead spacing is measured where the leads emerge from the package.
5. Specifications are subject to change without notice.
6. Precautions for ESD: Static electricity and surge can damage the LED. It is recommended to use a wristband or anti-electrostatic glove when handling the LED. All devices, equipment and machinery must be properly grounded.

Absolute Maximum Ratings at Ta=25°C

Parameter	MAX.	Unit
Power Dissipation	80	mW
Peak Forward Current (1/10 Duty Cycle, 0.1ms Pulse Width)	100	mA
Continuous Forward Current	20	mA
Derating Linear From 50°C	0.4	mA/°C
Reverse Voltage	5	V
Electrostatic Discharge (ESD)	150	V
Operating Temperature Range	-20°C to +80°C	
Storage Temperature Range	-30°C to +100°C	
Lead Soldering Temperature [4mm (.157") From Body]	260°C for 5 Seconds	

Electrical Optical Characteristics at Ta=25 °C

Parameter	Symbol	Min.	Typ	Max.	Unit	Test Condition
Luminous Intensity	I_V	1800	3400	---	mcd	$I_F=20mA$ (Note 1)
Viewing Angle	$2\theta_{1/2}$	---	60	---	Deg	(Note 2)
Forward Voltage	V_F	---	3.2	4.0	V	$I_F=20mA$
Reverse Current	I_R	---	---	50	μA	$V_R=5V$
SCP	---	---	0.27	---	---	---
Lumens	---	---	3.4	---	lm	---
Radiant Intensity	I_e	---	12000	---	$\mu W/sr$	---
Color Rendering Index	CRI	79	---	83	---	---


Color Rank	x	y	x	y	x	y	x	y
LTC & LTD	0.270	0.285	0.288	0.250	0.305	0.275	0.295	0.325

Notes:


1. Luminous intensity is measured with a light sensor and filter combination that approximates the CIE eye-response curve.
2. $q_{1/2}$ is the off-axis angle at which the luminous intensity is half the axial luminous intensity.
3. Forward voltage measurement allowance is $\pm 0.1V$
4. Luminous Intensity Measurement Allowance is $\pm 10\%$.

**Typical Electrical / Optical Characteristics Curves
 (25°C Ambient Temperature Unless Otherwise Noted)**


CE 1931 Chromaticity Diagram

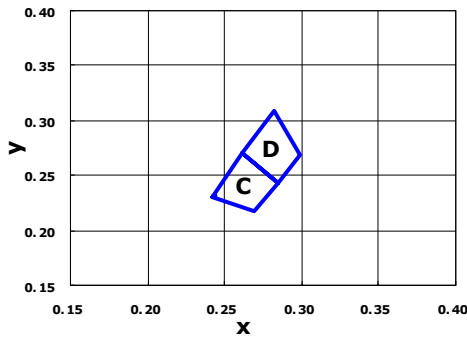


Spectral Radiance

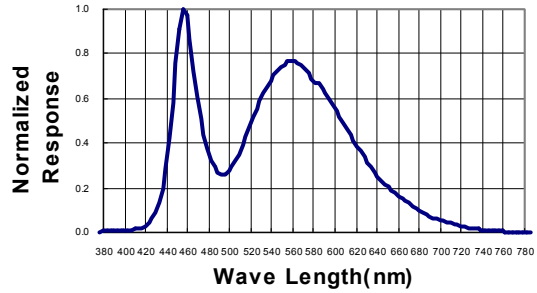


Relative Luminous Intensity vs Forward Current

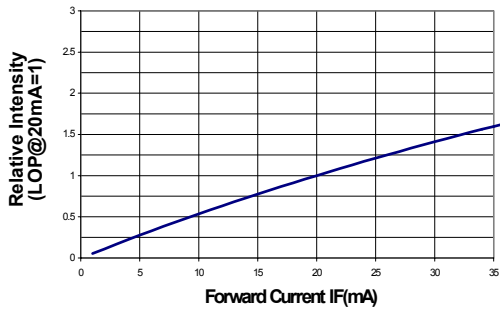


Forward Current vs Forward Voltage

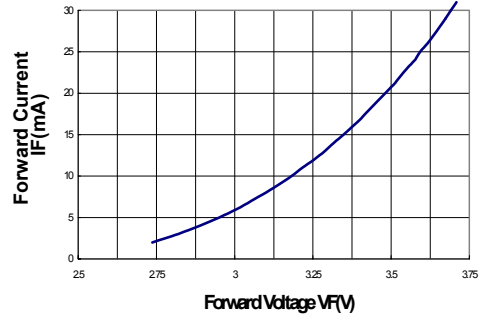

Forward Current VS. Chromaticity coordinate

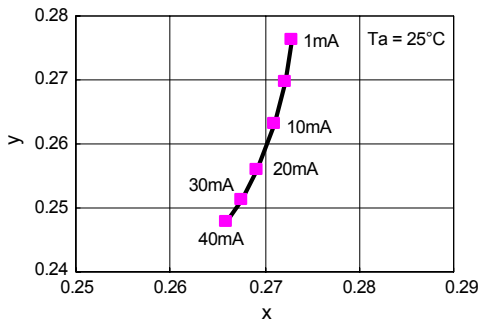

Forward Current Derating Curve

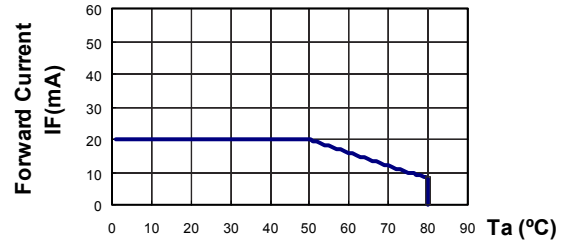

Beam Pattern

