



Description




Mechanical Dimensions

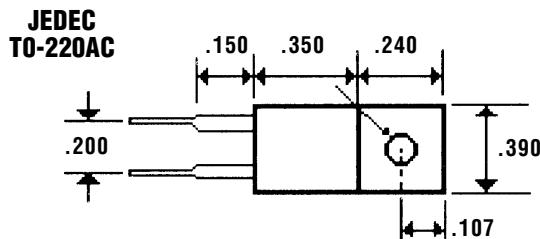

Features

- **HIGH CURRENT CAPABILITY WITH LOW V_F**
- **HIGH EFFICIENCY w/LOW POWER LOSS**
- **HIGH SURGE VOLTAGE AND TRANSIENT PROTECTION**
- **MEETS UL SPECIFICATION 94V-0**

Electrical Characteristics @ 25°C.	FBR1650 & 1660		Units
Maximum Ratings	FBR1650	FBR1660	
Peak Repetitive Reverse Voltage... V_{RRM}	50	60	Volts
Working Peak Reverse Voltage... V_{RWM}	50	60	Volts
DC Blocking Voltage... V_{DC}	50	60	Volts
Average Forward Rectified Current... $I_{F(av)}$ @ $T_c = 125^\circ\text{C}$	16	Amps
Repetitive Peak Forward Surge Current... I_{FSM} $T_c = 125^\circ\text{C}$ (Rated V_R , Square Wave, 20KHZ)	32	Amps
Non-Repetitive Peak Forward Surge Current... I_{FSM} @ Rated Load Conditions, 8.3mS, $\frac{1}{2}$ Sine Wave, Jедec Method	150	Amps
Repetitive Peak Reverse Surge Current... I_{RSM} @ 2uS PW, F = 1.0 KHZ	0.5	Amps
Forward Voltage... V_F			
Per Leg @ $I_F = 16$ Amps, 25°C75	Volts
Per Leg, 300uS, 2% Duty Cycle @ $I_F = 16$ Amps, 125°C65	Volts
DC Reverse Current (@ $V_R = V_{RWM}$)... I_R			
@ Rated DC Blocking Voltage $T_c = 25^\circ\text{C}$	1.0	mAmps
$T_c = 125^\circ\text{C}$	50	mAmps
Thermal Resistance, Junction to Case... $R_{\theta JC}$	3.0	°C / W
Voltage Rate of Change (Rated V_R)	1000	V / μS
Operating Temperature Range... T_J	-65 to 150	°C
Storage Temperature Range... T_{STRG}	-55 to 150	°C

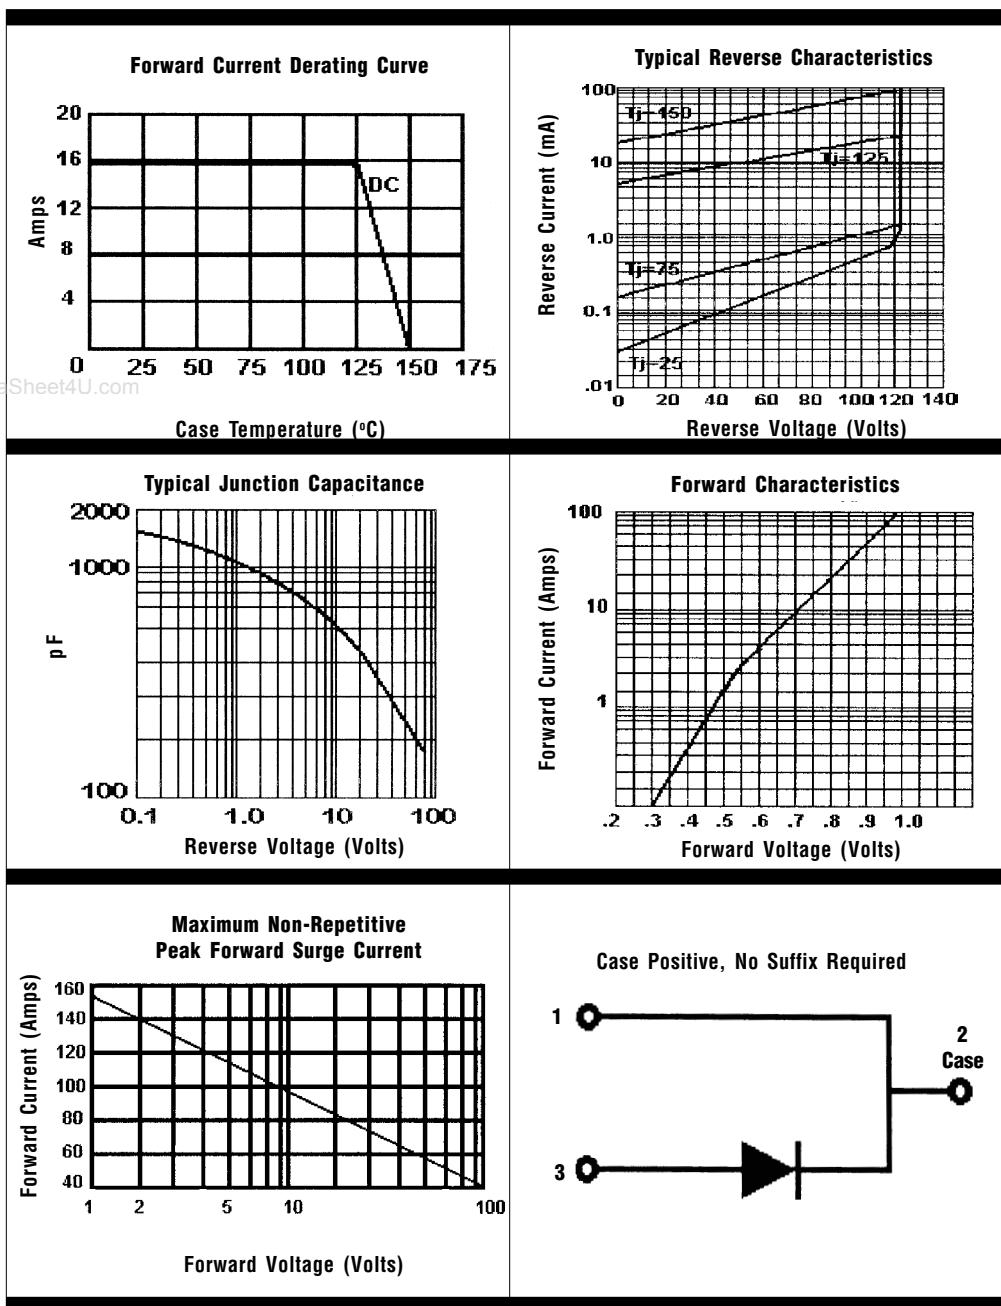

- NOTES:**
1. Measured @ 1 MHZ and applied reverse voltage of 4.0V.
 2. Thermal Resistance Junction to Case, Jedec Method.
 3. When Mounted to heat sink, from body.

Ratings at
25 Deg. C ambient
temperature
unless otherwise
specified.

Single Phase Half
Wave, 60 HZ
Resistive or
Inductive Load.

For Capacitive
Load, Derate
Current by 20%.