

LMC - BS1B16	16 CHARS/1 LINES	1/16 DUTY	1/4 BIAS
--------------	------------------	-----------	----------

Part Numbering System

1. FEATURE:

LCD MODE	STN
BACKLIGHT TYPE	LED BACKLIGHT
CHARACTER FONTS	5/8 DOTS (WITH CURSOR)
CONTROLLER	NT44780 OR EQUIVALENT
POWER SUPPLY FOR LCM	DC +5V
LED BACKLIGHT INPUT	DC +5V
EL BACKLIGHT INPUT	AC90~100V(400~700HZ)
EL INVERTER	SDEC-I002A(I005)

3. ABSOLUTE MAXIMUM RATINGS:

ITEM	SYMBOL	MIN	TYP	MAX	UNIT
OPERATING TEMP.	TOP	0	-	50	° C
STORAGE TEMP.	TST	-10	-	60	° C
INPUT VOLTAGE	VI	VSS	-	VDD	V
SUPPLY VOL-LOGIC	VDD-VSS	-	5.0	6.5	V
SUPPLY VOL-LCD	VDD-VO	-	-	6.5	V


5. INTERFACE PIN CONNECTIONS:

NO	SYM	LEVEL	FUNCTION	NO	SYM	LEVEL	FUNCTION
1	VSS	-	0V	9	DB2	H/L	DATA BIT 2
2	VDD	-	5V	10	DB3	H/L	DATA BIT 3
3	VO	-	CONTRAST ADJ	11	DB4	H/L	DATA BIT 4
4	RS	H/L	REGISTER SELECT	12	DB5	H/L	DATA BIT 5
5	R/W	H/L	READ/WRITE	13	DB6	H/L	DATA BIT 6
6	E	H.H.-L	ENABLE SIGNAL	14	DB7	H/L	DATA BIT 7
7	DB0	H/L	DATA BIT 0	15	A(+)	5V	BACKLIGHT
8	DB1	H/L	DATA BIT 1	16	K(-)	0V	BACKLIGHT

2. ELECTRICAL CHARACTERISTICS:

ITEM	SYM	CONDITION	MIN	TYP	MAX	UNIT
SUPPLY VOLTAGE FOR LCD	VDD - VO	Ta=0 ° C	-	4.7	-	V
		Ta=25 ° C	-	4.5	-	V
		Ta=50 ° C	-	4.3	-	V
INPUT VOLTAGE	VI	-	4.5	5.0	5.5	V
INPUT HIGH VOL	VIH	-	2.2	-	VDD	V
INPUT LOW VOL	VIL	-	0	-	0.6	V
OUTPUT HIGH VOL	VOH	-	2.4	-	-	V
OUTPUT LOW VOL	VOL	-	-	-	0.4	V
SUPPLY CURRENT	IDD	VDD=5v	-	2.0	3.6	mA
LED CURRENT	IF	Ta=25 ° C	-	300	-	mA
LED DISSIPATION	PD	Ta=25 ° C	-	1500	-	mW

4. BLOCK DIAGRAM:

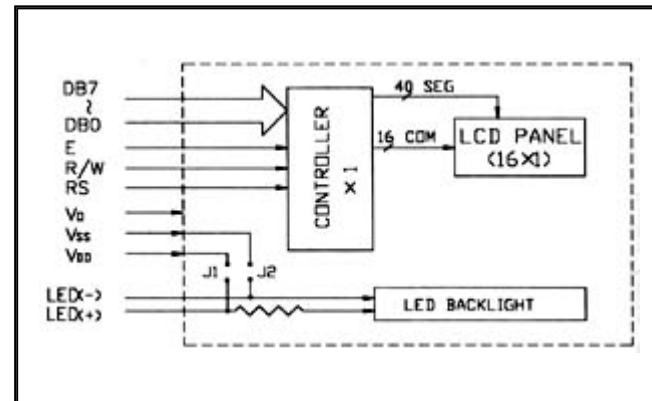

6. DISPLAY CHARACTER ADDRESS CODE:

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	
L1	80	81	82	83	84	85	86	87	C0	C1	C2	C3	C4	C5	C6	C7

7. DIMENSIONAL DRAWING:

