


### Electrical Specification ( $T_A=25^\circ\text{C}$ )


Parameter	Unit	Min	Typ	Max	Test condition	Parameter	Unit	Min	Typ	Max	Test condition
Frequency range	MHz	--	16000	--	$V_T \approx 11\text{V}$	Pushing	MHz/V	--	1.0	--	$V_{cc}:8.55\text{~}9.45\text{V}$
Tuning voltage	V	1	--	11	--	Tuning port capacitance	pF	--	5.0	--	--
Tuning sensitivity	MHz/V	--	2.0	--	16000MHz	Input impedance	MΩ	--	10	--	--
Power output	dBm	8	--	--	16000MHz	Output impedance	Ω	--	50	--	--
Output power vibration vs. Temp	dB	--	3	--	-40°C ~ +70°C	Frequency drift	MHz	--	8.0	10.0	-40°C ~ +70°C
Phase noise SSB At offset frequency	dBc/Hz	--	-95	--	fm=10KHz	DC voltage	V	8.55	9	9.45	--
		--	-120	--	fm=100KHz	DC current	mA	--	100	120	--
Harmonic	dBc	--	--	-20	16000MHz	Operating temp range	°C	-40	--	+70	--
Spurious	dBc	--	--	-70	16000MHz	Storage temp range	°C	-55	--	+85	--

### Typical performance

a. Frequency, output power, current  
Tuning sensitivity

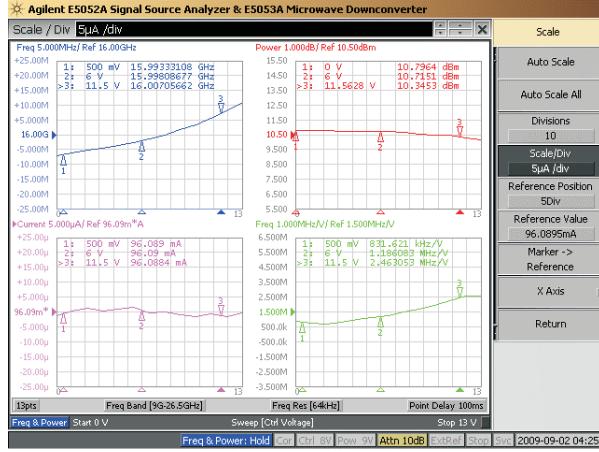

b. Phase noise

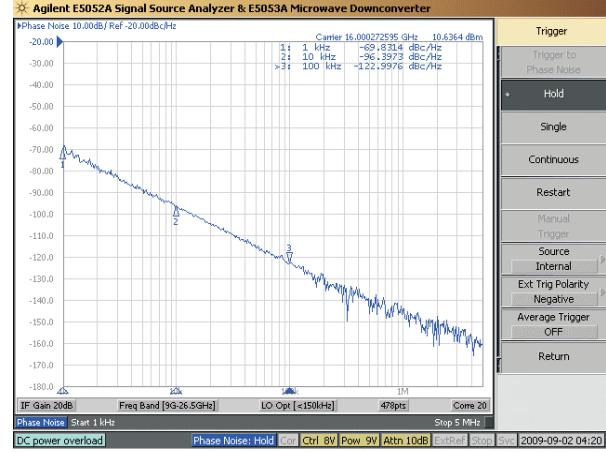

### Absolute Ratings

Power Voltage	11V
Max Tuning Voltage	15V
Min Tuning Voltage	-0.7V

