
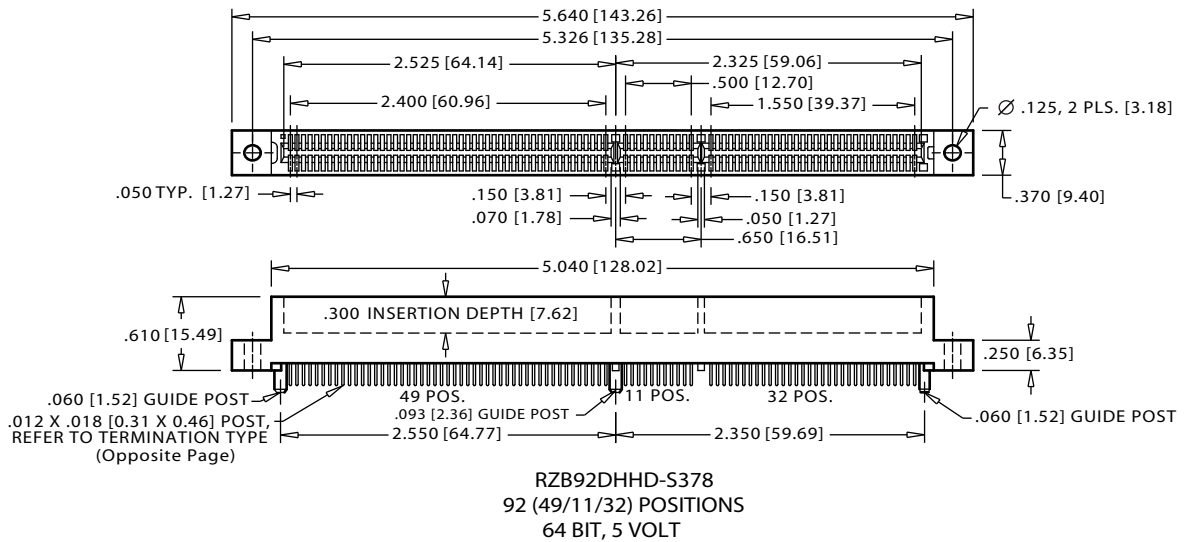
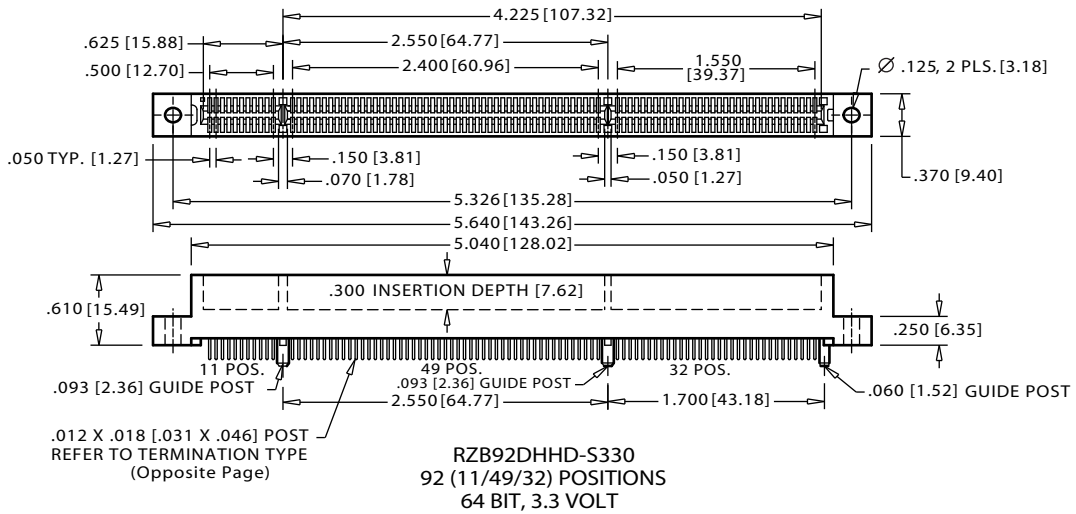


# .050" [1.27mm] CONTACT CENTERS [PCI]

## DIMENSIONS

Dimensions in [ ] are in millimeters, all others in inches

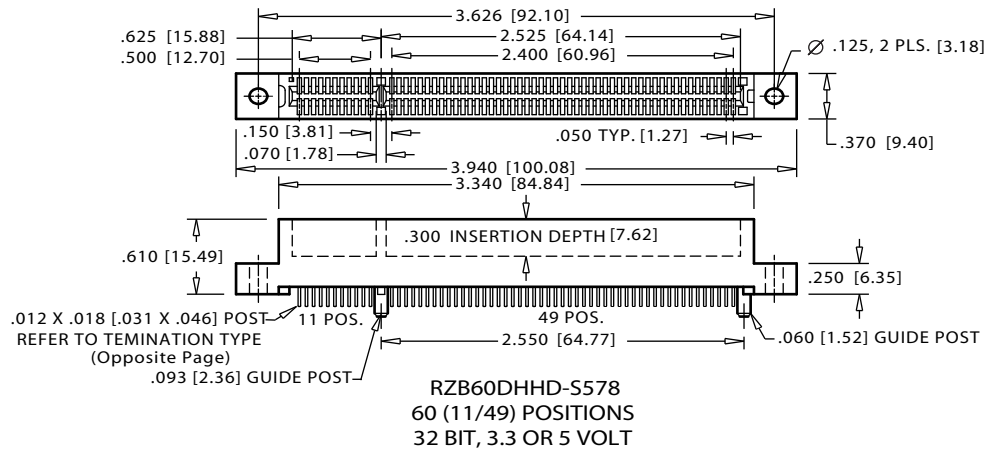

# .050" [1.27mm] CONTACT CENTERS [PCI]

## PART NUMBER CODING

**MATERIALS (Insulator/Contact)**  
 R = PPS/Phosphor Bronze  
 A = PPS/Beryllium Copper  
 L = PCT/Phosphor Bronze  
 M = PCT/Beryllium Copper  
 Consult Factory for Other Materials

**CONTACT FINISH**  
 Contact Surface      Termination      Underplate  
 Z = .000010" Gold    .000100" Tin    .000050" Nickel  
 X = .000030" Gold    .000100" Tin    .000050" Nickel

**CONTACT CENTERS**  
 B = .050" [1.27 mm]

**NUMBER OF CONTACT POSITIONS**  
 60 = 11/49      (32 Bit, 3.3 or 5 Volt)  
 92 = 11/49/32    (64 Bit, 3.3 Volt)  
 or 92 = 49/11/32    (64 Bit, 5 Volt)

**READOUT**  
 D = Dual

### MODIFICATIONS

**PCI WITH GUIDE POSTS:**  
 -S330 = 92 (11/49/32)    Positions (64 Bit, 3.3 Volt)  
 -S378 = 92 (49/11/32)    Positions (64 Bit, 5 Volt)  
 -S578 = 60 (11/49)        Positions (32 Bit, 3.3 or 5 Volt)

**PCI WITHOUT GUIDE POSTS:**  
 -S329 = 92 (11/49/32)    Positions (64 Bit, 3.3 Volt)  
 -S250 = 92 (49/11/32)    Positions (64 Bit, 5 Volt)  
 -S621 = 60 (11/49)        Positions (32 Bit, 3.3 or 5 Volt)

### MOUNTING STYLE



D = Flush Mounting  
 N = No Mounting  
 T = Flush Mounting With Threaded Insert  
 Q = Straddle Mount  
 R = Metal Boardlocks

### TERMINATION TYPE

HH = Staggered Dip Solder  
 HR = Card Extender  
 HF = Surface Mount  
 HL = .250" [6.35mm] x .160" [4.06mm] Dip Solder  
 HN = .100" [2.54mm] x .125" [3.18mm] Dip Solder

(REPLACES TERMINATIONS: CH, CR, CF, CL, CN)

## READOUT

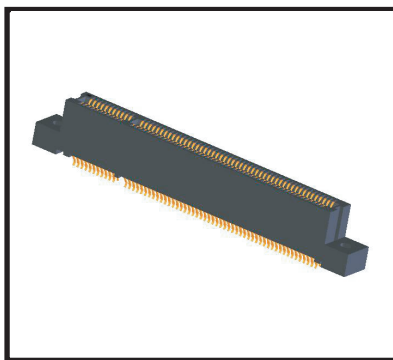


## FEATURES

- \* Accommodates .062 ±.008" PC board  
(Consult factory for other board thicknesses)
- \* PPS or PCT insulator
- \* Molded-in key available
- \* High reliability/high cycle hairpin bellows contact
- \* 1 amp current rating
- \* 150 grams normal force minimum

## TERMINATION TYPE

FOR PC BOARD LAYOUTS REFER TO WWW.EDGE CARDS.COM

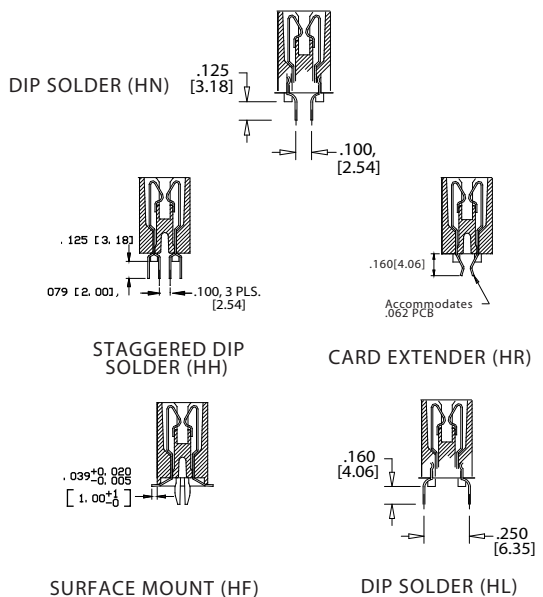

## MOUNTING STYLE

