



PRELIMINARY

SOLID STATE DEVICES, INC

14849 Firestone Boulevard · La Mirada, CA 90638
Phone: (714) 670-SSDI (7734) · Fax: (714) 522-7424



SSR2040


Designer's Data Sheet

FEATURES:

- Extremely Low Forward Voltage Drop
- Hermetically Sealed Power Surface Mount Package
- Guard ring for overvoltage protection
- Eutectic Die Attach
- 150°C Operating Junction Temperature

- TX, TXV, and Space Level Screening Available

**20 AMP
40 VOLTS
SCHOTTKY
RECTIFIER**

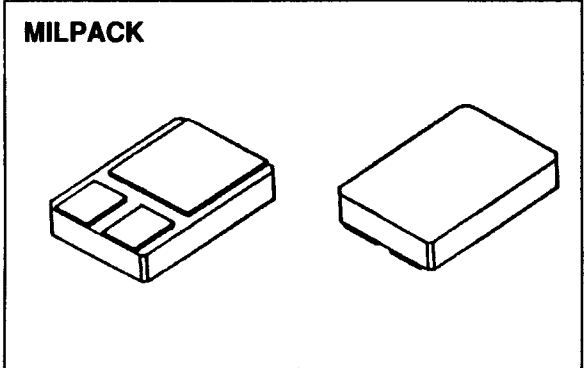

MAXIMUM RATINGS

RATING	SYMBOL	VALUE	UNIT
Peak Repetitive Reverse and DC Blocking Voltage	VRRM	40	Volts
	VRWM		
	VR		
Average Rectified Forward Current (Resistive Load, 60Hz, Sine Wave, TA=25°C)	IO	20	Amps
Peak Surge Current (8.3 ms Pulse, Half Sine Wave Superimposed on IO, allow junction to reach equilibrium between pulses, TA=25°C)	IFSM	300	Amps
Operating and storage temperature	Top & Tstg	-65 to +150	°C
Maximum Thermal Resistance Junction to Case	RθJC	1.8	°C/W

NOTE: All specifications are subject to change without notification. SSDI's for these devices should be reviewed by SSDI prior to release.

DATA SHEET#: RS0153 B

MED

SSR2040

PRELIMINARY

SSDI
SOLID STATE DEVICES, INC

14849 Firestone Boulevard · La Mirada, CA 90638
Phone: (714) 670-SSDI (7734) · Fax: (714) 522-7424

ELECTRICAL CHARACTERISTICS

CHARACTERISTICS	SYMBOL	MAXIMUM	UNIT
Instantaneous Forward Voltage Drop (IF = 5 Adc, TA=25°C, 300µs Pulse) (IF = 10 Adc, TA=25°C, 300µs Pulse) (IF = 20 Adc, TA=25°C, 300µs Pulse)	VF1	0.38 0.47 0.62	Vdc
Instantaneous Forward Voltage Drop (IF = 10 Adc, TA= - 55°C, 300µs Pulse)	VF2	0.52	Vdc
Reverse Leakage Current (Rated VR, TA=25°C, 300µs pulse minimum)	IR1	5	mA
Reverse Leakage Current (Rated VR, TA=100°C, 300µs pulse minimum)	IR2	200	mA
Junction Capacitance (VR = 10 Vdc, TA=25°C, f = 1 MHz)	CJ	800	pf


CASE OUTLINE: MILPACK

PIN OUT:

PIN 1: CATHODE
PIN 2: ANODE
PIN 3: ANODE

NOTE:

For best results,
connect Pin
2 & 3 in application

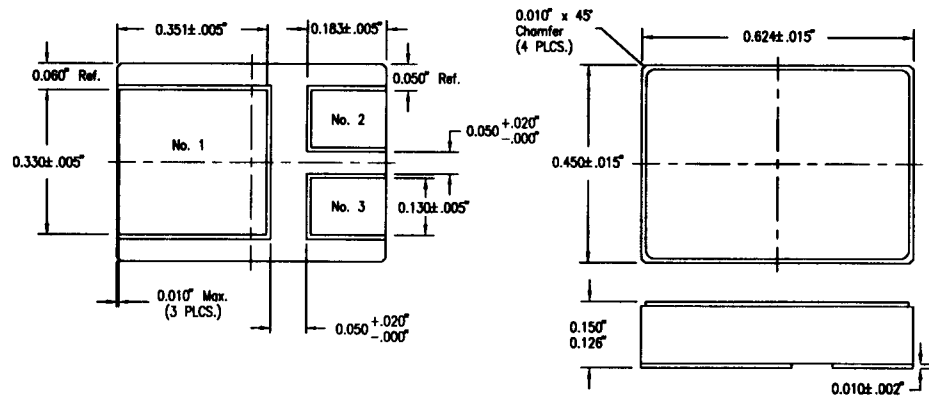

TYPICAL OPERATING CURVES (TA=25°C Unless otherwise specified)

