




Dimensions

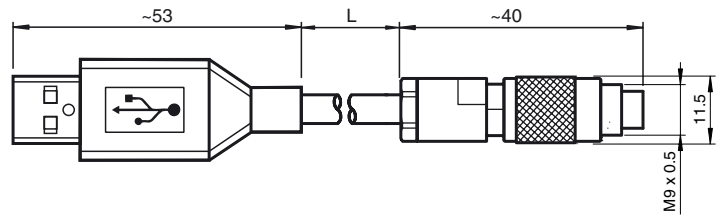

Model Number

USBA-2M-PUR-V34-G

Connection cable, USB on M9, PUR cable, 4-pin

Features

- USB 2.0
- Suitable for 12 mbit/s (full speed)
- Two-fold screening

Technical data

General specifications

Number of poles	4
Connection 1	Connector, male
Construction type 1	straight
Threading 1	USB Type A
Connection 2	Connector, male
Construction type 2	straight
Threading 2	M9

Electrical specifications

Operating voltage	U_B	max. 30 V DC
Operating current		max. 100 mA


Ambient conditions

Ambient temperature	-40 ... 80 °C (233 ... 353 K)
---------------------	-------------------------------



Mechanical specifications

Material	
Cable	PUR
Slotted nut	CuZn, nickel-plated
Cable	
Sheath diameter	Ø 4.5 mm
Colour	grey
Cores	0.081 mm ² (AWG28) 2 x 0.125 mm ² (AWG26)
Shield	Film Around data leads, braided around all leads
Length	L 2 m
Mass	approx. 73 g

Electrical connection 1



Electrical connection 2



Release date: 2008-08-19 18:10 Date of issue: 2008-09-16 204957_ENG.xml