



**COTCO LUMINANT DEVICE (HUIZHOU) LTD.**

---

### **SPECIFICATION FOR COTCO LED LAMP**

Document No: SPE/LM1-PPG1-11-N1-MT  
Model No : LM1- PPG1-11-N1-MT  
Rev. No : 02  
Date: 2006-02-22

Description:

120 Degree 3.2x2.7 mm Power SMD in  
Pure Green Color with Water Transparent


\*This specification is only for MT\*

Dice Material: InGaN

Confirmed

By Customer: \_\_\_\_\_

Date: \_\_\_\_\_

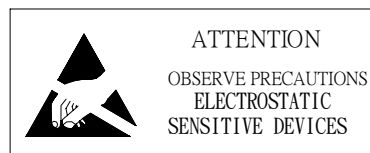

For part availability and ordering information please call Toll Free: 800.984.5337  
Website: [www.marktechopto.com](http://www.marktechopto.com) | Email: [info@marktechopto.com](mailto:info@marktechopto.com)

Document No.	SPE/LM1-PPG1-11-N1-MT
Rev. No.	01


**Applications:**

- Indicators
- Illuminations
- LCD Back Lights
- Automobile's Applications

**Absolute Maximum Ratings at Ta = 25°C**

Items	Symbol	Absolute maximum Rating	Unit
Forward Current	I <sub>F</sub>	30	mA
Peak Forward Current*	I <sub>FP</sub>	100	mA
Reverse Voltage	V <sub>R</sub>	5	V
Power Dissipation	P <sub>D</sub>	130	mW
Operation Temperature	T <sub>opr</sub>	-40 ~ + 100	°C
Storage Temperature	T <sub>stg</sub>	-40 ~ + 100	°C
Junction temperature	T <sub>j</sub>	+110	°C
Junction/ambient **	R <sub>th JA</sub>	350	°C/W
Junction/solder point	R <sub>th JS</sub>	200	°C/W

**Dimension Drawing**

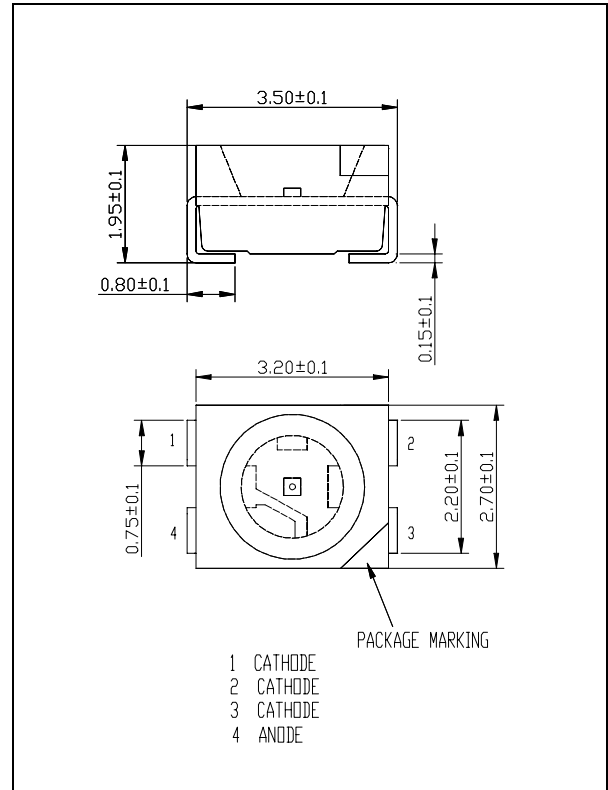

\*pulse width≤0.1msec duty≤1/10 \*\* R<sub>th</sub> test condition: Mounted on PC Board FR 4(pad size≥16mm<sup>2</sup>)

**Typical Electrical & Optical Characteristics ( Ta = 25°C)**

Items	Symbol	Condition	Min.	Typ.	Max.	Unit
Forward Voltage	V <sub>F</sub>	I <sub>F</sub> = 30mA	---	3.6	4.2	V
Reverse Current	I <sub>R</sub>	V <sub>R</sub> = 5V	---	---	10	μA
Luminous Intensity	I <sub>v</sub>	I <sub>F</sub> = 30mA	450	700	---	mcd
Dominant Wavelength	λ <sub>D</sub>	I <sub>F</sub> = 30mA	516	527	536	nm
50% Power Angle	2 θ <sub>½</sub>	I <sub>F</sub> = 30mA	---	120	---	deg

Document No.	SPE/LM1-PPG1-11-N1-MT
Rev. No.	01


**Standard bins for LM1-PPG1-11-N1-MT ( $I_F = 30\text{mA}$ ):**

Lamps are sorted to Luminous Intensity  $-I_V$  & Dominant Wavelength  $-\lambda_D$  bins shown.

Orders for LM1-PPG1-11-N1-MT may be filled with any or all bins contained as below.

All Luminous Intensity  $-I_V$  & Dominant Wavelength  $-\lambda_D$  values shown and specified are at  $I_F=30\text{mA}$ .

**\*U1+**

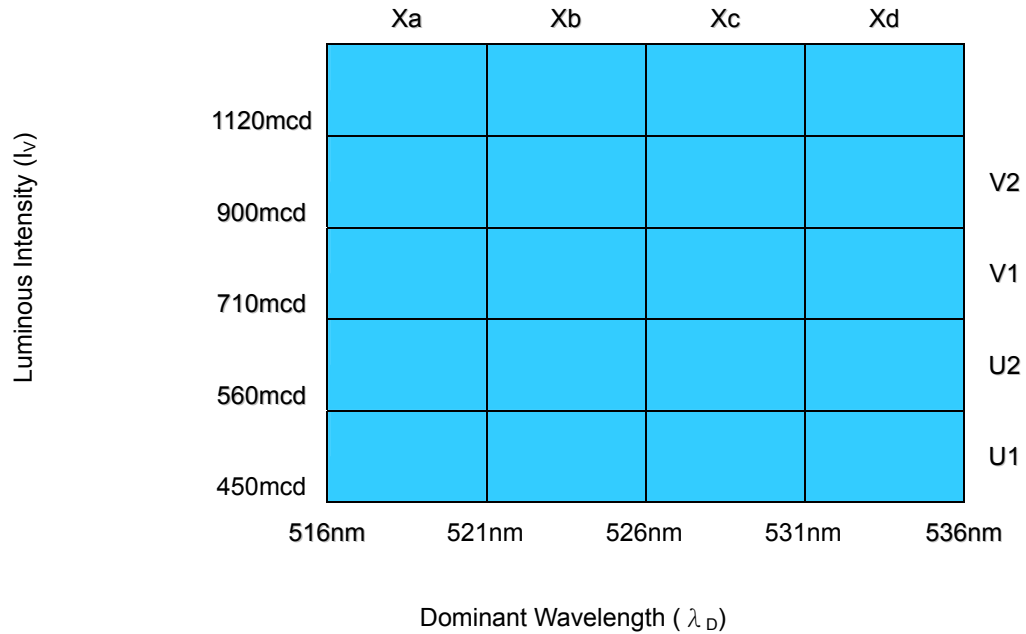

\*U1+ indicates Luminous Intensity is at U1 bin or above.

**Forward Voltage ( $V_F$ )**

Rank	Vh	Vd	Ve	Vf
Voltage	2.6-3.0V	3.0-3.4V	3.4-3.8V	3.8-4.2V

**#The quantity not enough for full reel**

VF(V)	2.6-3.4	3.4-4.2
-------	---------	---------

\*Majority VF bins are highlighted in Yellow.

**Important Notes:**

- 1) All ranks will be included per delivery, rank ratio will be based on Dices distribution.
  - 2) Tolerance of measurement of luminous intensity is  $\pm 10\%$
  - 3) Tolerance of measurement of dominant wavelength is  $\pm 1\text{nm}$ .
  - 4) Tolerance of measurement of Vf is  $\pm 0.05\text{V}$ .
  - 5) Packaging methods are available for selection, please refer to PACKAGING STANDARD.
- #The notice is only apply quantity not enough for full reel.
- 6) Please refer to LED LAMP RELIABILITY TEST STANDARD for reliability test conditions.
  - 7) Please refer to APPLICATION NOTES for Application.

Document No.	SPE/LM1-PPG1-11-N1-MT
Rev. No.	01

### Graphs

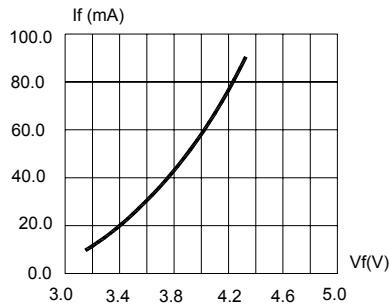


FIG.1 FORWARD CURRENT VS. FORWARD VOLTAGE.

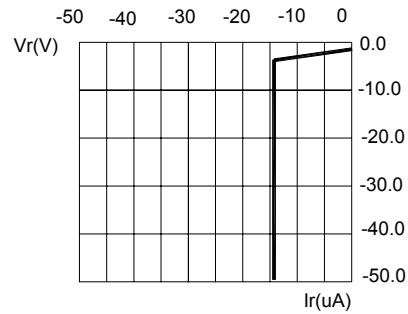


FIG.2 REVERSE CURRENT VS. REVERSE VOLTAGE.

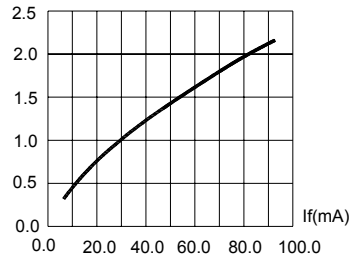


FIG.3 RELATIVE LUMINOUS INTENSITY VS. FORWARD CURRENT

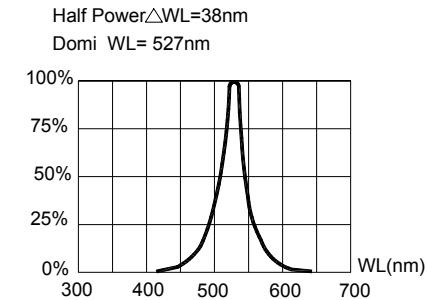


FIG.4 RELATIVE LUMINOUS INTENSITY VS. WAVELENGTH.

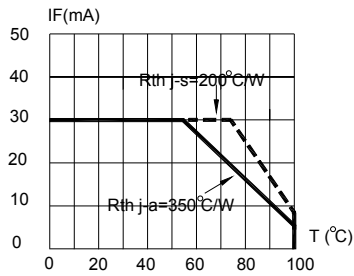


FIG.5 MAXIMUM FORWARD DC CURRENT VS TEMPERATURE. DERATING BASED ON  $T_{jmax}=110^{\circ}C$

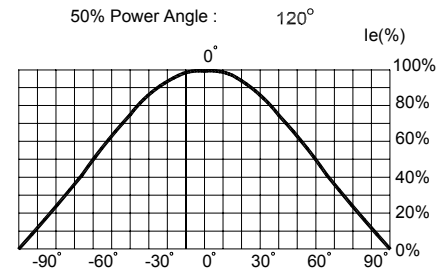


FIG.6 FAR FIELD PATTERN

Items	Signatures	Date	Revision History		
			Rev.No	Date	Change Description
Prepared by	Meiliping	2006-02-22	02	2006-02-22	Highlight Vd, Ve.
Checked by	XieJH	2006-02-22			
Approved by	DavidLiu	2006-02-22			
FCN#	FCN20060				

Data is subject to change without prior notice.

Copyright@2002 Cotco International Ltd.