

SPECIFICATION FOR COTCO LED LAMP

Document No: SPE/LM1-UYL1-01-N1-MT
Model No : LM1-UYL1-01-N1-MT
Rev. No : 00
Date: 2007-10-08

Description:

120 Degree 3.2 x 2.7mm SMT-LED in Amber
Color with Water Transparent


This specification is only for MT

Dice Material: AlGaInP

Confirmed

By Customer: _____

Date: _____

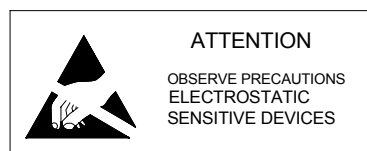

Document	SPE/LM1-UYL1-01-N1-MT
Rev. No.	00


Applications:

- Indicators
- Illuminations
- LCD Back Lights
- Automobile's Applications

Absolute Maximum Ratings at Ta = 25°C

Items	Symbol	Absolute maximum Rating	Unit
Forward Current	I _F	50	mA
Peak Forward Current*	I _{FP}	200	mA
Reverse Voltage	V _R	5	V
Power Dissipation	P _D	130	mW
Operation Temperature	T _{opr}	-40 ~ + 100	°C
Storage Temperature	T _{stg}	-40 ~ + 100	°C
Junction temperature	T _j	+110	°C
Junction/ambient **	Rth _{JA}	450	°C /W
Junction/solder point	Rth _{JS}	300	°C /W
Electrostatic Discharge Classification (MIL-STD-883E)	ESD	Class II	

Dimension Drawing

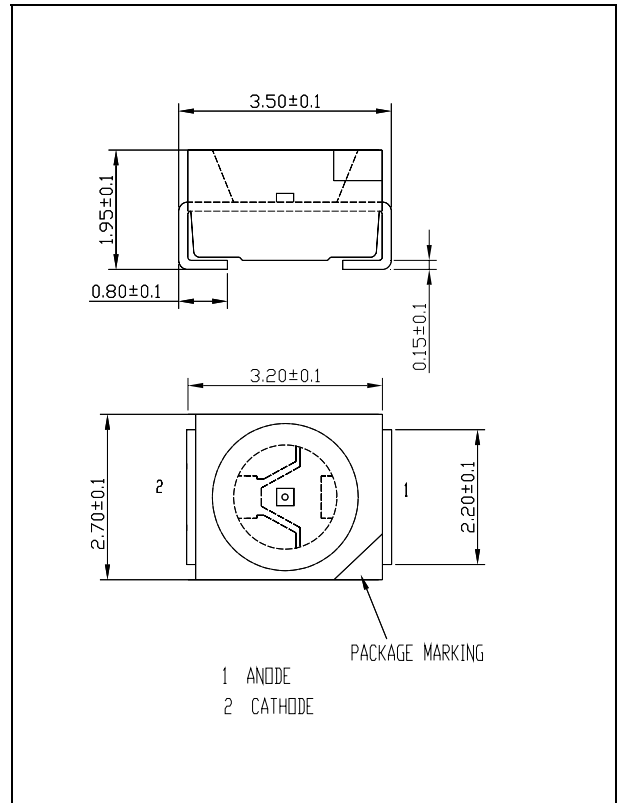

*pulse width <=0.1msec duty <=1/10 ** Rth test condition: Mounted on PC Board FR 4(pad size>=16mm²)

Typical Electrical & Optical Characteristics (Ta = 25°C)

Items	Symbol	Condition	Min.	Typ.	Max.	Unit
Forward Voltage	V _F	I _F = 20mA	---	2.1	2.6	V
Reverse Current	I _R	V _R = 5V	---	---	10	μA
Luminous Intensity	I _v	I _F = 20mA	355	600	---	mcd
Dominant Wavelength	λ _D	I _F = 20mA	584	591	596	nm
50% Power Angle	2 θ _½	I _F = 20mA	---	120	---	deg

Document	SPE/LM1-UYL1-01-N1-MT
Rev. No.	00


Standard bins for LM1-UYL1-01-N1-MT (I_F = 20mA):

Lamps are sorted to Luminous Intensity –I_V & Dominant Wavelength – λ_D bins shown.

Orders for LM1-UYL1-01-N1-MT may be filled with any or all bins contained as below.

All Luminous Intensity –I_V & Dominant Wavelength – λ_D values shown and specified are at I_F=20mA.

*** T2+**

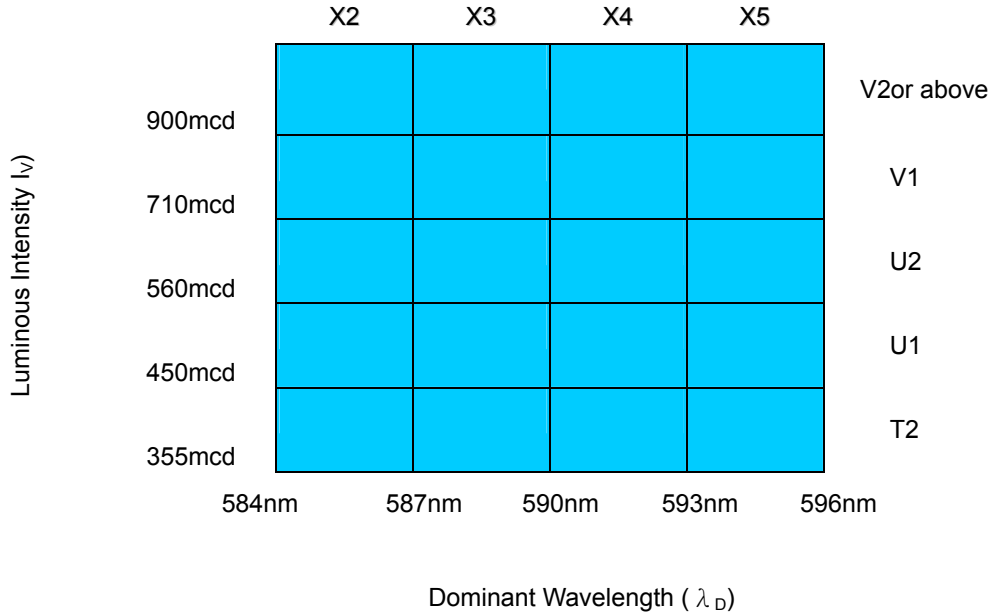

* T2+ indicates Luminous Intensity is at T2 bin or above.

Forward Voltage (V_F)

Rank	V1	V2	V3	V4	V5
Voltage	1.6-1.8V	1.8-2.0V	2.0-2.2V	2.2-2.4	2.4-2.6V

Important Notes:

- 1) All ranks will be included per delivery, rank ratio will be based on Dices distribution.
- 2) Tolerance of measurement of luminous intensity is ±10%
- 3) Tolerance of measurement of dominant wavelength is ±1nm.
- 4) Tolerance of measurement of Vf is ±0.05 V.
- 5) Packaging methods are available for selection, please refer to PACKAGING STANDARD.
- #The notice is only apply quantity not enough for full reel.
- 6) Please refer to LED LAMP RELIABILITY TEST STANDARD for reliability test conditions.
- 7) Please refer to APPLICATION NOTES for Application.

Document	SPE/LM1-UYL1-01-N1-MT
Rev. No.	00

Graphs

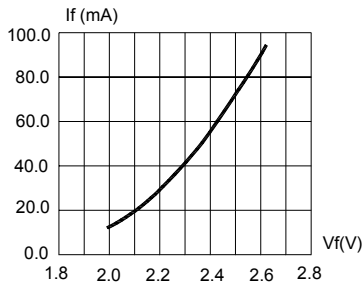


FIG.1 FORWARD CURRENT VS. FORWARD VOLTAGE.

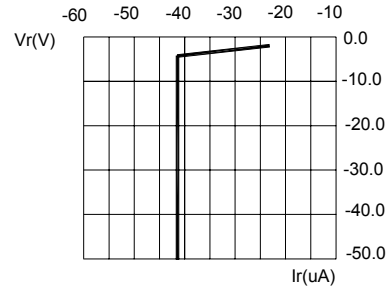


FIG.2 REVERSE CURRENT VS. REVERSE VOLTAGE.

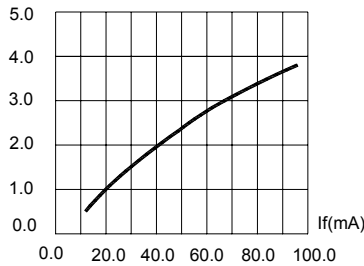


FIG.3 RELATIVE LUMINOUS INTENSITY VS. FORWARD CURRENT.

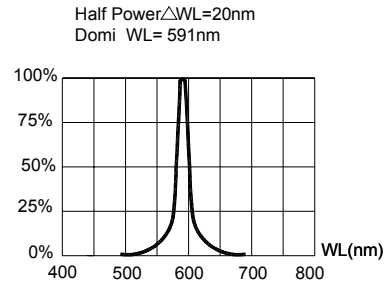


FIG.4 RELATIVE LUMINOUS INTENSITY VS. WAVELENGTH.

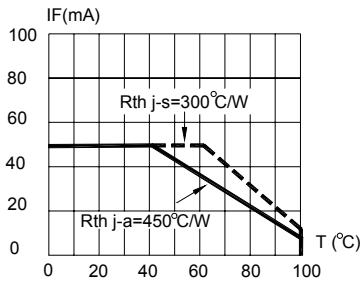


FIG.5 MAXIMUM FORWARD DC CURRENT VS TEMPERATURE. DERATING BASED ON $T_{jmax}=110^{\circ}\text{C}$

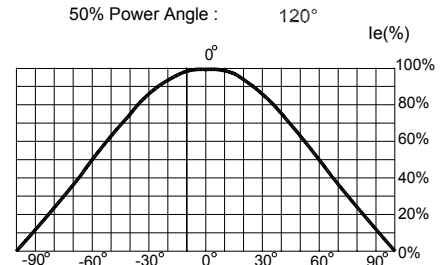


FIG.6 FAR FIELD PATTERN.

Items	Signatures	Date	Revision History		
Prepared by	LiuYin	2007-10-08	Rev.No	Date	Change Description
Checked by	WangXuan	2007-10-08			
Approved by	DavidLiu	2007-10-08			
FCN#	FCN20070				

Data is subject to change without prior notice.

Copyright©2002 Cotco International Ltd.