



UNISONIC TECHNOLOGIES CO., LTD

## LM317L

LINEAR INTEGRATED CIRCUIT


LOW CURRENT 1.25V TO  
37V ADJUSTABLE VOLTAGE  
REGULATOR

### ■ DESCRIPTION

The UTC **LM317L** is a monolithic integrated circuit, designed to supply 100mA of output current with voltage adjustable from 1.25V ~ 37V.

### ■ FEATURES

- \*Output voltage adjustable from 1.25V ~ 37V.
- \*Output current in excess of 100mA
- \*Internal thermal overload protection
- \*Internal short circuit current limiting
- \*Output transistor safe area compensation

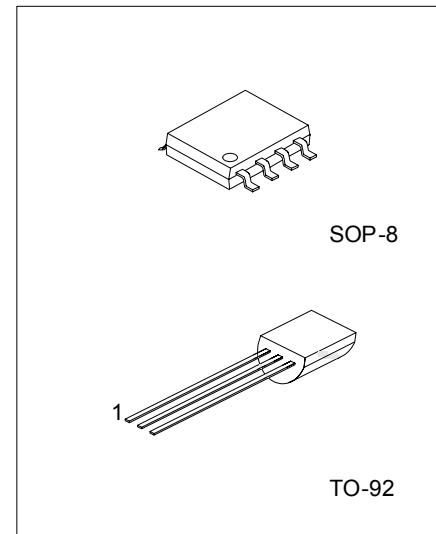

\*Pb-free plating product number: LM317LK

### ■ ORDERING INFORMATION

Ordering Number		Package	Pin Assignment								Packing
Normal	Lead Free Plating		1	2	3	4	5	6	7	8	
LM317L-T92-B	LM317LK-T92-B	TO-92	ADJ	O	I	-	-	-	-	-	Tape Box
LM317L-T92-K	LM317LK-T92-K	TO-92	ADJ	O	I	-	-	-	-	-	Bulk
LM317L-S08-R	LM317LK-S08-R	SOP-8	I	O	O	ADJ	N	O	O	N	Tape Reel
LM317L-S08-T	LM317LK-S08-T	SOP-8	I	O	O	ADJ	N	O	O	N	Tube


Note: Pin Assignment: I:V<sub>IN</sub> O:V<sub>OUT</sub> N: No Connection

<p>LM317LK-T92-B</p> <p>(1)Packing Type (2)Package Type (3)Lead Plating</p>	<p>(1) B: Tape Box, K: Bulk, R: Tape Reel, T: Tube (2) T92: TO-92, S08: SOP-8 (3) K: Lead Free Plating, Blank: Pb/Sn</p>
---	--

# LM317L

## LINEAR INTEGRATED CIRCUIT

### ■ BLOCK DIAGRAM

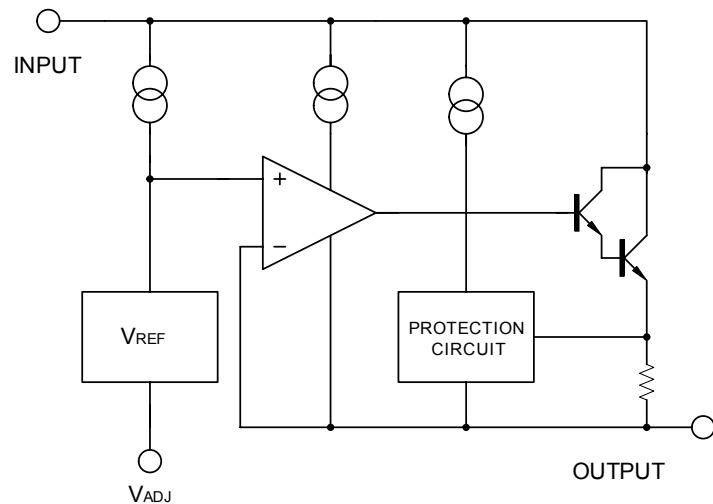

■ ABSOLUTE MAXIMUM RATINGS

PARAMETER	SYMBOL	RATING	UNIT
Input-Output Differential Voltage	$V_{IN}-V_{OUT}$	40	V
Power Dissipation	$P_D$	Internally Limited	
Junction Temperature	$T_J$	+125	°C
Operating Junction Temperature	$T_{OPR}$	0 ~ +125	°C
Storage Temperature Range	$T_{STR}$	-40 ~ +150	°C

Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged.

Absolute maximum ratings are stress ratings only and functional device operation is not implied.

■ ELECTRICAL CHARACTERISTICS

( $V_{IN}-V_{OUT}=5V$ ,  $I_{OUT}=40mA$ ,  $T_a=25^\circ C$ , unless otherwise specified.)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Line Regulation	$\Delta V_{OUT}/V_{OUT}$	3V $V_{IN}-V_{OUT}$ 40V, $I_{LOAD}<20mA$		0.01	0.04	%/V
Load Regulation	$\Delta V_{OUT}$	5mA $I_{OUT}$ 100mA	$V_{OUT}$ 5V	5	25	mV
			$V_{OUT}$ 5V	0.1	0.5	%
Adjustable Pin Current	$I_{ADJ}$			50	100	$\mu A$
Adjustable Pin Current Change	$\Delta I_{ADJ}$	3V $V_{IN}-V_{OUT}$ 40V, 5mA $I_{OUT}$ 100mA, $P_D < 625mW$		0.2	5	$\mu A$
Reference Voltage	$V_{REF}$	3V $V_{IN}-V_{OUT}$ 40V, 5mA $I_{OUT}$ 100mA, $P_D < 625mW$	1.20	1.25	1.30	V
Temperature Stability		$T_{MIN}$ $T_J$ $T_{MAX}$		0.7		%/ $V_{OUT}$
Minimum Load Current for Regulation	$I_{L(MIN)}$	$V_{IN}-V_{OUT}=40V$		3.5	10	mA
Maximum Output Current	$I_{O(MAX)}$	$V_{IN}-V_{OUT}=40V$ , $P_D = 625mW$		50		mA
RMS Noise vs. %of $V_{OUT}$	$eN$	$10Hz$ f $10KHz$		0.003	0.01	%/ $V_{OUT}$
Ripple Rejection	RR	$V_{OUT}=10V$ , f=120Hz,	$C_{ADJ}=0$	65		dB
			$C_{ADJ}=10\mu F$	66	80	dB

Note:  $C_{ADJ}$  is connected between Adjust pin and Ground.



UNISONIC TECHNOLOGIES CO., LTD

[www.unisonic.com.tw](http://www.unisonic.com.tw)

## ■ APPLICATION CIRCUITS

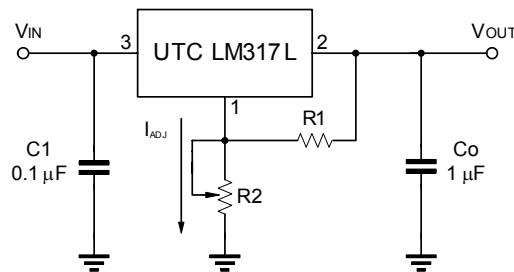


Fig.1 Programmable voltage regulator

$$V_{OUT} = 1.25V * (1 + R2/R1) + I_{ADJ} * R2$$

C1 is required when regulator is located an appreciated distance from power supply . Co is needed to improve transient response .

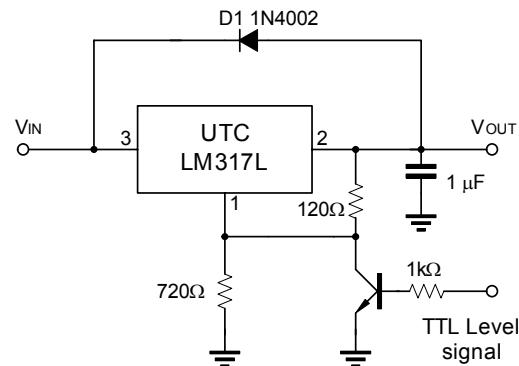


Fig.2 Regulator with On-off control


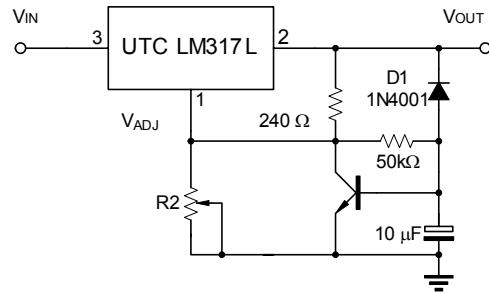


Fig.3 Soft Start Application

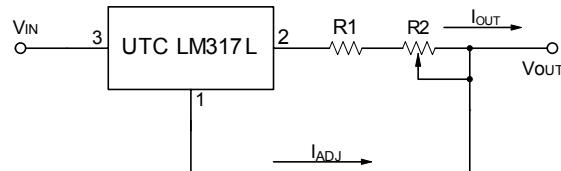

$$I_{O(MAX)} = \left( \frac{V_{REF}}{R1} \right) + I_{ADJ} = \frac{1.25V}{R1}$$

$$I_{O(MIN)} = \left( \frac{V_{REF}}{R1+R2} \right) + I_{ADJ} = \frac{1.25V}{R1+R2}$$

$$5mA < I_{OUT} < 100mA$$

Fig.4 Constant Current Application

## ■ TYPICAL CHARACTERISTICS

Fig.1 Load Regulation vs . temperature

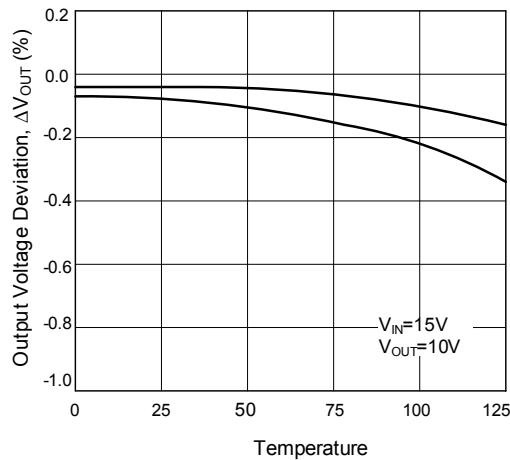


Fig.2 Adjustment Current vs. Temperature

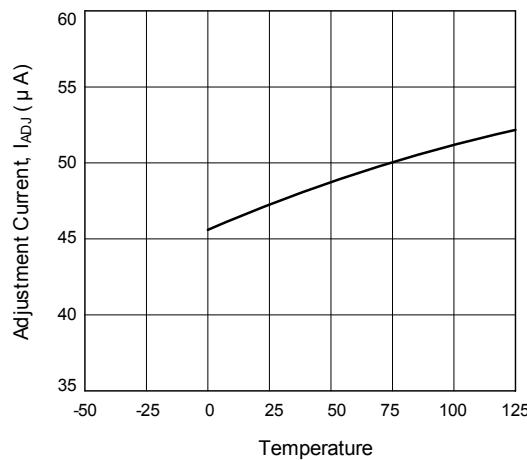


Fig. 3 Current Limit


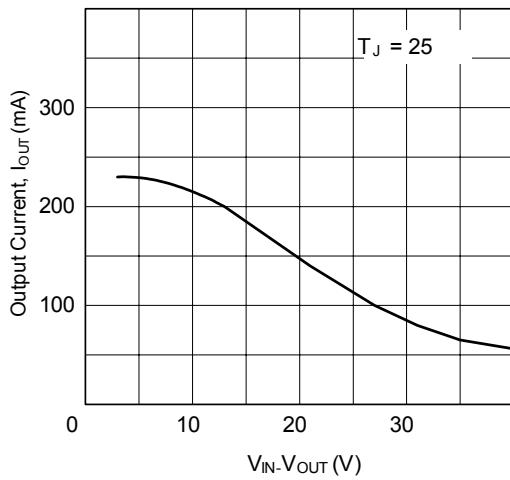


Fig. 4 Minimum Operating Current



UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.

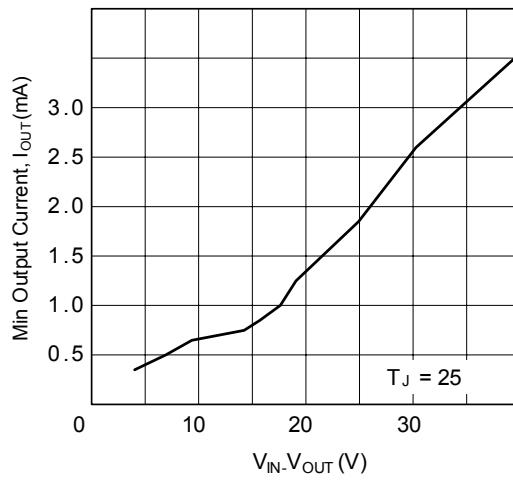

UNISONIC TECHNOLOGIES CO., LTD  
[www.unisonic.com.tw](http://www.unisonic.com.tw)