

# M/A-COM Three-Way In-Phase Power Divider 25 - 1000 MHz

## Features

- Space Qualified version of DS-323
- Designed to meet the Stringent Reliability Standards of Space Hardware
- 50 Ohms Nominal Impedance
- 35 dB Midband Isolation
- 1.2:1 Input VSWR

## Description


M/A-COM's PD20-0010-S is a Three-Way Power Divider designed to operate over a frequency of 25 - 1000 MHz.

## Absolute Maximum Ratings<sup>1</sup>

Parameter	Absolute Maximum
Max. Input Power	1 Watt
Operating Temperature	-30°C to +85°C
Storage Temperature	-65°C to +125°C

1. Operation of this device above any one of these parameters may cause permanent damage.

## FP-3

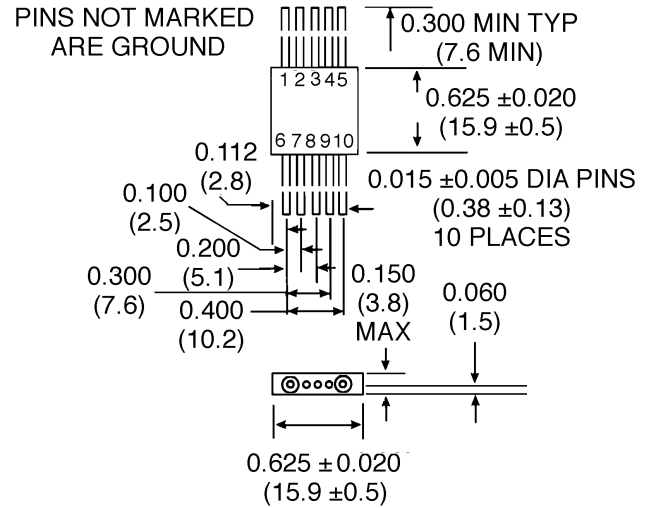

Dimensions in ( ) are in mm.

Unless Otherwise Noted: .xxx = ±0.010 (.xx = ±0.25)

.xx = ±0.02 (.x = ±0.5)

WEIGHT (APPROX.): 0.12 OUNCES 3.4 GRAMS

## Electrical Specifications, T<sub>A</sub> = +25°C

Parameter	Test Conditions	Frequency	Units	Min.	Max.
Insertion Loss	-	25-200 MHz	dB	-	0.5
		200-1000 MHz	dB	-	1.0
Isolation	-	25-49 MHz	dB	15	-
		50-199 MHz	dB	22	-
		200-1000 MHz	dB	24	-
Amplitude Balance	-	25-200 MHz	dB	-	0.25
		201-1000 MHz	dB	-	0.4
Phase Balance	-	25-200 MHz	-	-	2°
		201-1000 MHz	-	-	4°
VSWR	Input	25-1000 MHz	-	-	1.5
		25-49 MHz	-	-	2.2
		50-199 MHz	-	-	1.7:1
		200-1000 MHz	-	-	1.5:1

Specifications subject to change without notice.

V.2.0

- North America: Tel. (800) 366-2266, Fax (800) 618-8883
- Asia/Pacific: Tel.+81-44-844-8296, Fax +81-44-844-8298
- Europe: Tel. +44 (1344) 869 595, Fax+44 (1344) 300 020

tyco / Electronics

M/A-COM

Visit [www.macom.com](http://www.macom.com) for additional data sheets and product information.