

## Block-type 100mW High Power Laser Diode

### Description

The SLD301B is a high power laser diode mounted on a  $3 \times 3 \times 5\text{mm}$  Copper block.

It is ideal for applications which require a minimal distance between the laser facet and external optical parts.

### Features

- Compact size       $3 \times 3 \times 5\text{mm}$  block
- High power output     $P_o = 100\text{mW}$
- Hole for thermistor

### Applications

- Solid state laser excitation
- Medical use

### Structure

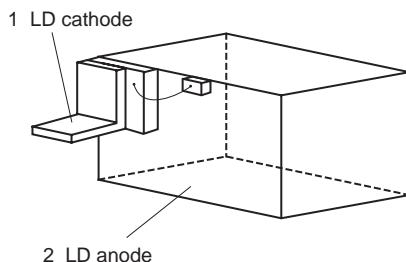
GaAlAs double hetero-type laser diode

### Absolute Maximum Ratings ( $T_c = 25^\circ\text{C}$ )

• Optical power output	$P_o$	100	mW
• Recommended optical power output	$P_o$	90	mW
• Reverse voltage	$V_R$	LD 2	V
• Operating temperature	$T_{opr}$	-10 to +50	°C
• Storage temperature	$T_{stg}$	-40 to +85	°C

### Pin Configuration

No.	Function
1	LD cathode
2	LD anode



Sony reserves the right to change products and specifications without prior notice. This information does not convey any license by any implication or otherwise under any patents or other right. Application circuits shown, if any, are typical examples illustrating the operation of the devices. Sony cannot assume responsibility for any problems arising out of the use of these circuits.

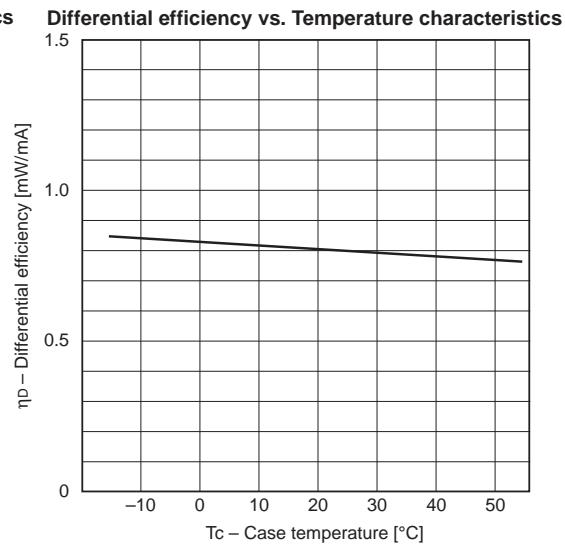
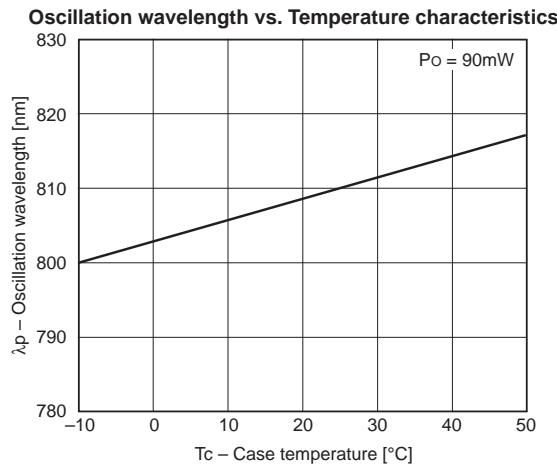
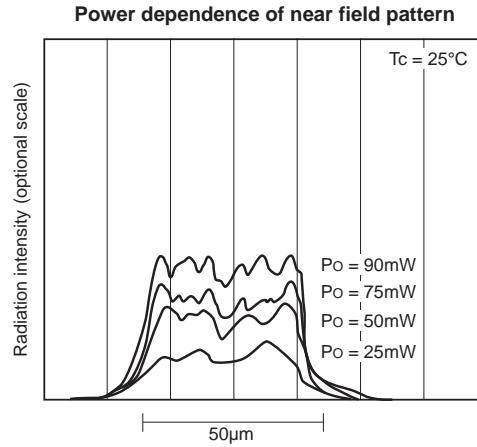
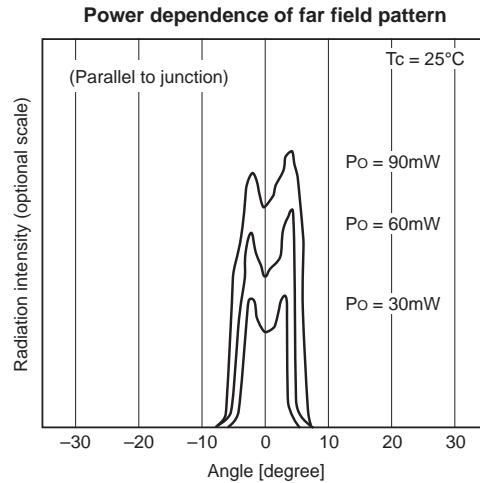
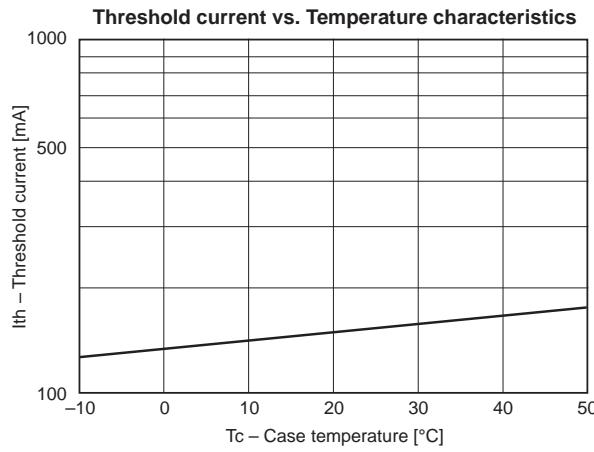
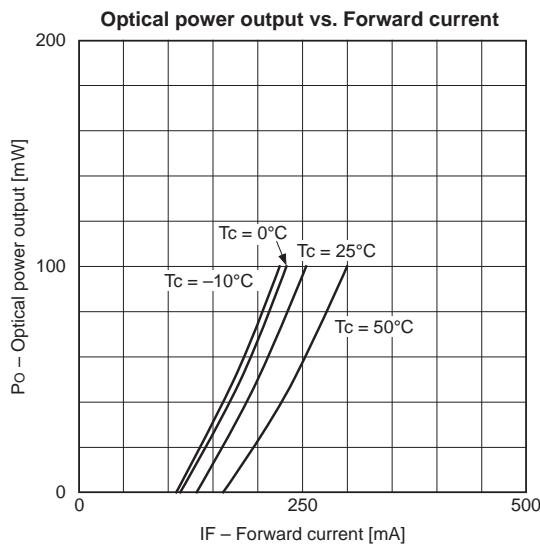
## Electrical and Optical Characteristics

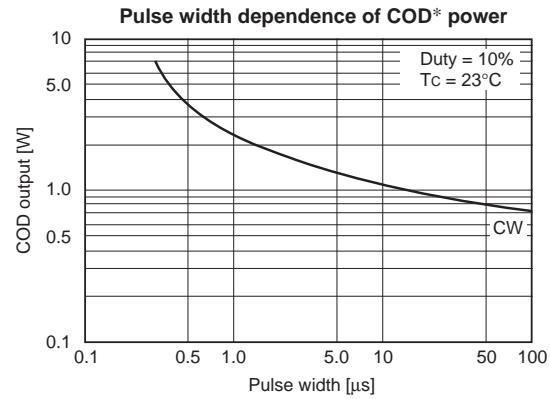
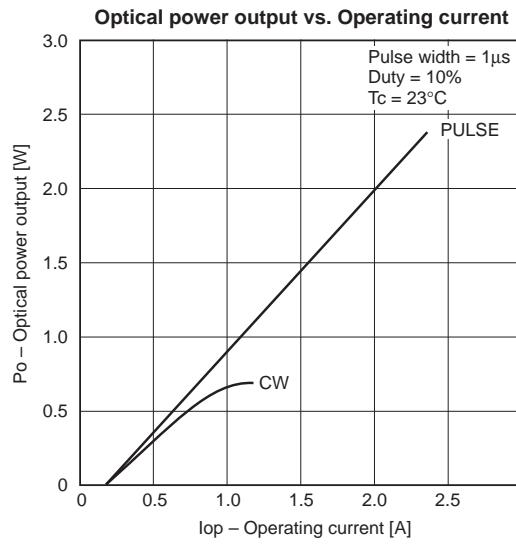
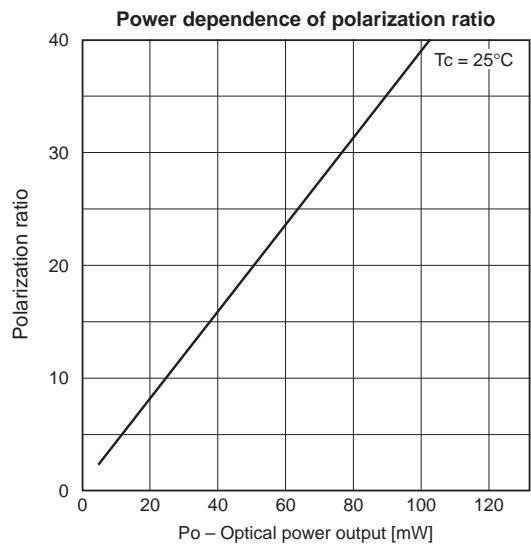
(Tc = 25°C)

Item	Symbol	Conditions	Min.	Typ.	Max.	Unit
Threshold current	Ith			150	200	mA
Operating current	Iop	Po = 90mW		300	400	mA
Operating voltage	Vop	Po = 90mW		1.9	3.0	V
Wavelength	$\lambda_p$	Po = 90mW	770		840	nm
Radiation angle (F. W. H. M.* )	Perpendicular to junction $\theta \perp$	Po = 90mW		28	40	degree
	Parallel to junction $\theta //$			12	17	
Positional accuracy	Position $\Delta X$	Po = 90mW			$\pm 300$	$\mu\text{m}$
					$\pm 100$	
	Angle $\Delta\phi \perp$				$\pm 3$	degree
Differential efficiency	$\eta_D$	Po = 90mW	0.5	0.7		mW/mA

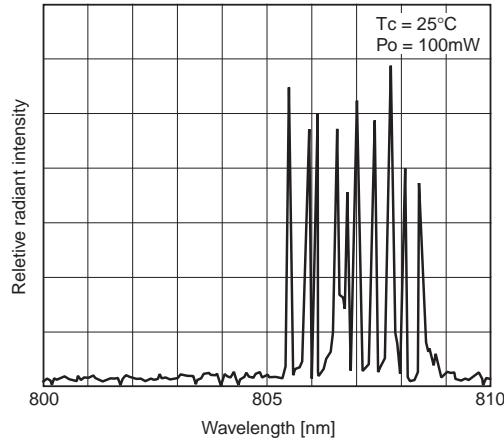
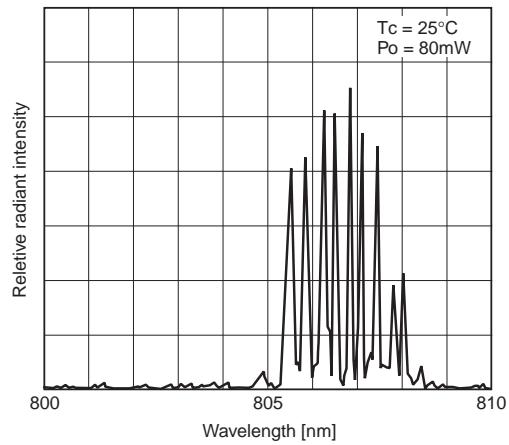
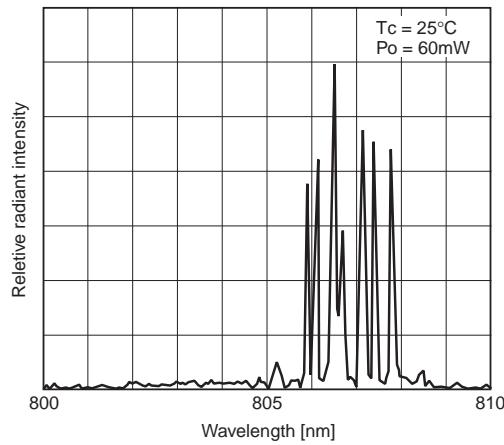
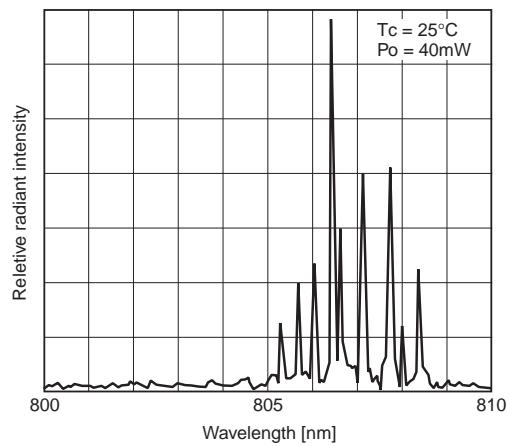
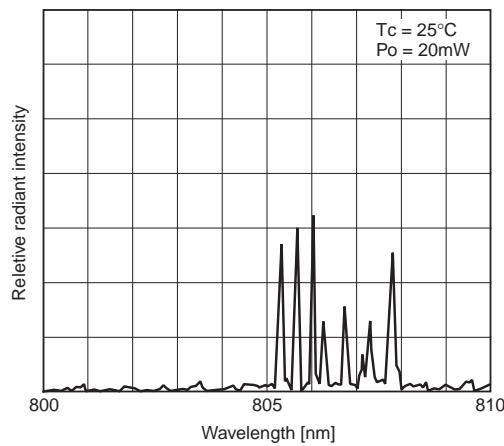
\* F. W. H. M. : Full Width at Half Maximum

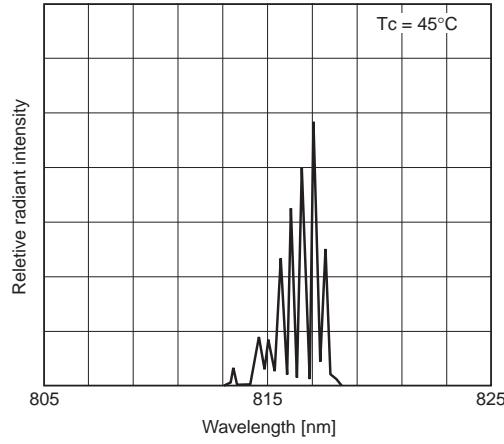
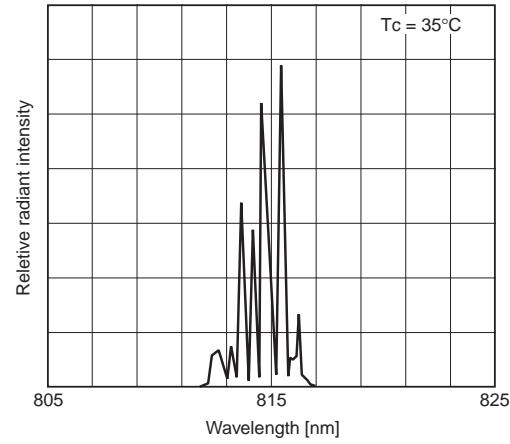
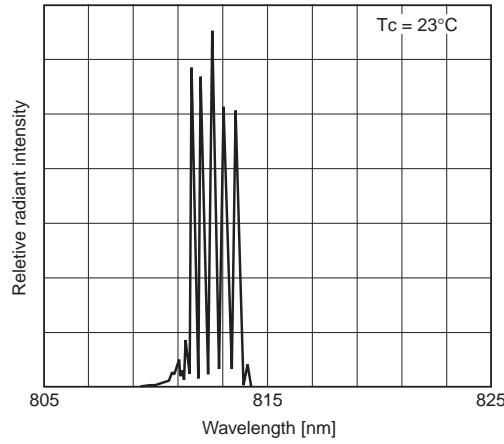
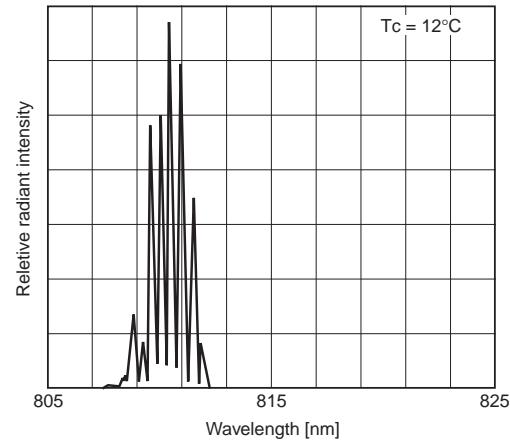
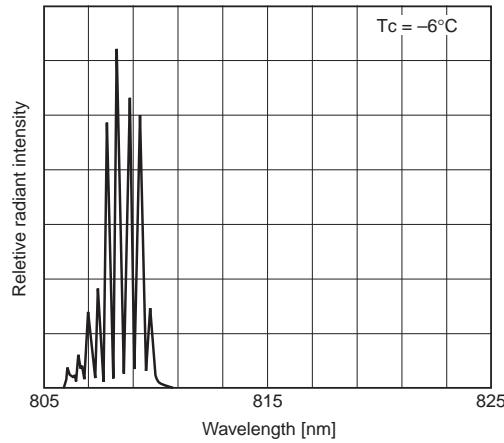
### Example of Representative Characteristics





\* COD (Catastrophic Optical Damage)

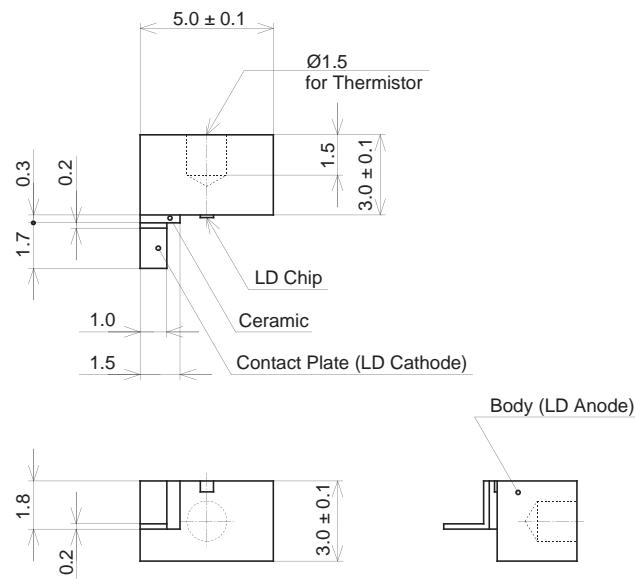
**Power Dependence of Wavelength**

**Temperature Dependence of Wavelength ( $P_o = 90\text{mW}$ )**

**Package Outline**

Unit: mm

M - 261

**PACKAGE STRUCTURE**

SONY CODE	M-261
EIAJ CODE	_____
JEDEC CODE	_____

PACKAGE WEIGHT	1g
----------------	----