

2SA1791

Silicon PNP epitaxial planer type

For high-frequency amplification


Complementary to 2SC4656

Features

- High transition frequency f_T .
- Small collector output capacitance C_{ob} .
- SS-Mini type package, allowing downsizing of the equipment and automatic insertion through the tape packing and the magazine packing.

Absolute Maximum Ratings ($T_a=25^\circ\text{C}$)

Parameter	Symbol	Ratings	Unit
Collector to base voltage	V_{CBO}	-50	V
Collector to emitter voltage	V_{CEO}	-50	V
Emitter to base voltage	V_{EBO}	-5	V
Collector current	I_C	-50	mA
Collector power dissipation	P_C	125	mW
Junction temperature	T_j	125	$^\circ\text{C}$
Storage temperature	T_{stg}	-55 ~ +125	$^\circ\text{C}$

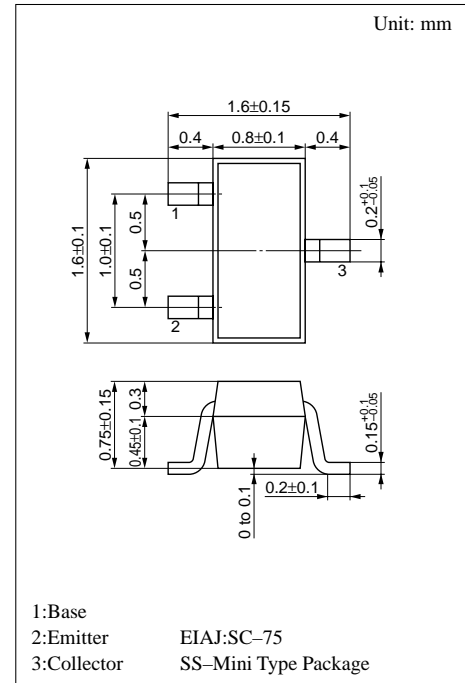

Marking symbol : AL

Electrical Characteristics ($T_a=25^\circ\text{C}$)

Parameter	Symbol	Conditions	min	typ	max	Unit
Collector cutoff current	I_{CBO}	$V_{CB} = -10\text{V}, I_E = 0$			-0.1	μA
	I_{CEO}	$V_{CE} = -10\text{V}, I_B = 0$			-100	μA
Collector to base voltage	V_{CBO}	$I_C = -10\mu\text{A}, I_E = 0$	-50			V
Collector to emitter voltage	V_{CEO}	$I_C = -1\text{mA}, I_B = 0$	-50			V
Emitter to base voltage	V_{EBO}	$I_E = -10\mu\text{A}, I_C = 0$	-5			V
Forward current transfer ratio	h_{FE}	$V_{CE} = -10\text{V}, I_C = -2\text{mA}$	200		500	
Collector to emitter saturation voltage	$V_{CE(sat)}$	$I_C = -10\text{mA}, I_B = -1\text{mA}$		-0.1	-0.3	V
Transition frequency	f_T	$V_{CB} = -10\text{V}, I_E = 2\text{mA}, f = 200\text{MHz}$		250		MHz
Collector output capacitance	C_{ob}	$V_{CB} = -10\text{V}, I_E = 0, f = 1\text{MHz}$		1.5		pF

* h_{FE} Rank classification

Rank	Q	R
h_{FE}	200 ~ 400	250 ~ 500
Marking Symbol	ALQ	ALR

