

# 2SC4468

Silicon NPN Triple Diffused Planar Transistor (Complement to type 2SA1695)

Application : Audio and General Purpose

**Absolute maximum ratings** (Ta=25°C)

| Symbol           | 2SC4468                   | Unit |
|------------------|---------------------------|------|
| V <sub>CB0</sub> | 200                       | V    |
| V <sub>CEO</sub> | 140                       | V    |
| V <sub>EB0</sub> | 6                         | V    |
| I <sub>C</sub>   | 10                        | A    |
| I <sub>B</sub>   | 4                         | A    |
| P <sub>C</sub>   | 100(T <sub>C</sub> =25°C) | W    |
| T <sub>J</sub>   | 150                       | °C   |
| T <sub>stg</sub> | -55 to +150               | °C   |

**Electrical Characteristics** (Ta=25°C)


| Symbol               | Conditions                                  | 2SC4468 | Unit |
|----------------------|---|---------|------|
| I <sub>CB0</sub>     | V <sub>CB</sub> =200V                       | 10max   | μA   |
| I <sub>EB0</sub>     | V <sub>EB</sub> =6V                         | 10max   | μA   |
| V(BR)CEO             | I <sub>C</sub> =50mA                        | 140min  | V    |
| h <sub>FE</sub>      | V <sub>CE</sub> =4V, I <sub>C</sub> =3A     | 50min*  |      |
| V <sub>CE(sat)</sub> | I <sub>C</sub> =5A, I <sub>B</sub> =0.5A    | 0.5max  | V    |
| f <sub>r</sub>       | V <sub>CE</sub> =12V, I <sub>E</sub> =-0.5A | 20typ   | MHz  |
| C <sub>OB</sub>      | V <sub>CB</sub> =10V, f=1MHz                | 250typ  | pF   |

\*h<sub>FE</sub> Rank  $\bar{O}$ (50to100), P(70to140), Y(90to180)


**Typical Switching Characteristics (Common Emitter)**

| V <sub>CC</sub> (V) | R <sub>L</sub> (Ω) | I <sub>C</sub> (A) | V <sub>BB1</sub> (V) | V <sub>BB2</sub> (V) | I <sub>B1</sub> (A) | I <sub>B2</sub> (A) | t <sub>on</sub> (μs) | t <sub>stg</sub> (μs) | t <sub>f</sub> (μs) |
|---------------------|--------------------|--------------------|----------------------|----------------------|---------------------|---------------------|----------------------|-----------------------|---------------------|
| 60                  | 12                 | 5                  | 10                   | -5                   | 0.5                 | -0.5                | 0.24typ              | 4.32typ               | 0.40typ             |


**External Dimensions MT-100(TO3P)**

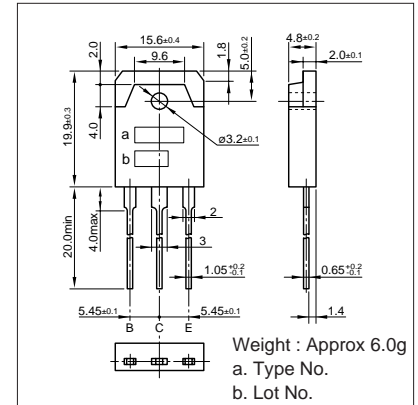


**I<sub>C</sub>-V<sub>CE</sub> Characteristics (Typical)**

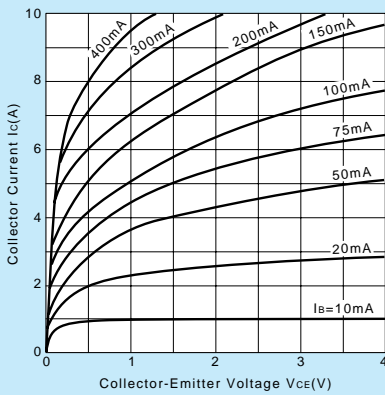


**V<sub>CE(sat)</sub>-I<sub>B</sub> Characteristics (Typical)**

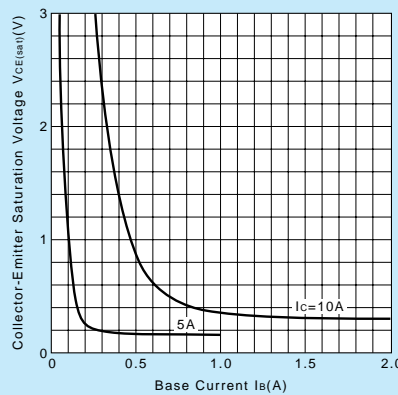


**I<sub>C</sub>-V<sub>BE</sub> Temperature Characteristics (Typical)**

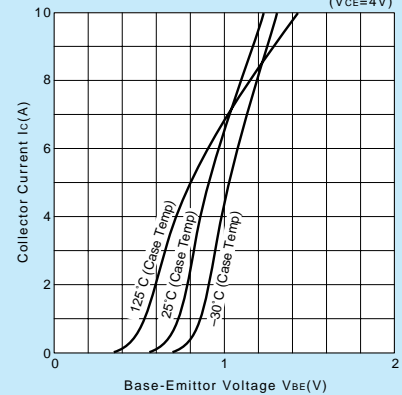


**h<sub>FE</sub>-I<sub>C</sub> Characteristics (Typical)**

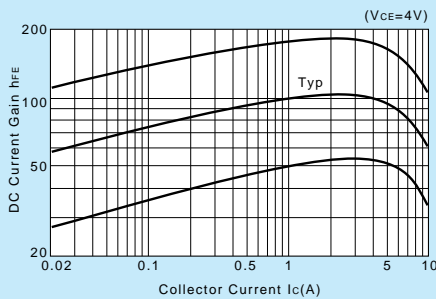


**h<sub>FE</sub>-I<sub>C</sub> Temperature Characteristics (Typical)**

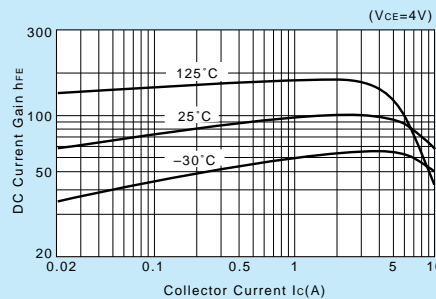


**θ<sub>J-a</sub>-t Characteristics**

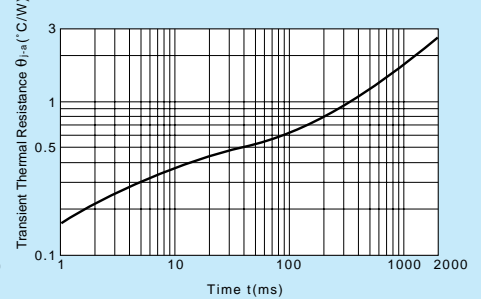

**f<sub>T</sub>-I<sub>E</sub> Characteristics (Typical)**

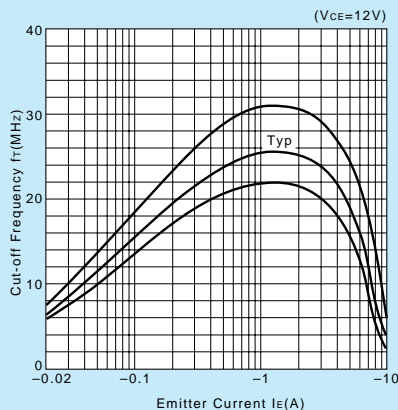

**Safe Operating Area (Single Pulse)**

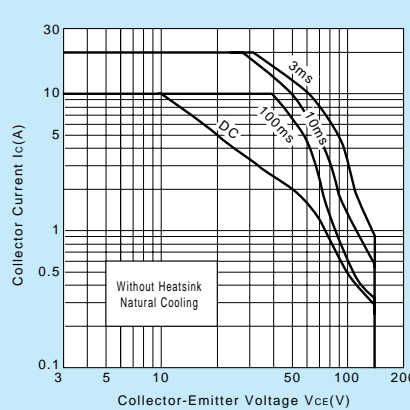

**P<sub>C</sub>-T<sub>a</sub> Derating**

