


Specifications


Parameter	Unit	Minimum	Typical	Maximum
Center Frequency	MHz	69.95	70	70.05
Insertion Loss	dB		22	23.5
1dB Bandwidth	MHz		9.25	
3 dB Bandwidth	MHz	9.5	9.52	
40dB Bandwidth	MHz		10.73	10.9
Passband Variation	dB		0.8	1
Group Delay Variation($f_0 \pm 4.4\text{MHz}$)	nsec		80	100
Absolute Delay	usec		2.44	
Ultimate Rejection	dB	48	50	
Substrate Material			YZ	
Ambient Temperature	°C		25	
Package Size		24.64mmx8.99mmx1.75mm		

Notes:


1. All specifications are based on the test circuit shown
2. In production, devices will be tested at room temperature to a guardbanded specification to ensure electrical compliance over temperature
3. Electrical margin has been built into the design to account for the variations due to temperature drift and manufacturing tolerances
4. This is the optimum impedance in order to achieve the performance show


Matching Configuration

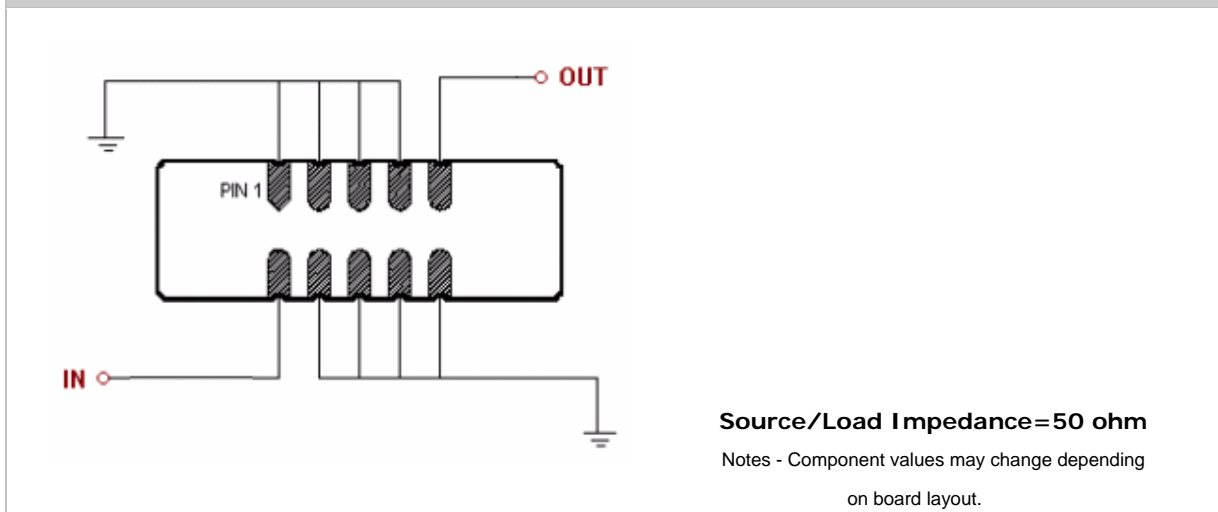


	SIPAT Co., Ltd. (CETC No. 26 Research Institute) Nanping Huayuan Road No. 14 Chongqing, China, 400060	Part Number	LBN07093	
		Rev. Date	2005-4-14	
		Rev.	1.0	Page 1/3


Package Dimension

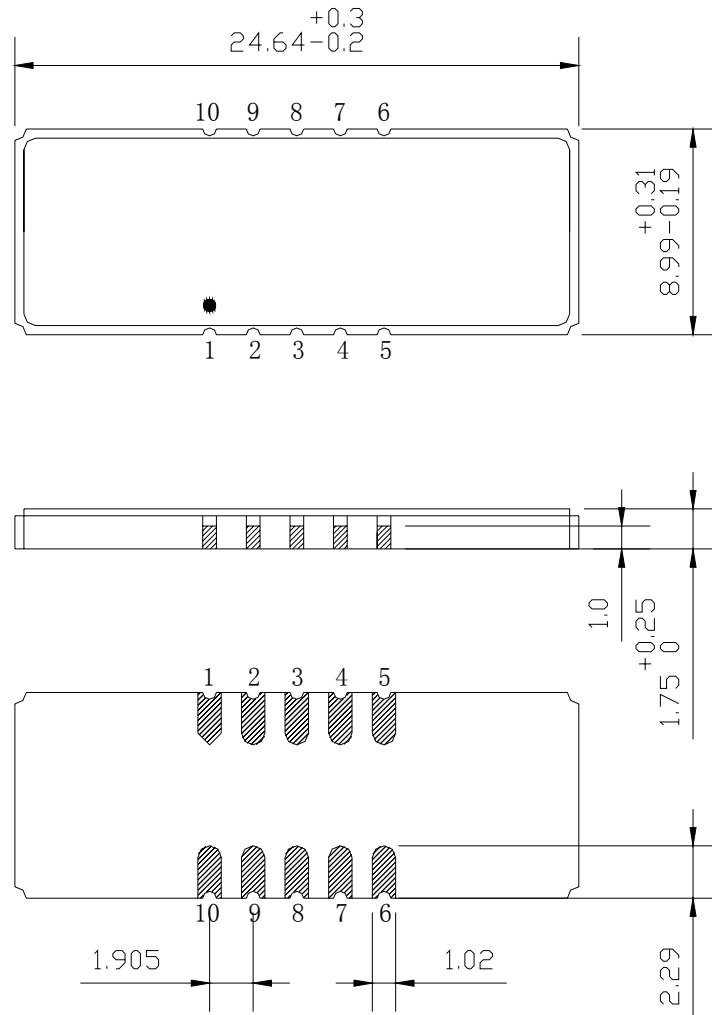

	SIPAT Co., Ltd. (CETC No. 26 Research Institute) Nanping Huayuan Road No. 14 Chongqing, China, 400060	Part Number	LBN07093	
		Rev. Date	2005-4-14	
		Rev.	1.0	Page

Typical Performance

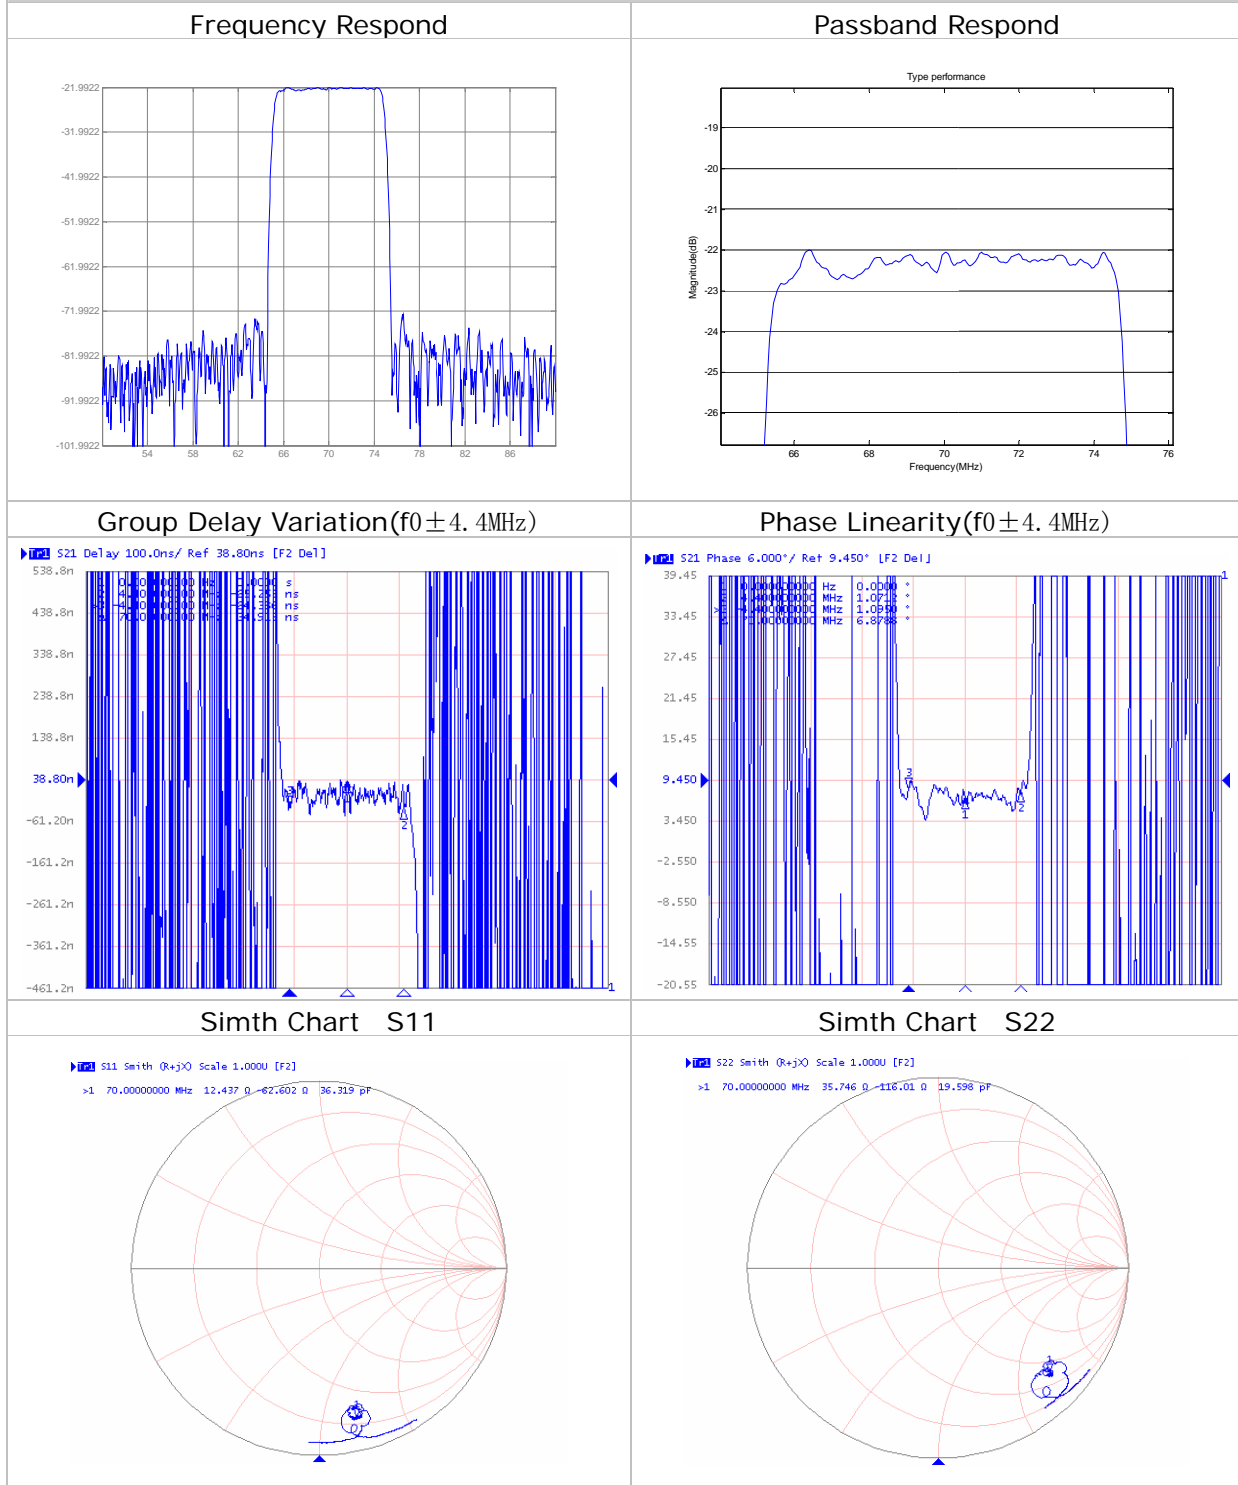

	SIPAT Co., Ltd. (CETC No. 26 Research Institute) Nanping Huayuan Road No. 14 Chongqing, China, 400060	Part Number	LBN07093	
		Rev. Date	2005-4-14	
		Rev.	1.0	Page