

# 2.5V SERIES - Lead terminal




## FEATURES

### EDLC (Electric Double Layer Capacitor)

- High Power Density (Low ESR)
- Over 500,000 cycle life (semi-permanent)
- Short-term Peak Power assist applications
- RoHS compliant

## Drawing

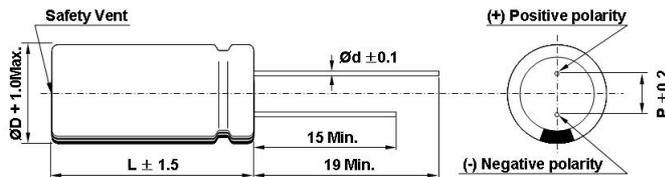

D	8	10	16, 18
d	0.6		0.8
P	4	5.5	8

## SPECIFICATION

ITEM	CHARACTERISTICS
Product series	EDLC
Rated Voltage ( $V_R$ )	2.5 V
Operating Temperature	-25 ~ +70 °C
Capacitance Tolerance	-10 ~ +30%
High Temperature Load Life	After 1,000 hours at $V_R$ loaded under +70 °C, capacitors meet the following criteria.
	Capacitance Change $\leq$ 30% of initial value
	ESR Change $\leq$ 2 times of specified value
85 °C Higher Temperature	Max. working voltage at 2.1V
Temperature Characteristics	Measure at -25, +25, +70 °C
	$\Delta C \leq$ 30% of initial value
	ESR $\leq$ 2 times of specified value
Cycle Life Characteristics	Cycle Over 500,000
	$\Delta C \leq$ 30% of initial value
	ESR $\leq$ 2 times of specified value
	Method Cycle of Charge/discharge from $V_R$ to $1/2V_R$
Shelf Life	After 1,000 hours storage at +70 °C without load, capacitors meet the criteria of high temp. load life above.

Part Number	Rated Voltage (V)	Capacitance (F)	ESR (mΩ)		Max. Current (A)	Leakage Current (mA, 72hr)	Size (mm) D × L	Weight (g)	Volume (ml)	Energy Density (Wh/L)
			AC(1kHz)	DC						
VEC 2R5 155 QG	2.5	1.5	120	180	1.4	0.003	08×20	1.5	1.0	1.3
VEC 2R5 305 QG		3	140	210	2.3	0.008	08×20	1.7	1.0	2.6
VEC 2R5 405 QG		4	75	110	3.4	0.009	10×25	2.7	2.0	1.7
VEC 2R5 505 QA		5	120	180	3.2	0.012	08×25	2.1	1.3	3.5
VEC 2R5 505 QG		5	110	165	3.4	0.012	10×20	2.2	1.6	2.8
VEC 2R5 705 QG		7	80	120	4.7	0.020	10×20	2.5	1.6	3.8
VEC 2R5 106 QD		10	65	95	6.4	0.027	10×25	3.1	2.0	4.4
VEC 2R5 106 QG		10	65	95	6.4	0.027	10×30	3.2	2.4	3.7
VEC 2R5 156 QG		15	60	90	7.9	0.035	13×25	4.5	3.1	4.2
VEC 2R5 256 QG		25	35	55	13.1	0.060	16×25	7.6	5.0	4.3
VEC 2R5 606 QG		60	20	30	26.7	0.120	18×40	13.7	10.2	5.1

\* Max. Current : 1 sec. discharge to  $1/2V_R$

# 2.5V SERIES - Lug terminal




## FEATURES

### EDLC (Electric Double Layer Capacitor)

- High Power Density (Low ESR)
- Over 500,000 cycle life (semi-permanent)
- Short-term Peak Power assist applications

## Drawing

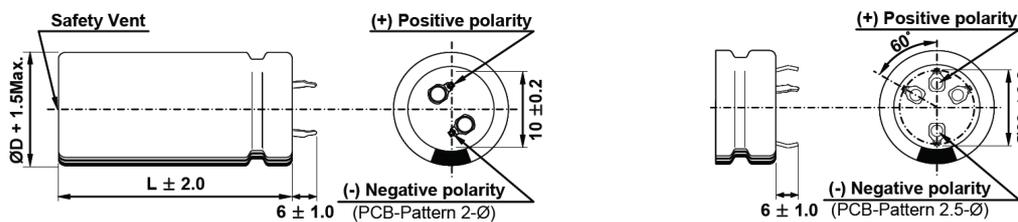

## SPECIFICATION

ITEM	CHARACTERISTICS	
Product series	EDLC	
Rated Voltage ( $V_R$ )	2.5 V	
Operating Temperature	-25 ~ +70 °C	
Capacitance Tolerance	-10 ~ +30%	
High Temperature Load Life	After 1,000 hours at $V_R$ loaded under +70 °C, capacitors meet the following criteria.	
	Capacitance Change	≤ 30% of initial value
	ESR Change	≤ 2 times of specified value
85 °C Higher Temperature	Max. working voltage at 2.1V	
Temperature Characteristics	Measure	at -25, +25, +70 °C
	ΔC	≤ 30% of initial value
	ESR	≤ 2 times of specified value
Cycle Life Characteristics	Cycle	Over 500,000
	ΔC	≤ 30% of initial value
	ESR	≤ 2 times of specified value
	Method	Cycle of Charge/discharge from $V_R$ to $1/2V_R$
Shelf Life	After 1,000 hours storage at +70 °C without load, capacitors meet the criteria of high temp. load life above.	

Part Number	Rated Voltage (V)	Capacitance (F)	ESR (mΩ)		Max. Current (A)	Leakage Current (mA, 72hr)	Size (mm) D × L	Weight (g)	Volume (ml)	Energy Density (Wh/L)
			AC(1kHz)	DC						
VEC 2R5 127 QG	2.5	120	18	25	37.5	0.24	22×45	22.1	17.1	6.1
VEC 2R5 227 QG		220	14	18	55.4	0.40	25×60	37.9	29.4	6.5
VEC 2R5 357 QG		350	6	10	97.2	0.90	35×60	70.6	57.7	5.3

\* Max. Current : 1 sec. discharge to  $1/2V_R$