



DC COMPONENTS CO., LTD.
DISCRETE SEMICONDUCTORS

DMBT8050

TECHNICAL SPECIFICATIONS OF NPN EPITAXIAL PLANAR TRANSISTOR

Description


Designed for general purpose amplifier applications.

Pinning

- 1 = Base
- 2 = Emitter
- 3 = Collector

Absolute Maximum Ratings (T_A=25°C)

Characteristic	Symbol	Rating	Unit
Collector-Base Voltage	V _{CB0}	25	V
Collector-Emitter Voltage	V _{CEO}	20	V
Emitter-Base Voltage	V _{EB0}	5	V
Collector Current	I _C	500	mA
Total Power Dissipation	P _D	225	mW
Junction Temperature	T _J	+150	°C
Storage Temperature	T _{STG}	-55 to +150	°C

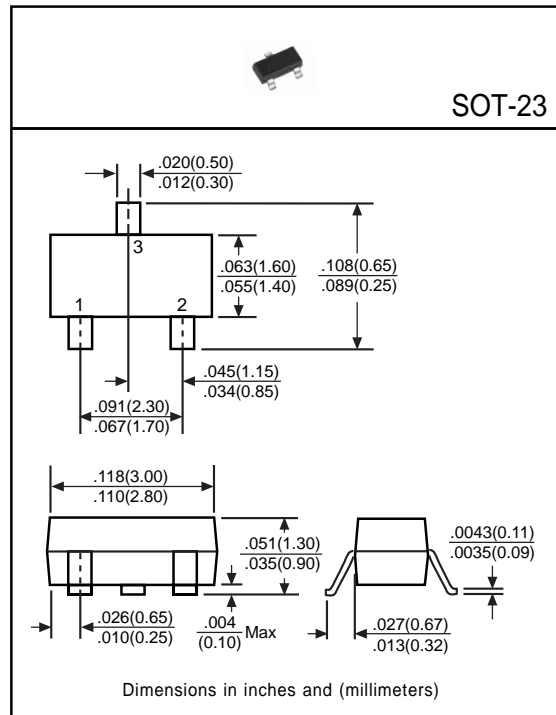

Electrical Characteristics

(Ratings at 25°C ambient temperature unless otherwise specified)

Characteristic	Symbol	Min	Typ	Max	Unit	Test Conditions
Collector-Base Breakdown Voltage	BV _{CB0}	25	-	-	V	I _C =10μA, I _E =0
Collector-Emitter Breakdown Voltage	BV _{CEO}	20	-	-	V	I _C =1mA, I _B =0
Emitter-Base Breakdown Voltage	BV _{EB0}	5	-	-	V	I _E =10μA, I _C =0
Collector Cutoff Current	I _{CB0}	-	-	1	μA	V _{CB} =20V, I _E =0
Collector-Emitter Saturation Voltage ⁽¹⁾	V _{CE(sat)}	-	-	0.6	V	I _C =500mA, I _B =50mA
Base-Emitter Saturation Voltage ⁽¹⁾	V _{BE(sat)}	-	-	1.2	V	I _C =500mA, I _B =50mA
DC Current Gain ⁽¹⁾	h _{FE}	120	-	500	-	I _C =50mA, V _{CE} =1V
Transition Frequency	f _T	150	-	-	MHz	I _C =20mA, V _{CE} =10V, f=100MHz

(1) Pulse Test: Pulse Width ≤ 380μs, Duty Cycle ≤ 2%

Classification of h_{FE}

Rank	C	D	E
Range	120~200	150~350	250~500