



DC COMPONENTS CO., LTD.  
DISCRETE SEMICONDUCTORS

DMBTH10

TECHNICAL SPECIFICATIONS OF NPN EPITAXIAL PLANAR TRANSISTOR

Description


Designed for use in VHF & UHF oscillators and VHF mixer in tuner of a TV receiver.

Pinning

- 1 = Base
- 2 = Emitter
- 3 = Collector

Absolute Maximum Ratings (T<sub>A</sub>=25°C)

Characteristic	Symbol	Rating	Unit
Collector-Base Voltage	V <sub>CB0</sub>	20	V
Collector-Emitter Voltage	V <sub>CEO</sub>	15	V
Emitter-Base Voltage	V <sub>EB0</sub>	3	V
Collector Current	I <sub>C</sub>	50	mA
Total Power Dissipation	P <sub>D</sub>	225	mW
Junction Temperature	T <sub>J</sub>	+150	°C
Storage Temperature	T <sub>STG</sub>	-55 to +150	°C

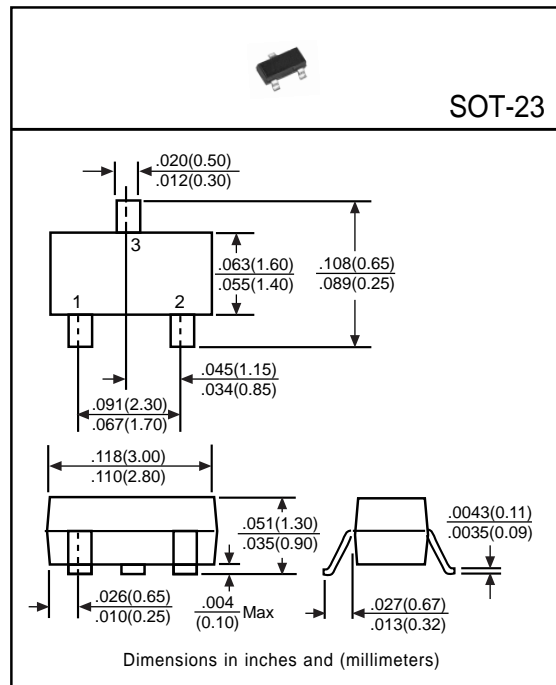

Electrical Characteristics

(Ratings at 25°C ambient temperature unless otherwise specified)

Characteristic	Symbol	Min	Typ	Max	Unit	Test Conditions
Collector-Base Breakdown Voltage	BV <sub>CB0</sub>	20	-	-	V	I <sub>C</sub> =100μA
Collector-Emitter Breakdown Voltage	BV <sub>CEO</sub>	15	-	-	V	I <sub>C</sub> =1mA
Emitter-Base Breakdown Voltage	BV <sub>EB0</sub>	3	-	-	V	I <sub>C</sub> =10μA
Collector Cutoff Current	I <sub>CBO</sub>	-	-	100	nA	V <sub>CB</sub> =20V
Emitter Cutoff Current	I <sub>EB0</sub>	-	-	100	nA	V <sub>EB</sub> =2V
Collector-Emitter Saturation Voltage <sup>(1)</sup>	V <sub>CE(sat)</sub>	-	-	0.5	V	I <sub>C</sub> =4mA, I <sub>B</sub> =0.4mA
Base-Emitter On Voltage	V <sub>BE(on)</sub>	-	-	0.95	V	I <sub>C</sub> =4mA, V <sub>CE</sub> =10V
DC Current Gain <sup>(1)</sup>	h <sub>FE</sub>	60	-	-	-	I <sub>C</sub> =4mA, V <sub>CE</sub> =10V
Transition Frequency	f <sub>T</sub>	650	-	-	MHz	I <sub>C</sub> =4mA, V <sub>CB</sub> =10V, f=100MHz
Output Capacitance	C <sub>ob</sub>	-	-	0.7	pF	V <sub>CB</sub> =10V, f=1MHz

(1) Pulse Test: Pulse Width ≤ 380μs, Duty Cycle ≤ 2%