

2004

**POWER
SUPPLY
CATALOG**

ALL ACOPIAN POWER SUPPLIES ARE MADE IN THE U.S.A.



POWER SUPPLY SELECTION GUIDE (1 of 2)

**Shipped
within
6/9 DAYS**

HIGH VOLTAGE REGULATED, AC-DC & DC-DC

To 30 KV



{ 0-30 kV
1-60 mA
30-60 watts }

MODULAR

Single output 2-5
Mounting Kits (for wall mounting or DIN rail mounting) 37

RACK MOUNTING

Single output 6-7

PAGE

**Shipped
within
3 DAYS**

DC-DC CONVERTERS, REGULATED



{ 5-28 volts out
0.2-2.5 amps
6-15 watts }

MINI ENCAPSULATED

PC Board Mounting

Single and Dual output 16-17
Sockets 11

With Screw Terminals

Single and Dual output 18-19
Mounting Kits (for wall mounting or DIN rail mounting) 19

**Shipped
within
3 DAYS**



{ 1-75 volts
0.02-2.5 amps
0.25-15 watts }

MINI ENCAPSULATED

PC Board Mounting

Single output 8-9
Dual and Triple output 10-11
Sockets 11

With Screw Terminals

Single and Dual output 12-13
Mounting Kits (for wall mounting or DIN rail mounting) 19

**Shipped
within
3 DAYS**



{ 0-150 volts
0.05-3.5 amps
2-38 watts }

NARROW PROFILE

Single output 24-25
Dual output 28
Wide Adjust output 26-27
Mounting Kits (for wall mounting or DIN rail mounting) 37

**Shipped
within
3 DAYS**



{ 0-200 volts
0.1-32 amps
0.6-420 watts }

GOLD BOX

Single output 20-23
Dual output 28-32
Triple output 33
Wide Adjust output 26-27
Adjustable Current Limiting 26-27
Mounting Kits (for wall mounting or DIN rail mounting) 37

**Shipped
within
3 DAYS**



{ 1-200 volts
0.02-5 amps
0.1-60 watts }

PLUG-IN

Single output 52-53
Dual output 54-57
Wide Adjust output 53
MIL tested 56
High Isolation 60
Sockets 56
Solder terminals (optional) 52-57

Shipped within 9 DAYS



{ 0-150 volts
2.3-60 amps
30-784 watts }

RACK MOUNTING

Single output 40-41
Dual output 40-41
Wide Adjust output 39
Adjustable Current Limiting 39



POWER SUPPLY SELECTION GUIDE (2 of 2)

Shipped within 9 DAYS



REDUNDANT POWER PACKAGES, AC-DC

PAGE

RACK MOUNTING, WALL MOUNTING

Using two linear supplies44-45, 42-43

Using two switching supplies46-47, 42-43

MODULAR REDUNDANT SYSTEMS48-49, 42-43

Shipped within 6 DAYS



{ 5-48 volts
0.65-10 amps
30 & 50 watt }

MINI ENCAPSULATED

PC Board Mounting

Single output14-15

Sockets14

With Screw Terminals

Single output14-15

Mounting Kits (for wall mounting or DIN rail mounting)19

Shipped within 9 DAYS



{ 3.3-48 volts
8-150 amps
325-1200 watts }

GOLD BOX

Single output36-38

Wide Adjust output36-38

Mounting Kits (for wall mounting or DIN rail mounting)37

Shipped within 3 DAYS



{ 0-1000 volts
0.02-23 amps
0.8-560 watts }

UNREGULATED, AC-DC

GOLD BOX

Single output34-35

Wide Adjust output34-35

Mounting Kits (for wall mounting or DIN rail mounting)37

Shipped within 3 DAYS



{ 0-950 volts
0.02-5 amps
7-140 watts }

PLUG-IN

Single output58-59

Wide Adjust output58-59

Sockets55

Shipped within 9 DAYS



POWER SYSTEMS

Any Acopian power module(s) can be included.

Built to user requirements50-51

FIND POWER SUPPLY BY MODEL NUMBER47

ORDERING INFORMATION



ORDER DIRECT FROM ACOPIANInside Back Cover

WARRANTYInside Back Cover

TAGGING, TEST DATA, FUNGUS PROOFINGInside Back Cover

3-DAY AND 9-DAY SHIPPING GUARANTEEBack Cover



High Voltage DC-DC

MODULAR
REGULATED

Output ranges: 0 - 1,000 volts to 0 - 30,000 volts

- Shipped Within 6 Days
- Five Year Warranty



DC inputs from 21.6 to 32.0 volts may be used for these versatile power supplies. Although their outputs are continuously adjustable from 0 to their maximum ratings, 20-turn controls permit precise setability.

These supplies have been designed to withstand severe arcing and short circuits without damage. They are ruggedly constructed with quality components to provide many years of reliable service.

SPECIFICATIONS

Input Voltage: +21.6 to 32.0 Vdc.

Output Polarity: Positive output is standard. For negative output, change first letter of model number from P to N.

Regulation (constant voltage operation):

Line: $\pm 0.05\%$

Load: $\pm 0.05\%$

Regulation (constant current operation):

Line: $\pm 0.1\%$

Load: $\pm 0.1\%$ plus 50 μA .

Ripple: 0.05%, peak-to-peak.

Output Controls: Voltage and current may be controlled by means of two 20-turn front panel adjustments, or by using remotely located 1000 ohm potentiometers.

Output Programming: Output voltage and current may be programmed from 0 to full rating by means of control voltage inputs of 0 to +5.1 Vdc.

Voltage Monitor Terminal: Permits monitoring output voltage, stepped down by ratio shown. Accuracy is 2% of maximum rated output voltage.

Current Monitor Terminal: Permits monitoring output current at mV/mA ratio shown. Accuracy is 2% of maximum rated output current.

Inhibit Terminal: Grounding inhibits output.

Input Protection: "Soft start" circuit minimizes start-up power stresses.

Output Protection: Current regulation circuit protects power supply from short circuits, overload, and arcing.

Efficiency: Greater than 70% at full load.

Response Time: Less than 5 mS for 100 μA load step change.

Stability: 0.05% over eight hours, after 30 minute warmup.

Temperature Coefficient: 200 PPM/ $^{\circ}\text{C}$ = 0.02%/ $^{\circ}\text{C}$ (Typical).

Ambient Operating Temperature: -10 to $+60^{\circ}\text{C}$.
No derating required.

Storage Temperature: -20 to $+85^{\circ}\text{C}$.

Humidity: Maximum of 90% relative, non-condensing.

Connections: 24" flying lead for high side of output and 5-way binding post for return (ground). All other connections on pluggable terminal block.

Mounting: Threaded mounting holes permit mounting to a chassis, cabinet wall or bracket, or they may be used on a test bench or tabletop. To mount from the power supply side of the mounting surface or for DIN rail mounting, see accessory Mounting Kits on page 37.

OPTIONS

Output Connector: Models with an output of 5000 volts or less can be provided with an MHV connector (and 8' long detachable shielded output cable with mating MHV connector installed) instead of the flying lead. To order, add suffix letter "T" to the model number and \$50.00 to price.



High Voltage DC-DC (continued)

MODULAR
REGULATED

OPTIONAL OUTPUT CONNECTOR


Models with an output of 5000 volts or less can be provided with an MHV connector (and 8' long detachable output cable with mating MHV connector installed) instead of the flying lead. To order, add suffix letter T to the model number and \$50.00 to price.




DC-DC MODELS

Output Range kVdc	Output Current mA	Output Monitor Ratio		(\$) Price	Model (Positive Output)*	Case Size
		Voltage	Current mV/mA			
0-1	30	1,000:1	100:1	490	P01HD30	HD345
0-1	60	1,000:1	10:1	590	P01HD60	HD355
0-1.5	20	1,000:1	100:1	490	P01.5HD20	HD345
0-1.5	40	1,000:1	100:1	590	P01.5HD40	HD355
0-2	15	1,000:1	100:1	490	P02HD15	HD345
0-2	30	1,000:1	100:1	590	P02HD30	HD355
0-2.5	12	1,000:1	100:1	490	P02.5HD12	HD345
0-2.5	24	1,000:1	100:1	590	P02.5HD24	HD355
0-3.5	8.5	1,000:1	100:1	490	P03.5HD8.5	HD345
0-3.5	17	1,000:1	100:1	590	P03.5HD17	HD355
0-5	6	10,000:1	100:1	550	P05HD6	HD345
0-5	12	10,000:1	100:1	650	P05HD12	HD355
0-7.5	4	10,000:1	100:1	550	P07.5HD4	HD345
0-7.5	8	10,000:1	100:1	650	P07.5HD8	HD355
0-10	3	10,000:1	1,000:1	550	P010HD3	HD345
0-10	6	10,000:1	100:1	650	P010HD6	HD355
0-12	2.5	10,000:1	1,000:1	550	P012HD2.5	HD345
0-12	5	10,000:1	100:1	650	P012HD5	HD355
0-15	2	10,000:1	1,000:1	590	P015HD2	HD345
0-15	4	10,000:1	100:1	690	P015HD4	HD355
0-18	1.6	10,000:1	1,000:1	590	P018HD1.6	HD345
0-18	3.2	10,000:1	1,000:1	690	P018HD3.2	HD355
0-20	1.5	10,000:1	1,000:1	690	P020HD1.5	HD345
0-20	3	10,000:1	1,000:1	790	P020HD3	HD355
0-22	1.3	10,000:1	1,000:1	690	P022HD1.3	HD345
0-22	2.6	10,000:1	1,000:1	790	P022HD2.6	HD355
0-25	1.2	10,000:1	1,000:1	790	P025HD1.2	HD345
0-25	2.4	10,000:1	1,000:1	890	P025HD2.4	HD355
0-30	1	10,000:1	1,000:1	790	P030HD1	HD345
0-30	2	10,000:1	1,000:1	890	P030HD2	HD355

* Positive output is standard. For negative output, change first letter of model number from P to N.

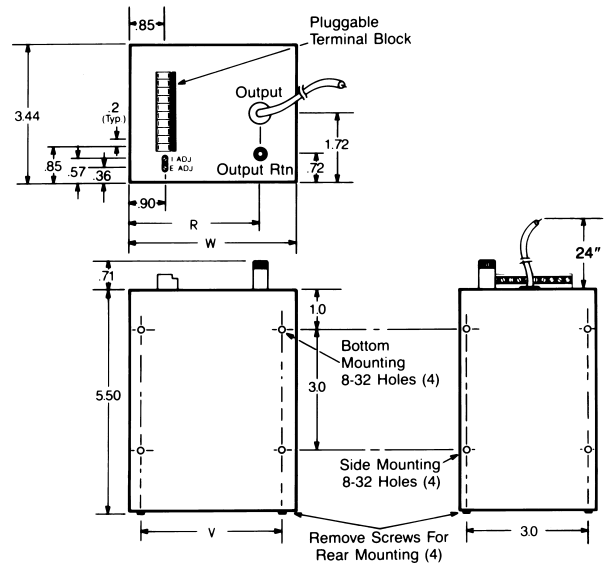

PLUGGABLE TERMINAL BLOCK CONNECTIONS



Case Size	W	V	R	Approx. Weight
HD345	4.13	3.50	3.25	2 lb.
HD355	5.13	4.50	4.25	2 lb. 12 oz.



It's easy to find what you need at www.acopian.com or www.find a power supply.com
P.O. Box 638, Easton, PA 18044 • Phone: (610) 258-5441 • FAX: (610) 258-2842



High Voltage AC-DC

MODULAR
REGULATED

Output ranges: 0 - 1,000 volts to 0 - 30,000 volts

- Shipped Within 6 Days
- Five Year Warranty



These modular High Voltage supplies may be used as constant voltage or constant current sources. They may be remotely programmed by means of either voltage or resistance, and have provisions for remote monitoring and output inhibiting. All control and monitoring connections

are on a pluggable terminal block that functions as a connector, providing wiring convenience and permitting easy and rapid connect/disconnect. Outputs are arc/short circuit protected.

SPECIFICATIONS

Input Voltage: 105-125 VAC, 50-400 Hz, single phase.

Output Polarity: Positive output is standard. For negative output, change first letter of model number from P to N.

Regulation (constant voltage operation):

Line: $\pm 0.05\%$

Load: $\pm 0.05\%$

Regulation (constant current operation):

Line: $\pm 0.1\%$

Load: $\pm 0.1\%$ plus 50 μ A.

Ripple: 0.05%, peak-to-peak.

Output Controls: Voltage and current may be controlled by means of two 20-turn front panel adjustments, or by using remotely located 1000 ohm potentiometers.

Output Programming: Output voltage and current may be programmed from 0 to full rating by means of control voltage inputs of 0 to +5.1 Vdc.

Voltage Monitor Terminal: Permits monitoring output voltage, stepped down by ratio shown. Accuracy is 2% of maximum rated output voltage.

Current Monitor Terminal: Permits monitoring output current at mV/mA ratio shown. Accuracy is 2% of maximum rated output current.

Inhibit Terminal: Grounding inhibits output.

Input Protection: "Soft start" circuit minimizes start-up power stresses.

Output Protection: Current regulation circuit protects power supply from short circuits, overload, and arcing.

Efficiency: Greater than 70% at full load.

Response Time: Less than 5 mS for 100 μ A load step change.

Stability: 0.05% over eight hours, after 30 minute warmup.

Temperature Coefficient: 200 PPM/ $^{\circ}$ C = 0.02%/ $^{\circ}$ C (Typical).

Ambient Operating Temperature: -10 to $+60^{\circ}$ C. No derating required.

Storage Temperature: -20 to $+85^{\circ}$ C.

Humidity: Maximum of 90% relative, non-condensing.

Connections: 24" flying lead for high side of output and 5-way binding post for return (ground) are at the rear. AC input connections on separate terminal strip. All other connections on pluggable terminal block.

Mounting: Threaded mounting holes permit mounting to a chassis, cabinet wall or bracket, or they may be used on a test bench or tabletop. To mount from the power supply side of the mounting surface, see accessory Mounting Kit GB8 on page 37.

OPTIONS

Terminal Strip Cover: Clips on AC input terminal strip. To order, add suffix "M" to model number and \$5.00 to price.

Output Connector: Models with an output of 5000 volts or less can be provided with an MHV connector (and 8' long detachable shielded output cable with mating MHV connector installed) instead of the flying lead. To order, add suffix letter "T" to the model number and \$50.00 to price.


230 Volt Input: For operation on inputs of 210-250 VAC, 50-400 Hz, single phase. To order, add suffix "-230" to model number and \$40.00 to price. The "-230" option requires two additional days.



It's easy to find what you need at www.acopian.com or www.find_a_power_supply.com
P.O. Box 638, Easton, PA 18044 • Phone: (610) 258-5441 • FAX: (610) 258-2842

High Voltage AC-DC (continued)


MODULAR
REGULATED

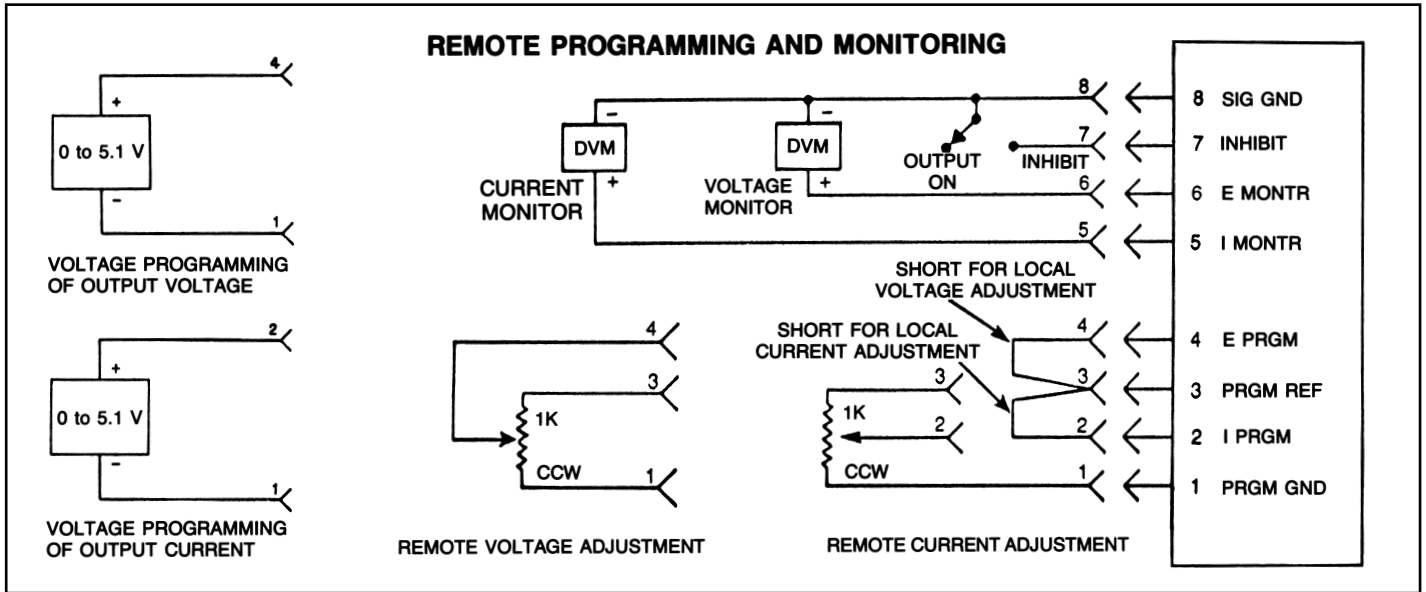

AC-DC MODELS

Output Range kVdc	Output Current mA	Output Monitor Ratio		Price	Model (Positive Output)*	Case Size
		Voltage	Current mV/mA			
0-1	30	1,000:1	100:1	590	P01HA30	HA349
0-1	60	1,000:1	10:1	690	P01HA60	HA359
0-1.5	20	1,000:1	100:1	590	P01.5HA20	HA349
0-1.5	40	1,000:1	100:1	690	P01.5HA40	HA359
0-2	15	1,000:1	100:1	590	P02HA15	HA349
0-2	30	1,000:1	100:1	690	P02HA30	HA359
0-2.5	12	1,000:1	100:1	590	P02.5HA12	HA349
0-2.5	24	1,000:1	100:1	690	P02.5HA24	HA359
0-3.5	8.5	1,000:1	100:1	590	P03.5HA8.5	HA349
0-3.5	17	1,000:1	100:1	690	P03.5HA17	HA359
0-5	6	10,000:1	100:1	650	P05HA6	HA349
0-5	12	10,000:1	100:1	750	P05HA12	HA359
0-7.5	4	10,000:1	100:1	650	P07.5HA4	HA349
0-7.5	8	10,000:1	100:1	750	P07.5HA8	HA359
0-10	3	10,000:1	1,000:1	650	P010HA3	HA349
0-10	6	10,000:1	100:1	750	P010HA6	HA359
0-12	2.5	10,000:1	1,000:1	650	P012HA2.5	HA349
0-12	5	10,000:1	100:1	750	P012HA5	HA359
0-15	2	10,000:1	1,000:1	690	P015HA2	HA349
0-15	4	10,000:1	100:1	790	P015HA4	HA359
0-18	1.6	10,000:1	1,000:1	690	P018HA1.6	HA349
0-18	3.2	10,000:1	1,000:1	790	P018HA3.2	HA359
0-20	1.5	10,000:1	1,000:1	790	P020HA1.5	HA349
0-20	3	10,000:1	1,000:1	890	P020HA3	HA359
0-22	1.3	10,000:1	1,000:1	790	P022HA1.3	HA349
0-22	2.6	10,000:1	1,000:1	890	P022HA2.6	HA359
0-25	1.2	10,000:1	1,000:1	890	P025HA1.2	HA349
0-25	2.4	10,000:1	1,000:1	990	P025HA2.4	HA359
0-30	1	10,000:1	1,000:1	890	P030HA1	HA349
0-30	2	10,000:1	1,000:1	990	P030HA2	HA359

* Positive output is standard. For negative output, change first letter of model number from P to N.

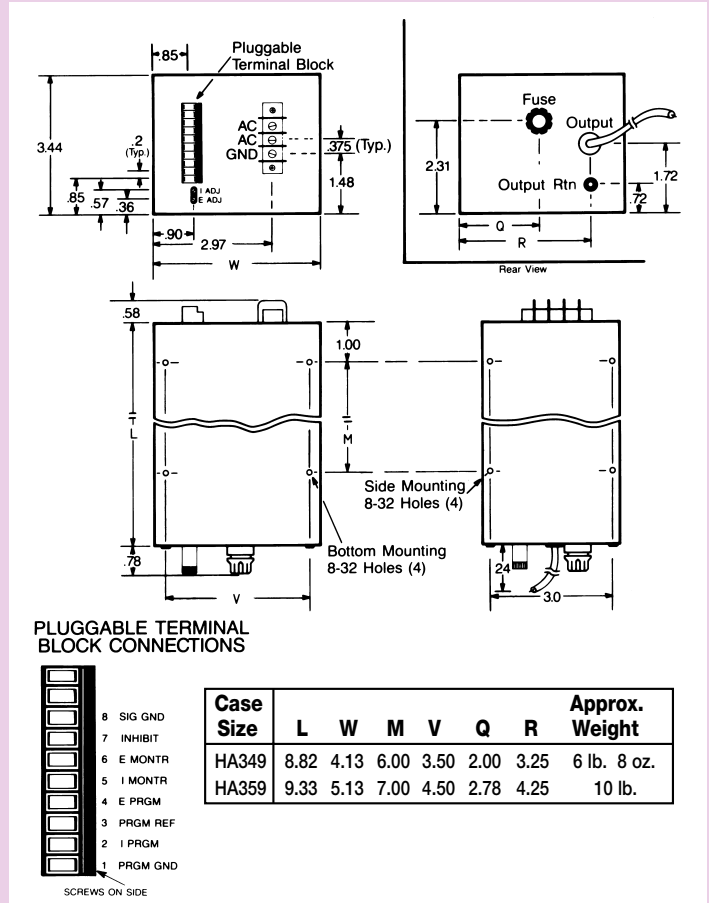

It's easy to find what you need at www.acopian.com or www.find a power supply.com
P.O. Box 638, Easton, PA 18044 • Phone: (610) 258-5441 • FAX: (610) 258-2842



High Voltage AC-DC

RACK MOUNTING
REGULATED

Output ranges: 0 - 1,000 volts to 0 - 30,000 volts

- Shipped Within 9 Days
- Five Year Warranty



Ideal for laboratory and instrumentation applications, these rack mounting supplies have the same output ratings and specifications as the modular supplies shown on pages 4 and 5, but additionally feature calibrated

ten-turn controls (with locking vernier dials) for precisely setting voltage and current. Voltmeter, ammeter and handles are standard. An 8' long shielded output cable is included.

SPECIFICATIONS

Input Voltage: 105-125 VAC, 50-400 Hz, single phase.

Input Current:

30 watt output ratings: 0.6A

60 watt output ratings: 1.2A

Output Polarity: Positive output is standard. For negative output, change first letter of model number from P to N.

Regulation (constant voltage operation):

Line: $\pm 0.05\%$

Load: $\pm 0.05\%$

Regulation (constant current operation):

Line: $\pm 0.1\%$

Load: $\pm 0.1\%$ plus 50 μA .

Ripple: 0.05%, peak-to-peak.

Output Controls: Voltage and current may be controlled by means of two 10-turn front panel adjustments with locking vernier dials. Control linearity is 1% of full rated output. Calibration accuracy is 1% of rated output plus 1% of setting. (Remotely located 1000 ohm potentiometers may alternately be used for output control.)

Metering: Voltmeter and ammeter are standard. Accuracy is 2% of full scale.

Voltage Monitor Terminal: Permits remote monitoring of output voltage, stepped down by ratio shown. Accuracy is 2% of maximum rated output voltage.

Current Monitor Terminal: Permits remote monitoring of output current, at mV/mA ratio shown. Accuracy is 2% of maximum rated output current.

Inhibit Terminal: Grounding inhibits output.

Input Protection: "Soft start" circuit minimizes start-up power stresses.

Output Programming: Output voltage and current may be programmed from 0 to full rating by means of control voltage inputs of 0 to +5.1 Vdc, $\pm 2\%$.

Output Protection: Current regulation circuit protects power supply from short circuits, overload, and arcing.

Response Time: Less than 5 mS for 100 μA load step change.

Stability: 0.05% over eight hours, after 30 minute warmup.

Temperature Coefficient: 200 PPM/ $^{\circ}\text{C}$ = 0.02%/ $^{\circ}\text{C}$ (Typical).

Ambient Operating Temperature: -10 to $+60^{\circ}\text{C}$. No derating required.

Storage Temperature: -20 to $+85^{\circ}\text{C}$.

Humidity: Maximum of 90% relative, non-condensing.

Connections:

Input, Control and Monitoring: Screw terminals.

Output: High voltage connector (Type varies with model number). An 8' shielded output cable, with mating connector installed, is provided.

OPTIONS


Terminal Strip Cover: Clips on AC input terminal strip. To order, add suffix "M" to model number and \$5.00 to price.

230 Volt Input: All models can be alternately furnished for operation on inputs of 210-250 VAC, 50-400 Hz, single phase. To order, add suffix "-230" to model number and add \$40.00 to price. The "-230" option requires two additional days.




High Voltage AC-DC (continued)

RACK MOUNTING
REGULATED

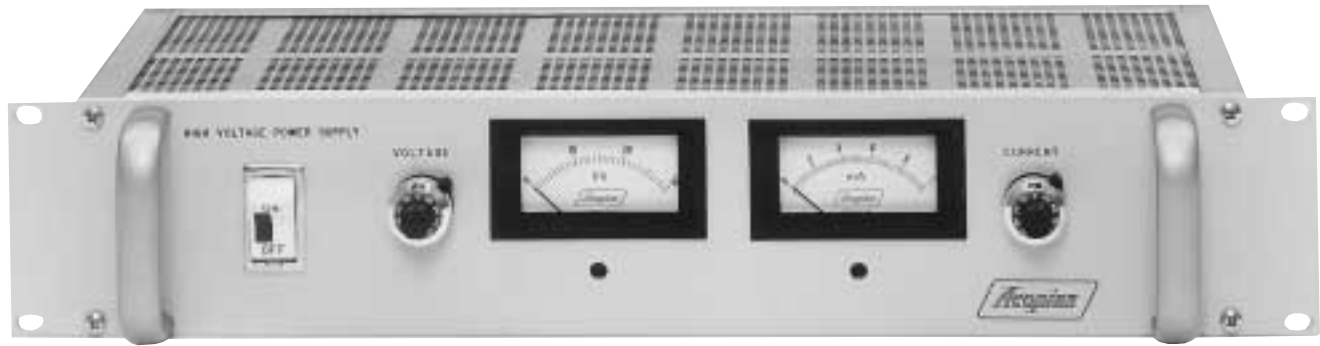

Output Range kVdc	Output Current mA	Output Monitor Ratio		(\$) Price	Model (Positive Output)*
		Voltage	Current mV/mA		
0-1	30	1,000:1	100:1	995	P01HP30
0-1	60	1,000:1	10:1	1095	P01HP60
0-1.5	20	1,000:1	100:1	1095	P01.5HP20
0-1.5	40	1,000:1	100:1	1195	P01.5HP40
0-2	15	1,000:1	100:1	995	P02HP15
0-2	30	1,000:1	100:1	1095	P02HP30
0-2.5	12	1,000:1	100:1	995	P02.5HP12
0-2.5	24	1,000:1	100:1	1095	P02.5HP24
0-3.5	8.5	1,000:1	100:1	995	P03.5HP8.5
0-3.5	17	1,000:1	100:1	1095	P03.5HP17
0-5	6	10,000:1	100:1	1050	P05HP6
0-5	12	10,000:1	100:1	1150	P05HP12
0-7.5	4	10,000:1	100:1	1050	P07.5HP4
0-7.5	8	10,000:1	100:1	1150	P07.5HP8
0-10	3	10,000:1	1,000:1	1050	P010HP3
0-10	6	10,000:1	100:1	1150	P010HP6
0-12	2.5	10,000:1	1,000:1	1050	P012HP2.5
0-12	5	10,000:1	100:1	1150	P012HP5
0-15	2	10,000:1	1,000:1	1095	P015HP2
0-15	4	10,000:1	100:1	1195	P015HP4
0-18	1.6	10,000:1	1,000:1	1095	P018HP1.6
0-18	3.2	10,000:1	1,000:1	1195	P018HP3.2
0-20	1.5	10,000:1	1,000:1	1095	P020HP1.5
0-20	3	10,000:1	1,000:1	1195	P020HP3
0-22	1.3	10,000:1	1,000:1	1150	P022HP1.3
0-22	2.6	10,000:1	1,000:1	1250	P022HP2.6
0-25	1.2	10,000:1	1,000:1	1195	P025HP1.2
0-25	2.4	10,000:1	1,000:1	1295	P025HP2.4
0-30	1	10,000:1	1,000:1	1195	P030HP1
0-30	2	10,000:1	1,000:1	1295	P030HP2

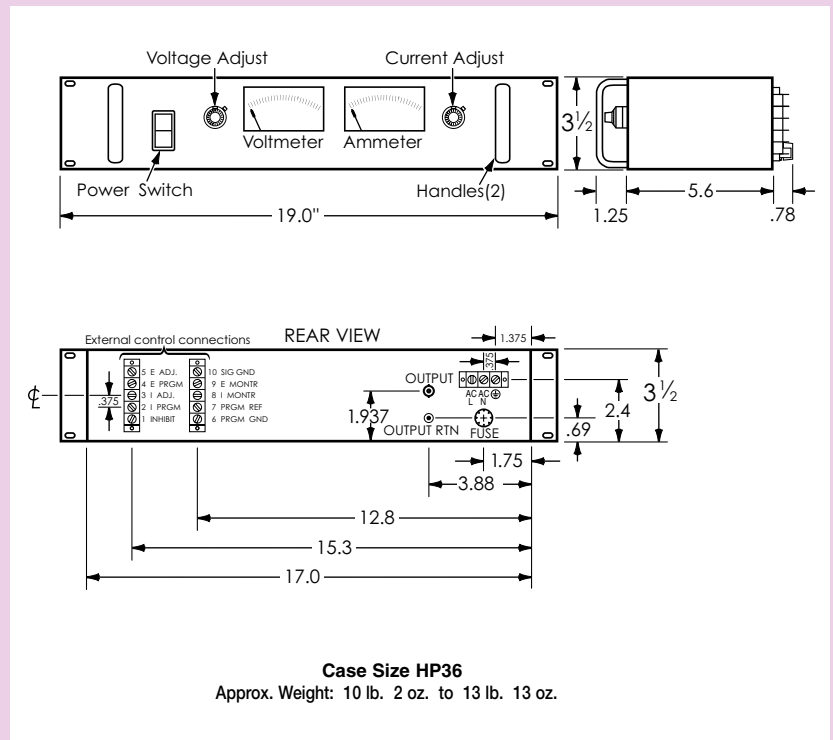

* Positive output is standard. For negative output, change first letter of model number from P to N.





single output

Mini Encapsulated - PC Board mounting

LINEAR REGULATED

AC-DC



- Shipped Within 3 Days
- All Models U.L. Recognized
- One Year Warranty

Conserve space with mini-modules as small as 2.3" x 1.8" x 1.0". Models with outputs ranging from 1 to 75 volts, and from 30 mA to 2.5 amps are available. All feature excellent regulation and ripple parameters, and are short circuit protected.

Rugged encapsulated construction and generously derated components assure years of reliable operation. Mini-modules are also available with multiple outputs - see pages 10 and 11.

STANDARD FEATURES

- May be used in series
- No derating or heat sinking required
- Short circuit protected
- Small, lightweight

SPECIFICATIONS

Input Voltage: 105-125 VAC, 47 to 420 Hz, single phase.

Output Voltage Setting: Output is factory preset to within $\pm 2\%$ (1 to 9 volt models) or $\pm 1\%$ (10 to 75 volt models) of the nominal output voltage.

T/C terminal (Output Voltage Trim Adjustment): The T/C terminal can be used to trim the output more precisely to the nominal voltage rating by connecting an external resistor from the T/C terminal to either the + or - terminal.

Polarity: Output is floating. Either positive or negative terminal may be grounded.

Ambient Operating Temperature: -20 to $+71^{\circ}\text{C}$. No derating required.

Storage Temperature: -55 to $+85^{\circ}\text{C}$.

Temperature Coefficient: From 9 to 75 volts, typically $0.015\%/^{\circ}\text{C}$; 1 to 8 volts, $0.03\%/^{\circ}\text{C}$.

Impedance: 0.07 ohms at 1 kHz and 0.2 ohms at 10 kHz (approx.).


Weight:

- 7 oz. (Case size ES-10)
- 13 oz. (Case size EL-10)
- 1 lb. 3 oz. (Case size EL-13)
- 1 lb. 15 oz. (Case size EL-20)


Mounting: May be mounted on printed circuit board or in socket (see page 11).

OPTIONS

230 Volt Input: All models can be alternately furnished for operation on an input of 210 to 250 VAC, 47-420 Hz. To order, add suffix "-230" to model number and \$10.00 to price. Requires two additional days.

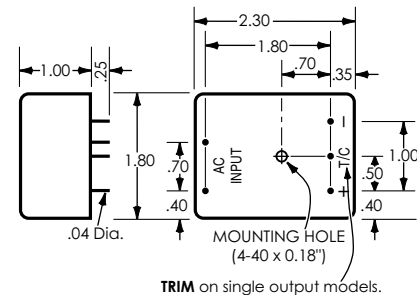

Case Size ES-10

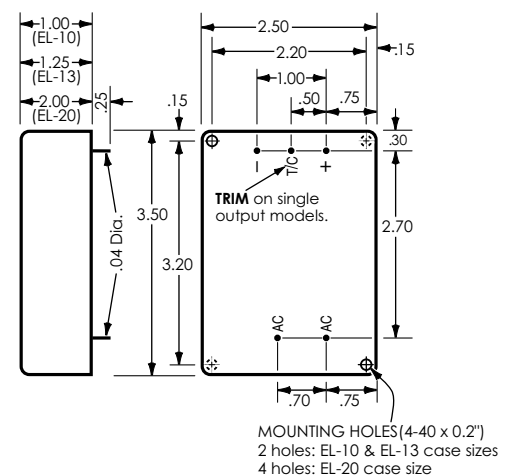

Case Sizes EL-10, EL-13, and EL-20





dual & triple outputs

Mini Encapsulated - PC Board mounting

LINEAR REGULATED
AC-DC



- Shipped Within 3 Days
- All Models U.L. Recognized
- One Year Warranty

These dual and triple output mini-modules are compact and convenient sources of the voltages required to power operational amplifiers and related circuits. They may be mounted directly on printed circuit board assemblies, simplifying system layout and minimizing the connectors and wiring required.

STANDARD FEATURES

- May be used in series
- No derating or heat sinking required
- Short circuit protected

SPECIFICATIONS

Input Voltage: 105-125 VAC, 47 to 420 Hz, single phase.

Output Voltage Setting: Each output is factory preset to within $\pm 2\%$ (1 to 9 volt outputs) or $\pm 1\%$ (10 to 28 volt outputs) of the nominal output voltage.

T/C terminal: For case sizes ES-10, EL-10, EL-13, EL-20, and END sections marked (*), the T/C terminal is the output common. For case size END sections, except those marked (*), the T/C terminal can be used to trim the output more precisely to the nominal voltage rating by connecting an external resistor from the T/C terminal to either the + or - terminal.

Polarity: Single output sections may be used in either polarity. Dual output sections, marked (*), are provided with a positive/common/negative output connection configuration.

Ambient Operating Temperature: -20 to $+71^{\circ}\text{C}$. No derating required.

Storage Temperature: -55 to $+85^{\circ}\text{C}$.

Temperature Coefficient: From 9 to 28 volts, typically $0.015\%/^{\circ}\text{C}$; 1 to 8 volts, $0.03\%/^{\circ}\text{C}$.




Impedance: 0.07 ohms at 1 kHz and 0.2 ohms at 10 kHz (approx.).

Weight: 7 oz. (Case size ES-10)
13 oz. (Case size END and EL-10)
1 lb. 3 oz. (Case size EL-13)
1 lb. 15 oz. (Case size EL-20)

Mounting: May be mounted on printed circuit board or in socket (see page 11).

OPTIONS

230 Volt Input: All models can be alternately furnished for operation on an input of 210 to 250 VAC, 47-420 Hz. To order, add suffix "-230" to model number and \$10.00 to price. Requires two additional days.

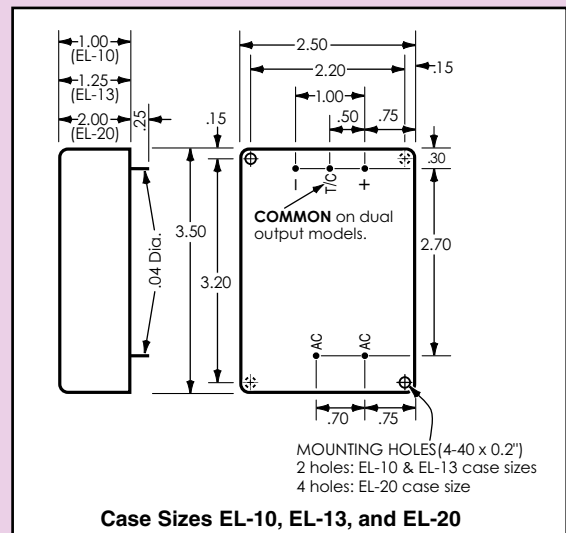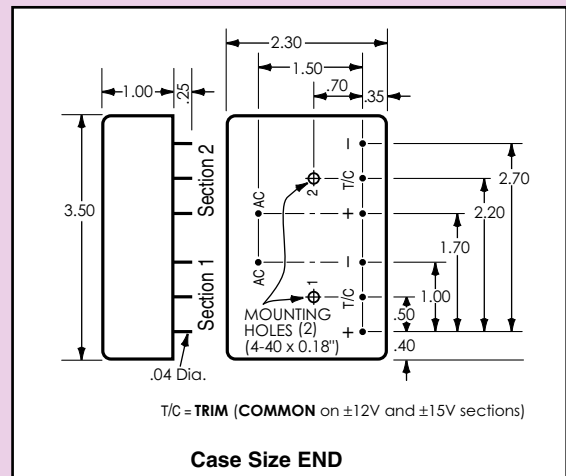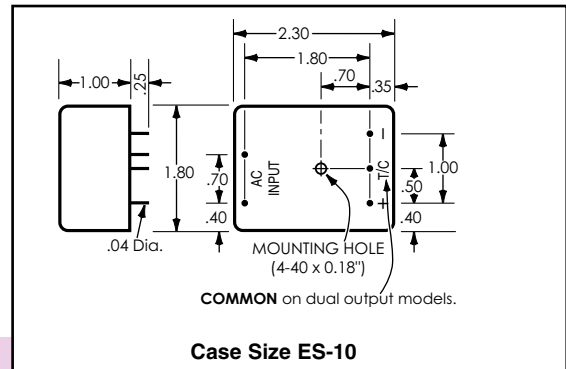


Mini Encapsulated - PC Board mounting (continued)


dual & triple outputs
LINEAR REGULATED, AC-DC

ACCESSORY SOCKETS


For use with PC board mounting Mini Linears and PC board mounting DC-DC Converters. Each of these sockets has a sturdy phenolic base with gold plated teflon-insulated contacts.



(for case sizes ES-10 and ESC-10)
Model ES-1.....\$15

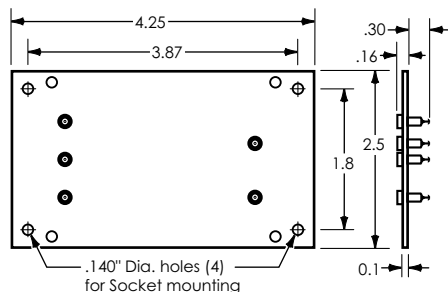

(for case sizes EL-10, EL-13, EL-20 and ELC-10)
Model EL-1.....\$15

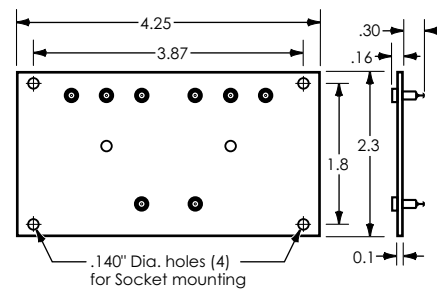

(for case size END)
Model END-1.....\$20

DUAL TRACKING OUTPUTS

(These model numbers are complete as shown.)

Nominal Output Voltages	Amps. per Output	Regulation		Ripple mV RMS	(\$) Price	Model	Case Size
		Load ± %	Line ± %				
±5	.150	.1	.05	1.5	79	D5-15	EL-10
±5	.250	.1	.05	1.5	98	D5-25	EL-10
±5	.500	.1	.05	1.5	135	D5-50	EL-20
±10	.200	.05	.05	1	89	D10-20	EL-10
±10	.300	.05	.05	1	115	D10-30	EL-10
±10	.400	.1	.05	1	135	D10-40	EL-20
±12	.025	.1	.05	1	49	D12-03	ES-10
±12	.050	.1	.05	1	59	D12-05	ES-10
±12	.100	.05	.05	1	69	D12-10A	EL-10
±12	.150	.05	.05	1	79	D12-15A	EL-10
±12	.200	.05	.05	1	89	D12-20	EL-10

Nominal Output Voltages	Amps. per Output	Regulation		Ripple mV RMS	(\$) Price	Model	Case Size
		Load ± %	Line ± %				
±12	.300	.05	.05	1	105	D12-30	EL-13
±12	.350	.05	.05	1	115	D12-35	EL-13
±12	.500	.1	.05	1	135	D12-50	EL-20
±15	.025	.1	.05	1	49	D15-03	ES-10
±15	.050	.1	.05	1	59	D15-05	ES-10
±15	.100	.05	.05	1	69	D15-10A	EL-10
±15	.150	.05	.05	1	79	D15-15A	EL-10
±15	.200	.05	.05	1	89	D15-20	EL-10
±15	.300	.05	.05	1	105	D15-30	EL-13
±15	.350	.05	.05	1	115	D15-35	EL-13
±15	.500	.1	.05	1	135	D15-50	EL-20

DUAL ISOLATED & TRIPLE OUTPUTS, (User-selectable)

How to Order:

Select two **sections** from those listed below. The complete model number is the combination of the two **section** numbers selected. (*Note that some **sections** provide two outputs; combination with a single output **section** results in a triple-output module.)

Example: The combination of sections 6E20D and 15E10D is the Model 6E20D-15E10D. Always assign the lower voltage section first. (Two of the same section can also be selected.) For pricing purposes, add the costs of the individual sections selected.

Example: The price of the Model 6E20D-15E10D is \$97.00 total (\$52.00 plus \$45.00).

Nominal Output Voltage	Output Current Amps.	Regulation		Ripple mV RMS	(see 'How to Order')		Case Size
		Load ± %	Line ± %		Price per Section (\$)	Section	
1	.250	.1	.05	0.5	52	1E25D	END
1.5	.250	.1	.05	0.5	52	1.5E25D	END
2	.200	.1	.05	0.5	52	2E20D	END
3	.250	.1	.05	0.5	52	3E25D	END
3.3	.250	.05	.05	0.5	52	3.3E25D	END
4	.200	.05	.05	0.5	52	4E20D	END
5	.250	.05	.05	0.5	52	5E25D	END
6	.200	.05	.05	0.5	52	6E20D	END
7	.170	.05	.05	0.5	52	7E17D	END
8	.150	.05	.05	0.5	52	8E15D	END
9	.130	.05	.05	0.5	45	9E13D	END
10	.120	.02	.02	0.5	45	10E12D	END
±12*	.050	.10	.05	1	52	D12E05	END
12	.100	.02	.02	0.5	45	12E10D	END
12	.150	.05	.05	0.5	55	12E15D	END
13	.100	.02	.02	0.5	45	13E10D	END

Nominal Output Voltage	Output Current Amps.	Regulation		Ripple mV RMS	(see 'How to Order')		Case Size
		Load ± %	Line ± %		Price per Section (\$)	Section	
14	.100	.02	.02	0.5	45	14E10D	END
±15*	.050	.10	.05	1	52	D15E05	END
15	.100	.02	.02	0.5	45	15E10D	END
15	.150	.05	.05	0.5	55	15E15D	END
16	.080	.02	.02	0.5	45	16E08D	END
17	.070	.02	.02	0.5	45	17E07D	END
18	.060	.02	.02	0.5	45	18E06D	END
20	.060	.02	.02	0.5	45	20E06D	END
21	.060	.02	.02	0.5	45	21E06D	END
22	.050	.02	.02	0.5	45	22E05D	END
23	.050	.02	.02	0.5	45	23E05D	END
24	.050	.02	.02	0.5	45	24E05D	END
25	.050	.02	.02	0.5	45	25E05D	END
26	.040	.02	.02	0.5	45	26E04D	END
27	.040	.02	.02	0.5	45	27E04D	END
28	.040	.02	.02	0.5	45	28E04D	END

*Dual output section. Combination with a single output section results in a triple output module.





single & dual tracking outputs

Mini Encapsulated - with screw terminals

LINEAR REGULATED
AC-DC

- Shipped Within 3 Days
- All Models U.L. Recognized
- One Year Warranty



Although small in size, these mini-modules offer high performance at modest prices. All models, with series regulated outputs ranging from 1 to 75 volts and as high as 2.5 amps, may be mounted in an area only 3.5" x 2.5". Dual output models are available with the ratings

commonly required for driving op amps and other balanced loads. Terminal strip input/output connections eliminate all need for sockets or soldering. Short circuit protection, encapsulated construction, and conservative design assure long term reliability.

STANDARD FEATURES

- May be used in series
- No derating or heat sinking required
- Short circuit protected
- Small, lightweight

SPECIFICATIONS

Input Voltage: 105-125 VAC, 47 to 420 Hz, single phase.

Output Voltage Setting: Outputs are factory preset to within $\pm 2\%$ (1 to 9 volt models) or $\pm 1\%$ (10 to 75 volt models) of the nominal output voltage.

T/C terminal: For single output models, the T/C terminal can be used to trim the output more precisely to the nominal voltage rating by connecting an external resistor from the T/C terminal to either the + or - terminal. For dual output models, the T/C terminal is the output common.

Polarity: Either positive or negative terminal of a single output module may be grounded. Dual output modules have a positive/common/negative output terminal configuration.

Ambient Operating Temperature: -20 to $+71^{\circ}\text{C}$. No derating required.

Storage Temperature: -55 to $+85^{\circ}\text{C}$.


Temperature Coefficient: From 9 to 75 volts, typically $0.015\%/^{\circ}\text{C}$; 1 to 8 volts, $0.03\%/^{\circ}\text{C}$.

Impedance: 0.07 ohms at 1 kHz and 0.2 ohms at 10 kHz (approx.).

Mounting: Threaded mounting holes permit mounting to a chassis, cabinet wall or bracket, or they may be used on a test bench or tabletop. When wall-mounting or DIN rail mounting is desired, use accessory Mounting Kits on page 19.

OPTIONS

230 Volt Input: All models can be alternately furnished for operation on an input of 210 to 250 VAC, 47-420 Hz. To order, add suffix "-230" to model number and \$10.00 to price. The "-230" option requires two additional days.

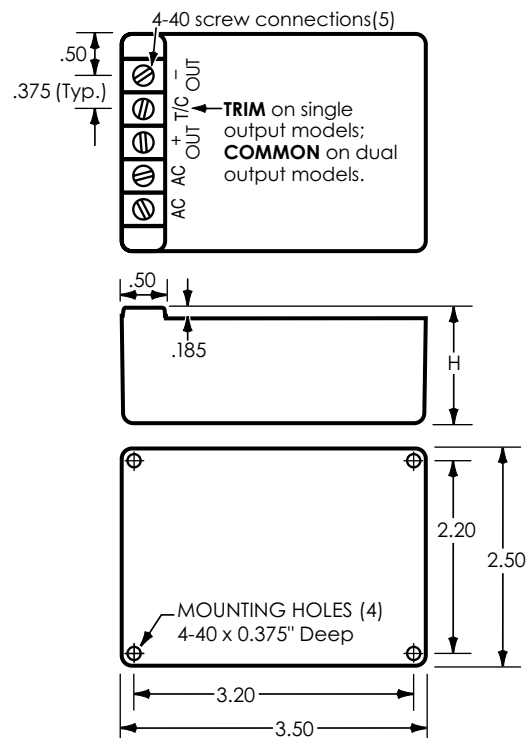

Case Size	H	Approx. Weight
EB-10	1.375	15 oz.
EB-13	1.625	1 lb. 4 oz.
EB-20	2.375	2 lb. 1 oz.



SINGLE OUTPUT, WITH SCREW TERMINALS (continued)

(For Mini Encapsulated power supplies with higher wattage outputs than those shown below, see pages 14-15.)

Nominal Output Voltage	Output Current Amps.	Regulation		Ripple mV RMS	(\$) Price	Model	Case Size
		Load ±%	Line ±%				
1	.500	.4	.05	1	79	1EB50	EB-10
1.5	.500	.3	.05	1	79	1.5EB50	EB-10
1.5	1.0	.5	.05	1	105	1.5EB100	EB-13
1.5	2.5	.6	.05	1	140	1.5EB250	EB-20
2	.400	.25	.05	1	79	2EB40	EB-10
3	.500	.25	.05	1	79	3EB50	EB-10
3.3	.500	.15	.05	1	79	3.3EB50	EB-10
3.3	1.0	.4	.05	1	105	3.3EB100	EB-13
3.3	2.0	.4	.05	1	125	3.3EB200	EB-20
4	.400	.15	.05	1	79	4EB40	EB-10
5	.500	.15	.05	1	79	5EB50	EB-10
5	1.0	.25	.05	1	95	5EB100	EB-13
5	1.5	.25	.05	1	110	5EB150	EB-13
5	2.0	.25	.05	1	125	5EB200	EB-20
5	2.5	.25	.05	1	140	5EB250	EB-20
6	.400	.1	.05	1	79	6EB40	EB-10
6	.550	.25	.05	1	95	6EB55	EB-10
6	1.0	.25	.05	1	110	6EB100	EB-13
6	1.75	.2	.05	1	130	6EB175	EB-20
7	.340	.1	.05	1	79	7EB34	EB-10
7	.450	.2	.05	1	95	7EB45	EB-10
7	.900	.25	.05	1	110	7EB90	EB-13
7	1.15	.2	.05	1	130	7EB115	EB-20
8	.300	.1	.05	1	79	8EB30	EB-10
8	.700	.2	.05	1	110	8EB70	EB-13
8	1.1	.2	.05	1	130	8EB110	EB-20
9	.260	.1	.05	1	79	9EB26	EB-10
9	.450	.15	.05	1	95	9EB45	EB-10
9	.850	.2	.05	1	110	9EB85	EB-13
9	1.5	.2	.05	1	135	9EB150	EB-20
10	.240	.05	.05	1	79	10EB24	EB-10
10	.400	.15	.05	1	95	10EB40	EB-10
10	.750	.2	.05	1	110	10EB75	EB-13
10	1.2	.15	.05	1	135	10EB120	EB-20
11	.220	.05	.05	1	79	11EB22	EB-10
11	.350	.15	.05	1	95	11EB35	EB-10
11	.600	.15	.05	1	110	11EB60	EB-13
11	1.0	.15	.05	1	135	11EB100	EB-20
12	.200	.05	.05	1	79	12EB20	EB-10
12	.400	.1	.05	1	95	12EB40	EB-10
12	.700	.15	.05	1	115	12EB70	EB-13
12	1.2	.2	.05	1	135	12EB120	EB-20
13	.200	.05	.05	1	79	13EB20	EB-10
13	.350	.1	.05	1	95	13EB35	EB-10
13	.600	.1	.05	1	115	13EB60	EB-13
13	1.0	.15	.05	1	135	13EB100	EB-20
14	.200	.05	.05	1	79	14EB20	EB-10
14	.300	.1	.05	1	95	14EB30	EB-10
14	.500	.1	.05	1	110	14EB50	EB-13
14	1.0	.15	.05	1	135	14EB100	EB-20
15	.200	.05	.05	1	79	15EB20	EB-10
15	.400	.1	.05	1	95	15EB40	EB-10
15	.600	.1	.05	1	110	15EB60	EB-13
15	1.0	.15	.05	1	135	15EB100	EB-20
16	.160	.05	.05	1	79	16EB16	EB-10
16	.350	.1	.05	1	100	16EB35	EB-10
16	.500	.1	.05	1	115	16EB50	EB-13
16	.900	.15	.05	1	135	16EB90	EB-20
17	.140	.05	.05	1	79	17EB14	EB-10
17	.325	.1	.05	1	100	17EB33	EB-10
17	.450	.1	.05	1	115	17EB45	EB-13
17	.750	.15	.05	1	135	17EB75	EB-20
18	.120	.05	.05	1	79	18EB12	EB-10
18	.270	.1	.05	1	95	18EB27	EB-10
18	.400	.1	.05	1	110	18EB40	EB-13
18	.550	.1	.05	1	130	18EB55	EB-20

Nominal Output Voltage	Output Current Amps.	Regulation		Ripple mV RMS	(\$) Price	Model	Case Size
		Load ±%	Line ±%				
19	.120	.05	.05	1	79	19EB12	EB-10
19	.250	.1	.05	1	95	19EB25	EB-10
19	.400	.1	.05	1	110	19EB40	EB-13
19	.700	.1	.05	1	135	19EB70	EB-20
20	.120	.05	.05	1	79	20EB12	EB-10
20	.200	.1	.05	1	95	20EB20	EB-10
20	.400	.1	.05	1	110	20EB40	EB-13
20	.700	.1	.05	1	135	20EB70	EB-20
21	.120	.05	.05	1	79	21EB12	EB-10
21	.175	.1	.05	1	95	21EB18	EB-10
21	.375	.1	.05	1	110	21EB38	EB-13
21	.600	.1	.05	1	130	21EB60	EB-20
22	.100	.05	.05	1	79	22EB10	EB-10
22	.150	.1	.05	1	95	22EB15	EB-10
22	.300	.1	.05	1	110	22EB30	EB-13
22	.500	.1	.05	1	130	22EB50	EB-20
23	.100	.05	.05	1	79	23EB10	EB-10
23	.200	.1	.05	1	95	23EB20	EB-10
23	.300	.1	.05	1	110	23EB30	EB-13
23	.600	.1	.05	1	135	23EB60	EB-20
24	.100	.05	.05	1	79	24EB10	EB-10
24	.200	.1	.05	1	95	24EB20	EB-10
24	.350	.1	.05	1	115	24EB35	EB-13
24	.600	.1	.05	1	135	24EB60	EB-20
25	.100	.05	.05	1	79	25EB10	EB-10
25	.190	.1	.05	1	95	25EB19	EB-10
25	.325	.1	.05	1	115	25EB33	EB-13
25	.550	.1	.05	1	135	25EB55	EB-20
26	.080	.05	.05	1	79	26EB08	EB-10
26	.170	.1	.05	1	95	26EB17	EB-10
26	.300	.1	.05	1	110	26EB30	EB-13
26	.450	.1	.05	1	130	26EB45	EB-20
27	.080	.05	.05	1	79	27EB08	EB-10
27	.160	.1	.05	1	95	27EB16	EB-10
27	.300	.1	.05	1	110	27EB30	EB-13
27	.500	.1	.05	1	135	27EB50	EB-20
28	.080	.05	.05	1	79	28EB08	EB-10
28	.150	.1	.05	1	95	28EB15	EB-10
28	.300	.1	.05	1	115	28EB30	EB-13
28	.500	.1	.05	1	135	28EB50	EB-20
30	.080	.02	.02	1	85	30EB08	EB-13
32	.070	.02	.02	1	85	32EB07	EB-13
34	.060	.02	.02	1	85	34EB06	EB-13
35	.050	.02	.02	1	85	35EB05	EB-13
36	.050	.02	.02	1	85	36EB05	EB-13
38	.040	.02	.02	1	85	38EB04	EB-13
40	.030	.02	.02	1	85	40EB03	EB-13
40	.060	.02	.02	1	105	40EB06	EB-13
42	.030	.02	.02	1	85	42EB03	EB-13
44	.030	.02	.02	1	85	44EB03	EB-13
45	.030	.02	.02	1	85	45EB03	EB-13
48	.030	.02	.02	1	85	48EB03	EB-13
48	.050	.02	.02	1	105	48EB05	EB-13
50	.030	.02	.02	1	85	50EB03	EB-13
50	.050	.02	.02	1	105	50EB05	EB-13
55	.040	.02	.02	1	105	55EB04	EB-13
60	.050	.02	.02	1	105	60EB05	EB-13
65	.050	.02	.02	1	105	65EB05	EB-13
70	.040	.02	.02	1	105	70EB04	EB-13
75	.030	.02	.02	1	105	75EB03	EB-13
185	.025	Unregulated		2V	55	NX-25B	EB-10
185	.050	Unregulated		3.5V	75	NX-50B	EB-13

DUAL TRACKING OUTPUTS

Nominal Output Voltages	Amps. per Output	Regulation		Ripple mV RMS	(\$) Price	Model	Case Size
		Load ±%	Line ±%				
±5	.150	.1	.05	1.5	85	DB5-15	EB-10
±5	.250	.1	.05	1.5	105	DB5-25	EB-10
±5	.500	.1	.05	1.5	145	DB5-50	EB-20
±10	.200	.05	.05	1	95	DB10-20	EB-10
±10	.300	.05	.05	1	125	DB10-30	EB-13
±10	.400	.1	.05	1	145	DB10-40	EB-20
±12	.100	.05	.05	1	75	DB12-10	EB-10
±12	.150	.05	.05	1	85	DB12-15	EB-10
±12	.200	.05	.05	1	95	DB12-20	EB-10

Nominal Output Voltages	Amps. per Output	Regulation		Ripple mV RMS	(\$) Price	Model	Case Size
		Load ±%	Line ±%				
±12	.300	.05	.05	1	115	DB12-30	EB-13
±12	.350	.05	.05	1	125	DB12-35	EB-13
±12	.500	.1	.05	1	145	DB12-50	EB-20
±15	.100	.05	.05	1	75	DB15-10	EB-10
±15	.150	.05	.05	1	85	DB15-15	EB-10
±15	.200	.05	.05	1	95	DB15-20	EB-10
±15	.300	.05	.05	1	115	DB15-30	EB-13
±15	.350	.05	.05	1	125	DB15-35	EB-13
±15	.500	.1	.05	1	145	DB15-50	EB-20



It's easy to find what you need at www.acopian.com or www.find a power supply.com
 P.O. Box 638, Easton, PA 18044 • Phone: (610) 258-5441 • FAX: (610) 258-2842



single output

Mini Encapsulated - PC Board mounting or - with screw terminals

SWITCHING REGULATED
DC output (accepts either AC or DC input)

- Shipped Within 6 Days
- One Year Warranty



These versatile power supplies mount in a surface area of only 3.5" x 2.5", and are available in a choice of mounting styles. They have a high efficiency and may be operated through a wide temperature range.

A common-mode input filter reduces conducted noise, and the shielded case minimizes radiated energy. Their outputs may be used in either polarity, and may be precisely trimmed.

STANDARD FEATURES

- Compact, lightweight, fully encapsulated
- Short circuit and overload protected
- No heat sinking or forced air required
- Input/output isolation
- Extensive EMI filtering and shielding

SPECIFICATIONS

Input Voltage: 85-130 VAC, 47-420 Hz, single phase, or 120-180 Vdc. DC input may be connected without regard to polarity.

Output Voltage Setting: Output is factory preset to within $\pm 2\%$ (5 to 9 volt models) or $\pm 1\%$ (10 to 48 volt models) of the nominal output voltage.

T/C terminal (Output Voltage Trim Adjustment): The T/C terminal can be used to trim the output more precisely to the nominal voltage rating by connecting an external resistor from the T/C terminal to either the + or - terminal.

Polarity: Output is floating. Either positive or negative terminal may be grounded.

Regulation:

Load: $\pm 0.05\%$ (5 and 6 volt "WL" models, $\pm 0.1\%$)

Line: $\pm 0.05\%$

Ambient Operating Temperature: -10 to $+71^\circ\text{C}$.

No derating required through $+50^\circ\text{C}$.

Storage Temperature: -40 to $+85^\circ\text{C}$.

Temperature Coefficient: $\pm 0.02\%/^\circ\text{C}$ (Typical).

Humidity: Maximum of 90% relative, non-condensing.

Overload/Short Circuit Protection: Power foldback with automatic recovery.

Isolation:

Input to output: 1400 Vdc

Input to ground: 1400 Vdc

Output to ground: 400 Vdc

Efficiency: 76% (Typical).


Switching Frequency: 225 kHz (Typical).

Transient Response: Returns to within $\pm 1\%$ of output setting within 300 μs . Maximum of $\pm 3\%$ output excursion following a load step change from 50% to 100% of rating.

Holdup Time: 33 mS (Typical, at nominal input voltage with full load).

Mounting: Models for PC Board mounting may also be mounted in the socket shown below. For models with screw terminals, when wall-mounting or DIN rail mounting is desired, use accessory Mounting Kits on page 19.

ACCESSORY SOCKET

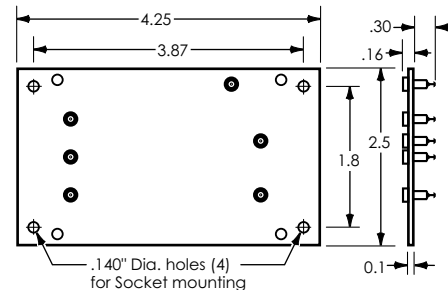

Accepts power supplies in case sizes ELW-13 and ELW-20. Sturdy phenolic base with gold plated teflon-insulated contacts.

Model ELW-1\$15



It's easy to find what you need at www.acopian.com or www.find_a_power_supply.com
P.O. Box 638, Easton, PA 18044 • Phone: (610) 258-5441 • FAX: (610) 258-2842



Mini Encapsulated SWITCHING REGULATED (continued)

FOR PC BOARD MOUNTING

Nominal Output Voltage	Output Current Amps. at		Ripple mV (@ 25 MHz BW)		Price	Model	Case Size
	50°C	71°C	RMS	P-P			
5	6.00	3.60	10	50	175	5WL600	ELW-13
5	10.00	6.00	10	50	200	5WL1000	ELW-20
6	5.00	3.00	10	50	175	6WL500	ELW-13
6	8.30	4.95	10	50	200	6WL830	ELW-20
7	4.20	2.50	15	100	175	7WL420	ELW-13
7	7.10	4.26	15	100	200	7WL710	ELW-20
8	3.70	2.20	15	100	175	8WL370	ELW-13
8	6.20	3.70	15	100	200	8WL620	ELW-20
9	3.30	2.00	15	100	175	9WL330	ELW-13
9	5.50	3.30	15	100	200	9WL550	ELW-20
10	3.00	1.80	15	100	175	10WL300	ELW-13
10	5.00	3.00	15	100	200	10WL500	ELW-20
11	2.70	1.60	15	100	175	11WL270	ELW-13
11	4.50	2.70	15	100	200	11WL450	ELW-20
12	2.50	1.50	15	100	175	12WL250	ELW-13
12	4.10	2.45	15	100	200	12WL410	ELW-20
13	2.30	1.38	15	100	175	13WL230	ELW-13
13	3.80	2.25	15	100	200	13WL380	ELW-20
14	2.10	1.25	15	100	175	14WL210	ELW-13
14	3.50	2.10	15	100	200	14WL350	ELW-20
15	2.00	1.20	15	100	175	15WL200	ELW-13
15	3.30	1.95	15	100	200	15WL330	ELW-20
16	1.85	1.10	15	100	175	16WL185	ELW-13
16	3.10	1.85	15	100	200	16WL310	ELW-20
17	1.75	1.05	15	100	175	17WL175	ELW-13
17	2.90	1.75	15	100	200	17WL290	ELW-20
18	1.65	1.00	15	100	175	18WL165	ELW-13
18	2.75	1.65	15	100	200	18WL275	ELW-20
19	1.55	.93	15	100	175	19WL155	ELW-13
19	2.60	1.55	15	100	200	19WL260	ELW-20
20	1.50	.90	15	100	175	20WL150	ELW-13
20	2.50	1.50	15	100	200	20WL250	ELW-20
21	1.40	.84	15	100	175	21WL140	ELW-13
21	2.35	1.40	15	100	200	21WL235	ELW-20
22	1.35	.80	15	100	175	22WL135	ELW-13
22	2.25	1.35	15	100	200	22WL225	ELW-20
23	1.30	.78	15	100	175	23WL130	ELW-13
23	2.15	1.30	15	100	200	23WL215	ELW-20
24	1.25	.75	15	100	175	24WL125	ELW-13
24	2.10	1.25	15	100	200	24WL210	ELW-20
25	1.20	.72	15	100	175	25WL120	ELW-13
25	2.00	1.20	15	100	200	25WL200	ELW-20
26	1.15	.70	15	100	175	26WL115	ELW-13
26	1.90	1.15	15	100	200	26WL190	ELW-20
27	1.10	.66	15	100	175	27WL110	ELW-13
27	1.85	1.10	15	100	200	27WL185	ELW-20
28	1.05	.63	15	100	175	28WL105	ELW-13
28	1.75	1.05	15	100	200	28WL175	ELW-20
30	1.00	.60	25	150	175	30WL100	ELW-13
30	1.65	1.00	25	150	200	30WL165	ELW-20
36	.85	.50	25	150	175	36WL85	ELW-13
36	1.35	.80	25	150	200	36WL135	ELW-20
40	.75	.45	25	150	175	40WL75	ELW-13
40	1.25	.75	25	150	200	40WL125	ELW-20
45	.65	.40	25	150	175	45WL65	ELW-13
45	1.10	.65	25	150	200	45WL110	ELW-20
48	.65	.40	25	150	175	48WL65	ELW-13
48	1.05	.60	25	150	200	48WL105	ELW-20

WITH SCREW TERMINALS

Nominal Output Voltage	Output Current Amps. at		Ripple mV (@ 25 MHz BW)		Price	Model	Case Size
	50°C	71°C	RMS	P-P			
5	6.00	3.60	10	50	180	5WB600	EBW-13
5	10.00	6.00	10	50	205	5WB1000	EBW-20
6	5.00	3.00	10	50	180	6WB500	EBW-13
6	8.30	4.95	10	50	205	6WB830	EBW-20
7	4.20	2.50	15	100	180	7WB420	EBW-13
7	7.10	4.26	15	100	205	7WB710	EBW-20
8	3.70	2.20	15	100	180	8WB370	EBW-13
8	6.20	3.70	15	100	205	8WB620	EBW-20
9	3.30	2.00	15	100	180	9WB330	EBW-13
9	5.50	3.30	15	100	205	9WB550	EBW-20
10	3.00	1.80	15	100	180	10WB300	EBW-13
10	5.00	3.00	15	100	205	10WB500	EBW-20
11	2.70	1.60	15	100	180	11WB270	EBW-13
11	4.50	2.70	15	100	205	11WB450	EBW-20
12	2.50	1.50	15	100	180	12WB250	EBW-13
12	4.10	2.45	15	100	205	12WB410	EBW-20
13	2.30	1.38	15	100	180	13WB230	EBW-13
13	3.80	2.25	15	100	205	13WB380	EBW-20
14	2.10	1.25	15	100	180	14WB210	EBW-13
14	3.50	2.10	15	100	205	14WB350	EBW-20
15	2.00	1.20	15	100	180	15WB200	EBW-13
15	3.30	1.95	15	100	205	15WB330	EBW-20
16	1.85	1.10	15	100	180	16WB185	EBW-13
16	3.10	1.85	15	100	205	16WB310	EBW-20
17	1.75	1.05	15	100	180	17WB175	EBW-13
17	2.90	1.75	15	100	205	17WB290	EBW-20
18	1.65	1.00	15	100	180	18WB165	EBW-13
18	2.75	1.65	15	100	205	18WB275	EBW-20
19	1.55	.93	15	100	180	19WB155	EBW-13
19	2.60	1.55	15	100	205	19WB260	EBW-20
20	1.50	.90	15	100	180	20WB150	EBW-13
20	2.50	1.50	15	100	205	20WB250	EBW-20
21	1.40	.84	15	100	180	21WB140	EBW-13
21	2.35	1.40	15	100	205	21WB235	EBW-20
22	1.35	.80	15	100	180	22WB135	EBW-13
22	2.25	1.35	15	100	205	22WB225	EBW-20
23	1.30	.78	15	100	180	23WB130	EBW-13
23	2.15	1.30	15	100	205	23WB215	EBW-20
24	1.25	.75	15	100	180	24WB125	EBW-13
24	2.10	1.25	15	100	205	24WB210	EBW-20
25	1.20	.72	15	100	180	25WB120	EBW-13
25	2.00	1.20	15	100	205	25WB200	EBW-20
26	1.15	.70	15	100	180	26WB115	EBW-13
26	1.90	1.15	15	100	205	26WB190	EBW-20
27	1.10	.66	15	100	180	27WB110	EBW-13
27	1.85	1.10	15	100	205	27WB185	EBW-20
28	1.05	.63	15	100	180	28WB105	EBW-13
28	1.75	1.05	15	100	205	28WB175	EBW-20
30	1.00	.60	25	150	180	30WB100	EBW-13
30	1.65	1.00	25	150	205	30WB165	EBW-20
36	.85	.50	25	150	180	36WB85	EBW-13
36	1.35	.80	25	150	205	36WB135	EBW-20
40	.75	.45	25	150	180	40WB75	EBW-13
40	1.25	.75	25	150	205	40WB125	EBW-20
45	.65	.40	25	150	180	45WB65	EBW-13
45	1.10	.65	25	150	205	45WB110	EBW-20
48	.65	.40	25	150	180	48WB65	EBW-13
48	1.05	.60	25	150	205	48WB105	EBW-20

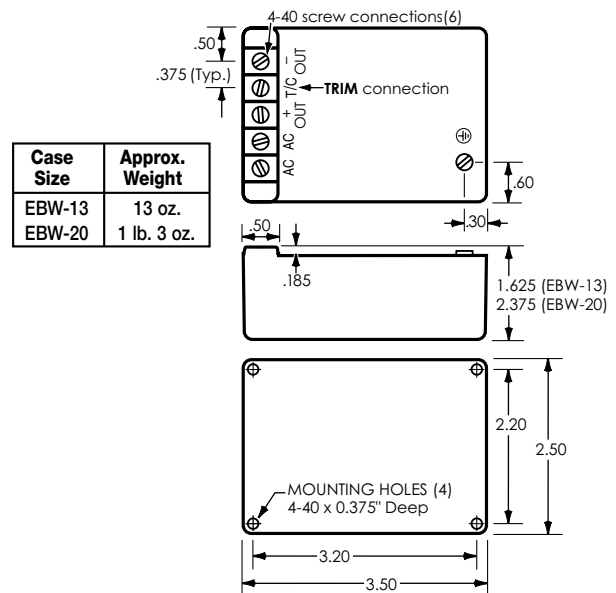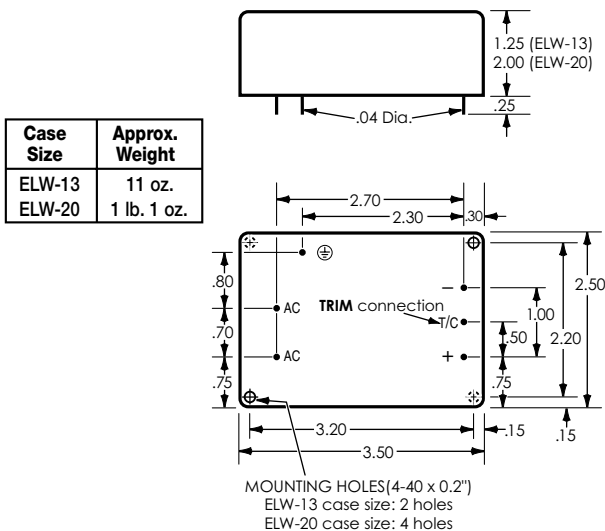



DC-DC Converters

Mini Encapsulated - **PC Board mounting**
REGULATED
single & dual tracking outputs



- Shipped Within 3 Days
- One Year Warranty

These versatile DC-DC Converters are ideally suited for powering a wide variety of analog and digital circuitry, such as op amps, logic and microprocessors. They may be mounted directly on a printed circuit board for OEM applications, or installed in a socket for developmental and small quantity requirements. For DC-DC Converters with screw terminals, see page 18.

Efficiency is in the order of 65%, and is maintained down to low levels of output current. Input reflected ripple is reduced to less than 1% by means of a standard built-in pi filter, and electrostatic shielding on all six sides minimizes radiated energy. High input/output isolation permits separation of the output from the dc input bus to minimize circuit interaction due to ground loops, and the use of inputs in either polarity.

SPECIFICATIONS

Input Voltage: Nominal voltage $\pm 10\%$.

Input Reflected Ripple: 1% E_{in} (max.)

Output Regulation:

Line: $\pm 0.02\%$

Load: $\pm 0.05\%$

Output Ripple (@ 25 MHz bandwidth):

1 mV rms, 50 mV p-p (5-15V outputs).

1.5 mV rms, 75 mV p-p (18-28V outputs).

Output Voltage Setting: Outputs are factory preset to within $\pm 1\%$ of the nominal output voltage.

T/C terminal: For single output models, the T/C terminal can be used to trim the output more precisely to the nominal voltage rating by connecting an external resistor from the T/C terminal to either the + or - terminal. For dual output models, the T/C terminal is the output common.

Polarity: The output of single output models may be connected in either polarity. Dual output models have a positive/common/negative output terminal configuration.

Transient Response (NL-FL): 50 microseconds.

Overload/Short Circuit Protection: Electronic current limiting with automatic recovery. Models in case size ELC-10 also have thermal protection with automatic reset.

Input/Output Isolation:

Voltage: 500 Vdc

Resistance: 100 megohms

Capacitance: 100 pF

Switching Frequency: 20 kHz minimum.



Temperature Coefficient: 0.02%/°C (Typical).

Ambient Operating Temperature: -20 to $+71^\circ\text{C}$.

Storage Temperature: -40 to $+85^\circ\text{C}$.

Humidity: 20% to 80% R.H. (non-condensing).

Mounting: May be mounted on printed circuit board or in socket (see page 11).

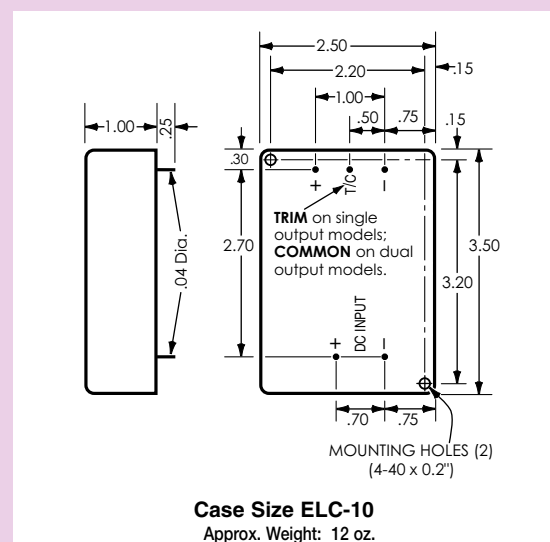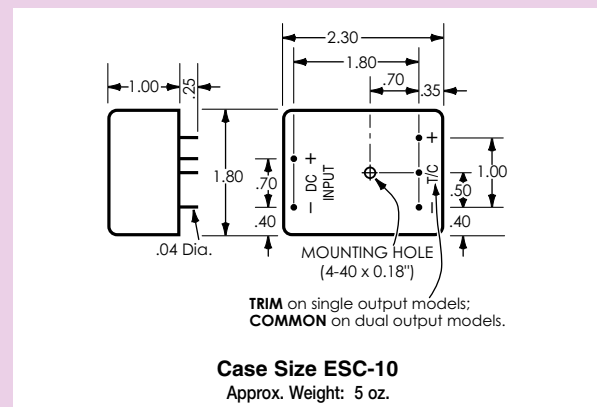



DC-DC Converters

Mini Encapsulated - **with screw terminals**
REGULATED
single & dual tracking outputs

- Shipped Within 3 Days
- One Year Warranty



These DC-DC Converters have the versatility to be used in a broad range of applications. Threaded mounting holes permit them to be mounted to a chassis, cabinet wall or bracket, or they may be used on a test bench or tabletop. Screw terminals provide easy connection without sockets or soldering.

Input/output isolation prevents ground loops, and permits the use of inputs of either polarity; outputs of single output models may be used in either polarity and floated up to 500 volts above the input. Short circuit and thermal protection, and rugged encapsulated construction, assure years of reliable service.

SPECIFICATIONS

Input Voltage: Nominal voltage $\pm 10\%$.

Input Reflected Ripple: $1\% E_{in}$ (max.)

Output Ripple (@25 MHz bandwidth):

1 mV rms, 50 mV p-p (5-15V outputs).

1.5 mV rms, 75 mV p-p (18-28V outputs).

Output Voltage Setting: Outputs are factory preset to within $\pm 1\%$ of the nominal output voltage.

T/C terminal: For single output models, the T/C terminal can be used to trim the output more precisely to the nominal voltage rating by connecting an external resistor from the T/C terminal to either the + or - terminal. For dual output models, the T/C terminal is the output common.

Polarity: The output of single output models may be connected in either polarity. Dual output models have a positive/common/negative output terminal configuration.

Transient Response (NL-FL): 50 microseconds.

Overload/Short Circuit Protection: Electronic current limiting with automatic recovery. All models have thermal protection with automatic reset.

Input/Output Isolation:

Voltage: 500 Vdc

Resistance: 100 megohms

Capacitance: 100 pF

Switching Frequency: 20 kHz minimum.

Temperature Coefficient: $0.02\%/^{\circ}\text{C}$ (Typical).


Ambient Operating Temperature: -20 to $+71^{\circ}\text{C}$.

Storage Temperature: -40 to $+85^{\circ}\text{C}$.

Humidity: 20% to 80% R.H. (non-condensing).

Case Size: EBC-10.


Mounting: Threaded mounting holes permit mounting to a chassis, cabinet wall or bracket, or they may be used on a test bench or tabletop. When wall-mounting or DIN rail mounting is desired, use accessory Mounting Kits on page 19.

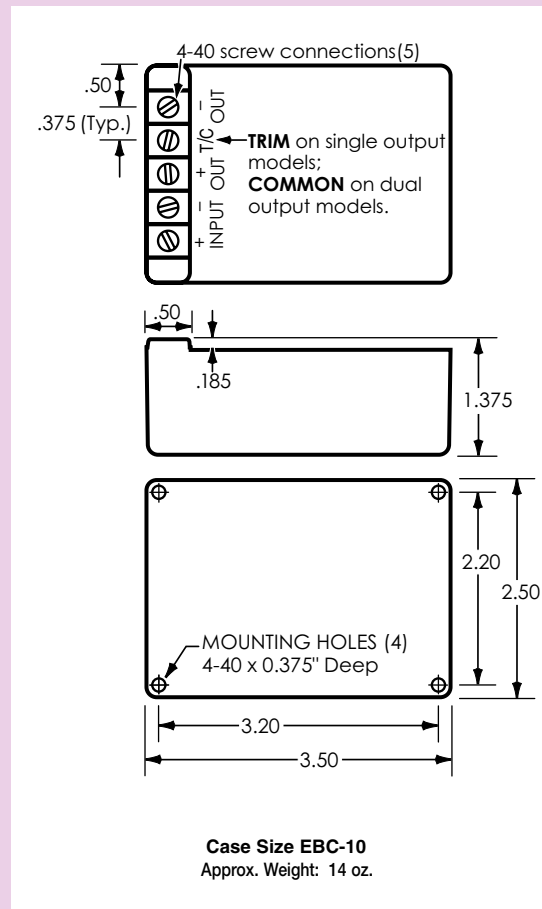

DC-DC Converters - with screw terminals (continued)

ACCESSORY MOUNTING KITS *For use with 'Mini Encapsulated - with Screw Terminals' power supplies.*


FOR WALL MOUNTING

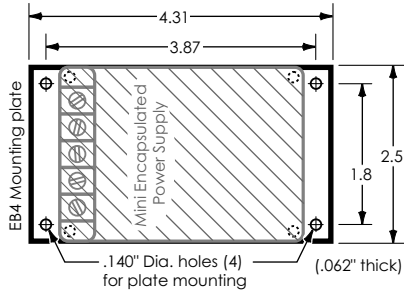

Use Mounting Kit EB4 to mount from the power supply side of the mounting surface, necessary when the other side of the mounting surface is inaccessible. This kit consists of an aluminum plate and four screws for attaching it to the power supply, effectively adding mounting flanges to any Mini Encapsulated power supply with screw terminals or any DC-DC Converter with screw terminals.

Model EB4 \$ 5

FOR DIN RAIL MOUNTING



Mounting Kit EB35DIN consists of an aluminum plate, with two DIN clips attached to it, and four screws for attaching the plate to the bottom of any Mini Encapsulated power supply with screw terminals or any DC-DC Converter with screw terminals. The power supply can then be snapped onto a 35mm 'top hat' type of DIN rail.

Model EB35DIN \$12

SINGLE OUTPUT, WITH SCREW TERMINALS

Nominal Input Voltage	Nominal Output Voltage	Output Current Amps. at			Regulation		(\$) Price	Model
		40°C	55°C	71°C	Load ±%	Line ±%		
5	5	2.50	2.25	2.00	.15	.02	129	5EB5E250
5	6	2.00	1.80	1.60	.15	.02	129	5EB6E200
5	8	1.50	1.35	1.20	.10	.02	129	5EB8E150
5	9	1.40	1.25	1.10	.10	.02	129	5EB9E140
5	10	1.30	1.15	1.00	.10	.02	129	5EB10E130
5	12	1.20	1.10	1.00	.05	.02	129	5EB12E120
5	13	1.10	1.00	.90	.05	.02	129	5EB13E110
5	15	1.00	.90	.80	.05	.02	129	5EB15E100
5	18	.80	.70	.60	.05	.02	129	5EB18E80
5	20	.70	.60	.50	.05	.02	129	5EB20E70
5	24	.60	.55	.50	.05	.02	129	5EB24E60
5	28	.50	.45	.40	.05	.02	129	5EB28E50
12	5	2.50	2.25	2.00	.15	.02	129	12EB5E250
12	6	2.00	1.80	1.60	.15	.02	129	12EB6E200
12	8	1.50	1.35	1.20	.10	.02	129	12EB8E150
12	9	1.40	1.25	1.10	.10	.02	129	12EB9E140
12	10	1.30	1.15	1.00	.10	.02	129	12EB10E130
12	12	1.20	1.10	1.00	.05	.02	129	12EB12E120
12	13	1.10	1.00	.90	.05	.02	129	12EB13E110
12	15	1.00	.90	.80	.05	.02	129	12EB15E100
12	18	.80	.70	.60	.05	.02	129	12EB18E80
12	20	.70	.60	.50	.05	.02	129	12EB20E70
12	24	.60	.55	.50	.05	.02	129	12EB24E60
12	28	.50	.45	.40	.05	.02	129	12EB28E50
15	5	2.50	2.25	2.00	.15	.02	129	15EB5E250
15	6	2.00	1.80	1.60	.15	.02	129	15EB6E200
15	8	1.50	1.35	1.20	.10	.02	129	15EB8E150
15	9	1.40	1.25	1.10	.10	.02	129	15EB9E140
15	10	1.30	1.15	1.00	.10	.02	129	15EB10E130
15	12	1.20	1.10	1.00	.05	.02	129	15EB12E120

Nominal Input Voltage	Nominal Output Voltage	Output Current Amps. at			Regulation		(\$) Price	Model
		40°C	55°C	71°C	Load ±%	Line ±%		
15	13	1.10	1.00	.90	.05	.02	129	15EB13E110
15	15	1.00	.90	.80	.05	.02	129	15EB15E100
15	18	.80	.70	.60	.05	.02	129	15EB18E80
15	20	.70	.60	.50	.05	.02	129	15EB20E70
15	24	.60	.55	.50	.05	.02	129	15EB24E60
15	28	.50	.45	.40	.05	.02	129	15EB28E50
24	5	2.50	2.25	2.00	.15	.02	129	24EB5E250
24	6	2.00	1.80	1.60	.15	.02	129	24EB6E200
24	8	1.50	1.35	1.20	.10	.02	129	24EB8E150
24	9	1.40	1.25	1.10	.10	.02	129	24EB9E140
24	10	1.30	1.15	1.00	.10	.02	129	24EB10E130
24	12	1.20	1.10	1.00	.05	.02	129	24EB12E120
24	13	1.10	1.00	.90	.05	.02	129	24EB13E110
24	15	1.00	.90	.80	.05	.02	129	24EB15E100
24	18	.80	.70	.60	.05	.02	129	24EB18E80
24	20	.70	.60	.50	.05	.02	129	24EB20E70
24	24	.60	.55	.50	.05	.02	129	24EB24E60
24	28	.50	.45	.40	.05	.02	129	24EB28E50
28	5	2.50	2.25	2.00	.15	.02	129	28EB5E250
28	6	2.00	1.80	1.60	.15	.02	129	28EB6E200
28	8	1.50	1.35	1.20	.10	.02	129	28EB8E150
28	9	1.40	1.25	1.10	.10	.02	129	28EB9E140
28	10	1.30	1.15	1.00	.10	.02	129	28EB10E130
28	12	1.20	1.10	1.00	.05	.02	129	28EB12E120
28	13	1.10	1.00	.90	.05	.02	129	28EB13E110
28	15	1.00	.90	.80	.05	.02	129	28EB15E100
28	18	.80	.70	.60	.05	.02	129	28EB18E80
28	20	.70	.60	.50	.05	.02	129	28EB20E70
28	24	.60	.55	.50	.05	.02	129	28EB24E60
28	28	.50	.45	.40	.05	.02	129	28EB28E50

120 to 180

See pages 14-15.

DUAL TRACKING OUTPUTS

Nominal Input Voltage	Nominal Output Voltages	Amps. per Output at			Regulation		(\$) Price	Model
		40°C	55°C	71°C	Load ±%	Line ±%		
5	±10	.60	.55	.50	.05	.02	135	5EB10D60
5	±12	.60	.55	.50	.05	.02	135	5EB12D60
5	±15	.50	.45	.40	.05	.02	135	5EB15D50
5	±18	.40	.35	.30	.05	.02	135	5EB18D40
12	±10	.60	.55	.50	.05	.02	135	12EB10D60
12	±12	.60	.55	.50	.05	.02	135	12EB12D60
12	±15	.50	.45	.40	.05	.02	135	12EB15D50
12	±18	.40	.35	.30	.05	.02	135	12EB18D40
15	±10	.60	.55	.50	.05	.02	135	15EB10D60
15	±12	.60	.55	.50	.05	.02	135	15EB12D60

Nominal Input Voltage	Nominal Output Voltages	Amps. per Output at			Regulation		(\$) Price	Model
		40°C	55°C	71°C	Load ±%	Line ±%		
15	±15	.50	.45	.40	.05	.02	135	15EB15D50
15	±18	.40	.35	.30	.05	.02	135	15EB18D40
24	±10	.60	.55	.50	.05	.02	135	24EB10D60
24	±12	.60	.55	.50	.05	.02	135	24EB12D60
24	±15	.50	.45	.40	.05	.02	135	24EB15D50
24	±18	.40	.35	.30	.05	.02	135	24EB18D40
28	±10	.60	.55	.50	.05	.02	135	28EB10D60
28	±12	.60	.55	.50	.05	.02	135	28EB12D60
28	±15	.50	.45	.40	.05	.02	135	28EB15D50
28	±18	.40	.35	.30	.05	.02	135	28EB18D40




It's easy to find what you need at www.acopian.com or www.find a power supply.com
P.O. Box 638, Easton, PA 18044 • Phone: (610) 258-5441 • FAX: (610) 258-2842



Gold Box SINGLE OUTPUT

LINEAR REGULATED
AC-DC

SERIES A (High Performance)

- Shipped Within 3 Days
- All Models U.L. Recognized
- 
- Five Year Warranty



Series A power supplies offer unusually high performance—many models have regulation of $\pm 0.005\%$. Electronic current limiting and provision for remote voltage sensing are standard features;

overvoltage protection is available as a built-in option. Rugged extruded aluminum cases include threaded mounting holes on bottom, back, and side, permitting mounting in any position.

SERIES A: HIGH PERFORMANCE POWER SUPPLIES

STANDARD FEATURES

- Provision for remote sensing and/or external output adjustment
- Short circuit proof with automatic recovery (electronic current limiting)
- Can be mounted on any of three surfaces (case sizes H8, H11 and H16; two surfaces)

SPECIFICATIONS

Input Voltage: 105-125 VAC, 50-400 Hz, single phase.

Output Specifications: See pages 22 and 23. Series A supplies have model numbers beginning with the letter A.

Remote Voltage Adjustment/Sensing: Provision for sensing the output voltage across the load, so that drops in the load line are compensated, is a standard feature. This feature also permits the use of an externally located potentiometer to adjust output voltage.

Polarity: Output is floating; either positive or negative terminal may be grounded or floated up to 300 volts above ground.

Temperature Coefficient: 0.015%/°C (Typical).

Ambient Operating Temperature: -20 to +71°C.

Storage Temperature: -55 to +85°C.

Response Time: Less than 20 microseconds.


OPTIONS

Overvoltage Protection: An internal preset overvoltage protector is available. To order, add prefix "V" to the model number, and increase standard price as follows:

Outputs of	1.5-70V	75-150V
All case sizes except H16 . . .	\$25.00	\$35.00
Case size H16	75.00	85.00

Terminal Strip Cover: Clips on. To order, add suffix "M" to model number and \$5.00 to price.

230 Volt Input: All models can be alternately furnished for operation on inputs of 210-250 VAC, 50-400 Hz. To order, add suffix "-230" to model number and \$25.00 to price. (For models in case sizes H8, H11 and H16, add \$40.00.) The "-230" option requires two additional days.

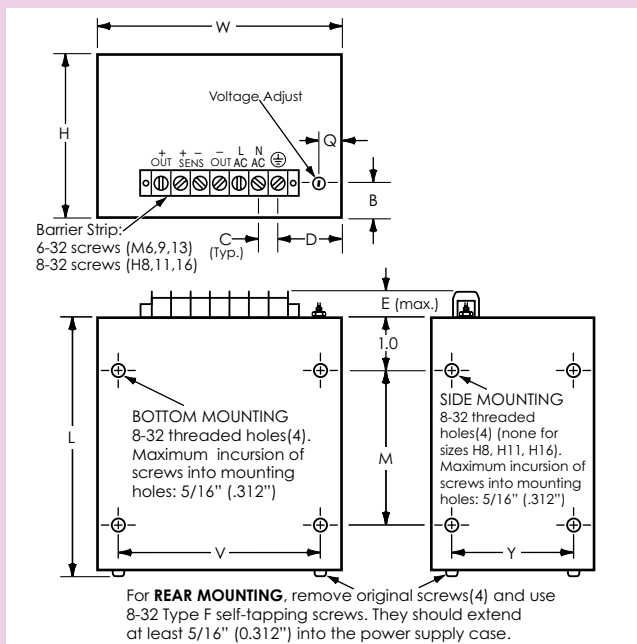

Case Size	L	W	H	M	V	Y	E	Q	B	C	D	Approx. Weight
M6	6.59	5.12	3.44	4.0	4.5	3.0	.58	.5	.75	.375	1.44	4 lb. 4 oz.
M9	9.25	5.12	3.44	6.0	4.5	3.0	.58	.5	.75	.375	1.44	7 lb. 4 oz.
M13	13.25	5.12	3.44	10.0	4.5	3.0	.58	.5	.75	.375	1.44	11 lb.
H8	8.75	7.37	5.12	6.0	6.75	4.56	.78	1.12	1.25	.562	2.25	15 lb. 8 oz.
H11	11.25	7.37	5.12	8.0	6.75	4.56	.78	1.12	1.25	.562	2.25	18 lb. 4 oz.
H16	16.00	7.37	5.12	11.0	6.75	4.56	.78	1.12	1.25	.562	2.25	26 lb.

Mounting: Threaded mounting holes permit mounting to a chassis, cabinet wall or bracket. To mount from the power supply side of the mounting surface or for DIN rail mounting, see accessory Mounting Kits on page 37.





**Gold Box
SINGLE OUTPUT**
LINEAR REGULATED
AC-DC

SERIES B (General Purpose)

- Shipped Within 3 Days
- All Models U.L. Recognized
- **CE**
- Five Year Warranty

Series B power supplies are ideal for powering digital circuitry, test sets, instrument bridges, and process control transmitters. Many models have regulation of $\pm 0.1\%$ or better. All components are generously derated

to insure a long and trouble-free life, and they use the same rugged construction as the Series A line. Overvoltage protection and other options are available.

SERIES B: GENERAL PURPOSE POWER SUPPLIES

STANDARD FEATURES

- Short circuit proof (electronic current limiting)
- May be mounted on any of three surfaces
- Completely serviceable


SPECIFICATIONS

Input Voltage: 105-125 VAC, 50-400 Hz, single phase.
Output Specifications: See pages 22 and 23. Series B supplies have model numbers beginning with the letter B.
Remote Voltage Adjustment/Sensing: Available as an option. See below.
Polarity: Output is floating; either positive or negative terminal may be grounded or floated up to 300 volts above ground.
Temperature Coefficient: 0.02%/°C (Typical).
Ambient Operating Temperature: 0 to +71°C.
Storage Temperature: -55 to +85°C.

OPTIONS

Overvoltage Protection: An internal preset overvoltage protector is available. To order, add prefix "V" to the model number, and add \$25.00 to the standard price of models with outputs of 1.5 to 70 volts; \$35.00, for 75 to 200 volt outputs.
Remote Voltage Sensing: Provision for sensing the output voltage across the load, so that drops in the load lines are compensated, is available on all models. (This option also permits the use of an externally located potentiometer to adjust output voltage.) To order, add prefix "R" to the model number. No increase in price.
Terminal Strip Cover: Clips on. To order, add suffix "M" to model number and \$5.00 to price.

230 Volt Input: All models can be alternately furnished for operation on inputs of 210-250 VAC, 50-400 Hz. To order, add suffix "-230" to model number and \$25.00 to price. The "-230" option requires two additional days.

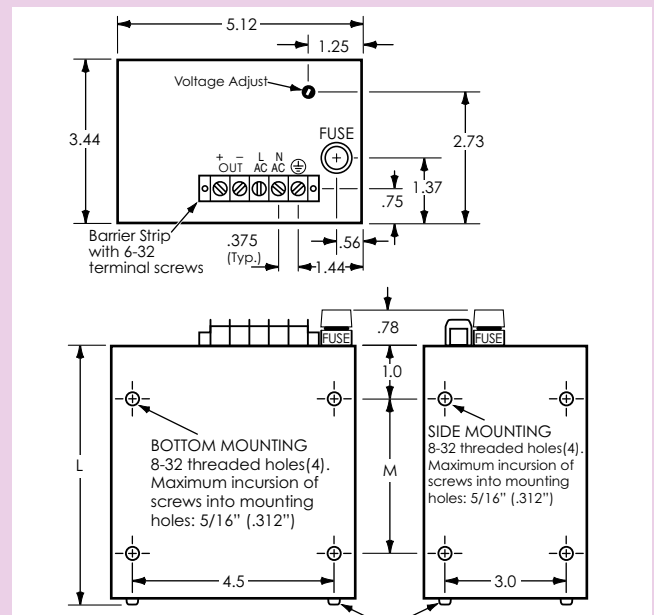

For **REAR MOUNTING**, remove original screws(4) and use 8-32 Type F self-tapping screws. They should extend at least 5/16" (0.312") into the power supply case.

Case Size	L	M	Approx. Weight
G3	3.71	1.62	3 lb. 2 oz.
G5	5.09	3.0	4 lb. 14 oz.
G6	6.59	4.0	5 lb. 8 oz.
G9	9.25	6.0	7 lb. 4 oz.
G13	13.25	10.0	11 lb.

Mounting: Threaded mounting holes permit mounting to a chassis, cabinet wall or bracket. To mount from the power supply side of the mounting surface or for DIN rail mounting, see accessory Mounting Kits on page 37.





Narrow Profile SINGLE OUTPUT

LINEAR REGULATED
AC-DC

- Shipped Within 3 Days
- All Models U.L. Recognized
- Five Year Warranty



Where only a narrow mounting space is available, Acopian Narrow Profile power supplies fit where many others cannot. Choose from Series A (High Performance) and Series B (General Purpose) models with output ratings up to 150 volts, up to 3.5 amps.

SPECIFICATIONS

Input Voltage: 105-125 VAC, 50-400 Hz, single phase.

Output Specifications: See table.

Series A: Model numbers begin with the letter A.

Series B: Model numbers begin with the letter B.

Remote Voltage Adjustment/Sensing: Standard in Series A, not available in Series B.

Polarity: Output is floating; either positive or negative terminal may be grounded or floated up to 300 volts above ground.

Temperature Coefficient:

Series A: 0.015%/°C (Typical).

Series B: 0.02%/°C (Typical).

Ambient Operating Temperature:

Series A: -20 to +71°C.

Series B: 0 to +71°C.

Storage Temperature: -55 to +85°C.

Overload/Short Circuit Protection:

Series A: Foldback current limiting with automatic recovery.


Series B: Input fuse and output current limiting.

OPTIONS

Overvoltage Protection: An internal preset overvoltage protector is available. To order, add prefix "V" to the model number and add \$25.00 to the standard price of models with outputs of 1 to 70 volts; \$35.00, for 75 to 150 volt outputs.

Terminal Strip Cover: Clips on. To order, add suffix "M" to model number and \$5.00 to price.

230 Volt Input: All models can be alternately furnished for operation on inputs of 210-250 VAC, 50-400 Hz. To order, add suffix "-230" to model number and \$25.00 to price. The "-230" option requires two additional days.

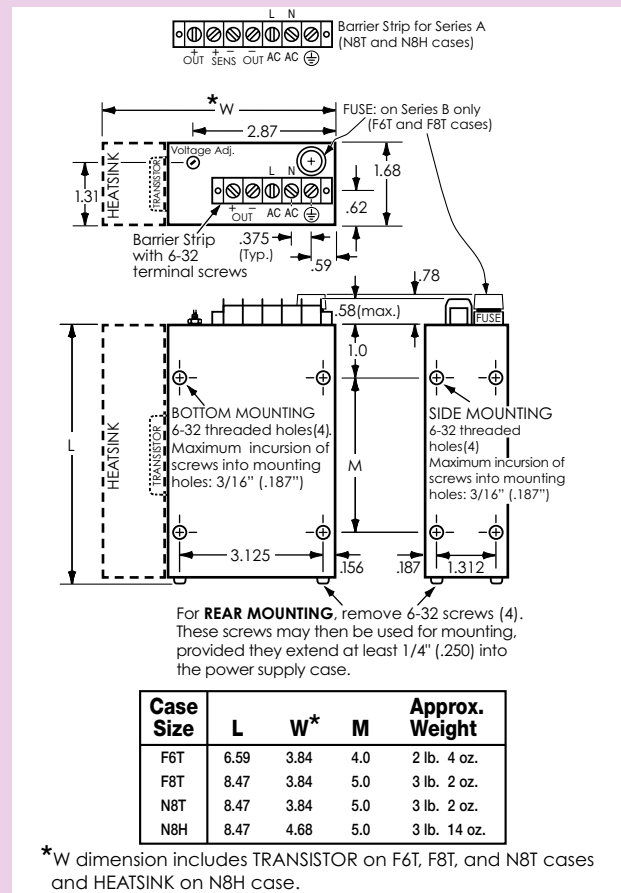

Mounting: Threaded mounting holes permit mounting to a chassis, cabinet wall or bracket, or they may be used on a test bench or tabletop. To mount from the power supply side of the mounting surface or for DIN rail mounting, see accessory Mounting Kits on page 37.






Gold Box & Narrow Profile WIDE ADJUST OUTPUT

LINEAR REGULATED
AC-DC
(fixed & adjustable current limiting)

- Shipped Within 3 Days
- All models U.L. Recognized
- **CE** (Gold Box models)
- Five Year Warranty

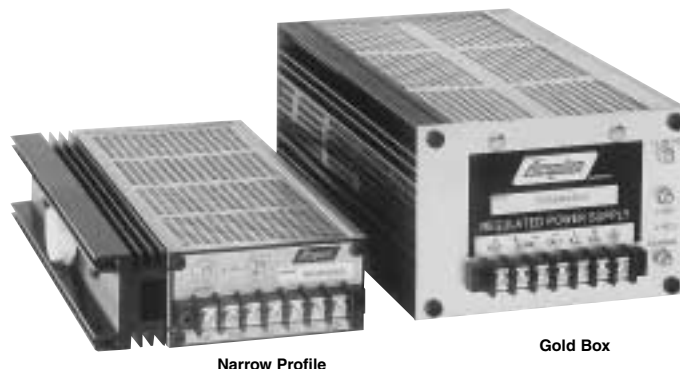

Narrow Profile

Gold Box

These power supplies have the broad adjustment capability required for analog instrumentation and circuitry, electronic system development, basic research, and similar applications.

For applications requiring a constant current or adjustable current limiting, a power supply with a true constant-current characteristic, such as those with model numbers beginning with the letter P, should be used.

SPECIFICATIONS

Input Voltage: 105-125 VAC, 50-400 Hz, single phase.

Regulation, Ripple (in constant voltage mode):
Line Regulation: $\pm 0.005\%$ or 2 mV, whichever is greater.
Load Regulation: $\pm 0.005\%$ or 2 mV, whichever is greater.
Ripple: 0.25 mV rms.

Regulation, Ripple (in constant current mode):
Line Regulation: $\pm 0.1\%$ or 2 mA.
Load Regulation: $\pm 0.2\%$ or 5 mA.
Ripple: 0.1% rms.

Remote Voltage Sensing: Provision for sensing the output voltage across the load, to compensate voltage drops in output wiring, is a standard feature.

Remote Voltage Programming: The output voltage of all models may be controlled by means of external resistance connected in series with the -S lead.

Voltage Programming Coefficient: See table.
Calibration tolerance, $\pm 2\%$.

Current Limiting: Models with fixed current limiting have a rolloff characteristic with automatic recovery. All others have current limiting with a constant-voltage/constant-current crossover characteristic.

Polarity: Output is floating; either positive or negative terminal may be grounded or floated up to 300 volts above ground.

Temperature Coefficient (in constant voltage mode): 0.015%/°C (Typical).

Ambient Operating Temperature: -20 to +71°C.

Storage Temperature: -55 to +85°C.

Mounting: Threaded mounting holes permit mounting to a chassis, cabinet wall or bracket. To mount from the power supply side of the mounting surface or for DIN rail mounting, see accessory Mounting Kits on page 37.

OPTIONS

Remote Current Limiting Adjustment: All models having numbers beginning with the letter P have a built-in (front panel) current limit control. Provision for control of the current limit setting by adjustment of an external resistance is available as an option. To order, add the prefix letter "E" to the model number, and add \$10.00 to the standard price.

The current limit setting is inversely related to resistance. Use a 200 ohm, 1/2 W potentiometer.

Overvoltage Protection: An internally mounted overvoltage protection circuit, set approximately 20% above the maximum output voltage rating of the supply, is available on all models. To order, add prefix "V" to the model number, and increase standard price as follows:

Maximum output of	6-60V	100-150V
All case sizes except H16	\$25.00	\$35.00
Case size H16	75.00	85.00

Terminal Strip Cover: Clips on. To order, add suffix "M" to model number and \$5.00 to price.

230 Volt Input: All models can be alternately furnished for operation on inputs of 210-250 VAC, 50-400 Hz. To order, add suffix "-230" to model number and \$25.00 to price. (For models in case sizes H11 and H16, add \$40.00.) The "-230" option requires two additional days.



WIDE ADJUST OUTPUT (continued)

LINEAR REGULATED

fixed & adjustable current limiting

GOLD BOX MODELS


Output Voltage Range	Output Current Amps. at			Voltage Prgmg. Coeff. (Ω/V)	Case Size	Voltage Programmable Fixed Current Limiting		Voltage Programmable Adjust. Current Limiting	
	40°C	55°C	71°C			Model	Price(\$)	Model	Price(\$)
0-6	1.2	1.2	1.2	820	M6	A06MX120	165	P06MX120	185
0-6	2.0	2.0	2.0	820	M6	A06MX200	185	P06MX200	205
0-6	3.0	2.5	2.0	820	M6	A06MX300	215	P06MX300	235
0-6	5.0	4.0	3.0	820	M9	A06MX500	260	P06MX500	280
0-6	8.0	7.0	6.0	820	M13	A06MX800	300	P06MX800	320
0-6	12.0	10.0	7.0	820	H11	A06HX1200	385	P06HX1200	405
0-6	16.0	13.0	10.0	820	H16	A06HX1600	460	P06HX1600	480
0-15	1.0	1.0	1.0	330	M6	A015MX100	155	P015MX100	175
0-15	2.0	1.6	1.2	330	M6	A015MX200	205	P015MX200	225
0-15	3.0	2.4	1.8	330	M9	A015MX300	260	P015MX300	280
0-15	5.0	4.0	2.5	330	M13	A015MX500	300	P015MX500	320
0-15	8.0	6.0	4.0	330	H11	A015HX800	400	P015HX800	420
0-15	10.0	8.0	6.0	330	H16	A015HX1000	460	P015HX1000	480
0-30	.50	.50	.50	160	M6	A030MX50	175	P030MX50	195
0-30	1.0	1.0	1.0	160	M6	A030MX100	205	P030MX100	225
0-30	1.6	1.4	1.2	160	M9	A030MX160	245	P030MX160	265
0-30	2.5	2.0	1.5	160	M13	A030MX250	295	P030MX250	315
0-30	4.0	3.0	2.0	160	H11	A030HX400	410	P030HX400	430
0-30	5.0	4.0	3.0	160	H16	A030HX500	475	P030HX500	495
0-50	.35	.34	.33	1000	M6	A050MX35	195	P050MX35	215
0-50	.60	.50	.40	1000	M6	A050MX60	245	P050MX60	265
0-50	.85	.75	.65	1000	M9	A050MX85	285	P050MX85	305
0-50	1.2	.96	.72	1000	M13	A050MX120	340	P050MX120	365
0-50	2.4	1.9	1.4	1000	H11	A050HX240	455	P050HX240	480
0-50	3.0	2.4	1.8	1000	H16	A050HX300	535	P050HX300	560
0-100	.10	.09	.08	500	M6	A0100MX10	245	P0100MX10	265
0-100	.25	.20	.15	500	M6	A0100MX25	285	P0100MX25	305
0-100	.45	.36	.27	500	M9	A0100MX45	330	P0100MX45	355
0-100	.60	.48	.36	500	M13	A0100MX60	385	P0100MX60	410
0-100	1.2	.96	.72	500	H11	A0100HX120	500	P0100HX120	525
0-100	1.5	1.2	.90	500	H16	A0100HX150	575	P0100HX150	600

NARROW PROFILE MODELS (for limited space applications)

Output Voltage Range	Output Current Amps. (to +71°C)	Voltage Prgmg. Coeff. (Ω/V)	Case Size	Model	(\$ Price)
0-7*	1.0	700	N8T	A07XN100	155
0-7*	2.1	700	N8H	A07NX210	190
0-18*	.400	270	N8T	A018XN40	150
0-18*	1.0	270	N8H	A018NX100	180
0-32*	.250	150	N8T	A032XN25	135
0-32*	.600	150	N8H	A032NX60	180
0-60*	.125	820	N8T	A060NX12	160
0-60*	.250	820	N8H	A060NX25	200
0-150*	.050	330	N8T	A0150NX05	190
0-150*	.100	330	N8H	A0150NX10	230

* Not CE certified.

Gold Box

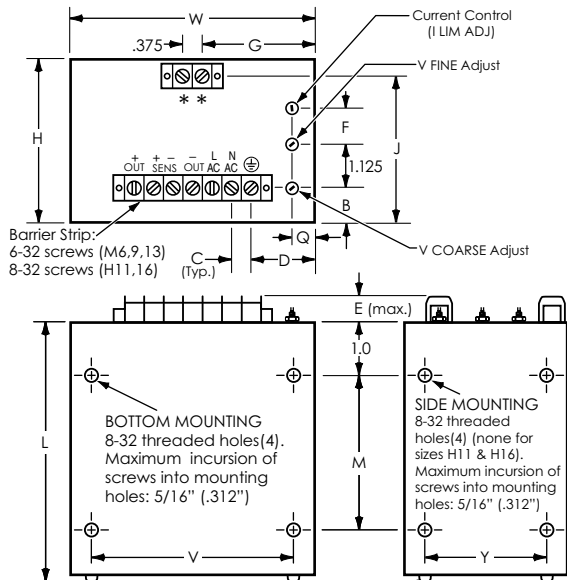


** Connections for Remote Current Control

For REAR MOUNTING, remove original screws(4) and use 8-32 Type F self-tapping screws. They should extend at least 5/16" (.312") into the power supply case.

Case Size	L	W	H	M	V	Y	E	Q	B	C	D	F	G	J	Approx. Weight
M6	6.59	5.12	3.44	4.0	4.5	3.0	.58	.5	.75	.375	1.44	.75	2.37	3.09	4 lb. 4 oz.
M9	9.25	5.12	3.44	6.0	4.5	3.0	.58	.5	.75	.375	1.44	.75	2.37	3.09	7 lb. 4 oz.
M13	13.25	5.12	3.44	10.0	4.5	3.0	.58	.5	.75	.375	1.44	.75	2.37	3.09	11 lb.
H11	11.25	7.37	5.12	8.0	6.75	4.56	.78	1.12	1.25	.562	2.25	1.12	3.75	4.72	18 lb. 4 oz.
H16	16.00	7.37	5.12	11.0	6.75	4.56	.78	1.12	1.25	.562	2.25	1.12	3.75	4.72	23 lb.

Narrow Profile

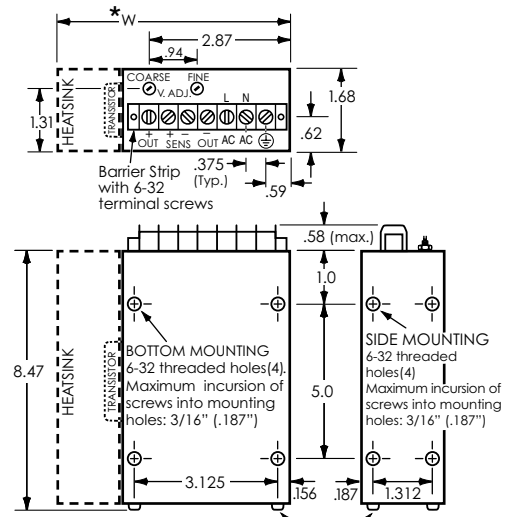

For REAR MOUNTING, remove 6-32 screws (4). These screws may then be used for mounting, provided they extend at least 1/4" (.250) into the power supply case.

Case Size	W*	Approx. Weight
N8T	3.84	3 lb. 2 oz.
N8H	4.68	3 lb. 14 oz.

*W dimension includes TRANSISTOR on N8T case and HEATSINK on N8H case.



It's easy to find what you need at www.acopian.com or www.find a power supply.com
 P.O. Box 638, Easton, PA 18044 • Phone: (610) 258-5441 • FAX: (610) 258-2842



Gold Box & Narrow Profile DUAL TRACKING OUTPUTS

LINEAR REGULATED
AC-DC

- Shipped Within 3 Days
- All Models U.L. Recognized
- **CE** (Gold Box models)
- Five Year Warranty



Narrow Profile

Gold Box

These dual output power supplies are a convenient source of the tracking voltages required for powering operational amplifiers and related circuits. Their positive/common/negative output terminal configuration

minimizes system wiring. Provision for remote sensing permits compensation of load line effects. Although moderately priced, they are sturdily constructed and conservatively rated.

SPECIFICATIONS

Input Voltage: 105-125 VAC, 50-400 Hz, single phase.

Output Voltages: Tracking within 1%.

Load Regulation: $\pm 0.1\%$.

Line Regulation: $\pm 0.1\%$.

Ripple: 1.5 mV rms.

Polarity: Positive output, common, and negative output.

Remote Voltage Sensing: Standard.

Overload/Short Circuit Protection: Electronic current limiting.

Temperature Coefficient: 0.02%/°C (Typical).

Ambient Operating Temperature: -10 to +71°C.

Storage Temperature: -55 to +85°C.

Dimensions: See page 29 for case dimensions.

Mounting: Threaded mounting holes permit mounting to a chassis, cabinet wall or bracket. To mount from the power supply side of the mounting surface or for DIN rail mounting, see accessory Mounting Kits on page 37.

OPTIONS

Overvoltage Protection: A built-in preset overvoltage protection circuit is available on all models. If either output fails, both outputs are 'crowbarred'. To order, add prefix "V" to the model number, and increase standard price by \$30.00.

Terminal Strip Cover: Clips on. To order, add suffix "M" to model number and \$5.00 to price.

230 Volt Input: All models can be alternately furnished for operation on inputs of 210-250 VAC, 50-400 Hz. To order, add suffix "-230" to model number and \$25.00 to price. The "-230" option requires two additional days.

GOLD BOX MODELS

Nominal Output Voltages	Adjust Range $\pm V$	Amps. per Output at			(\$) Price	Model	Case Size
		40°C	55°C	71°C			
± 5	.5	.750	.650	.550	190	TD5-75	TG5
± 5	.5	1.5	1.25	1.0	225	TD5-150	TG6
± 5	.5	2.5	2.0	1.5	270	TD5-250	TG9
± 12	1	1.0	.900	.800	195	TD12-100	TG5
± 12	1	1.6	1.4	1.0	230	TD12-160	TG6
± 12	1	2.5	2.0	1.5	270	TD12-250	TG9
± 12	.5	4.5	3.7	3.0	335	TD12-450	TG13
± 12	.5	8.5	7.0	5.5	440	TD12-850	TH11
± 15	1	.400	.400	.400	150	TD15-40	TG5
± 15	1	1.0	.900	.800	195	TD15-100	TG5
± 15	1	1.6	1.4	1.0	230	TD15-160	TG6
± 15	1	2.5	2.0	1.5	270	TD15-250	TG9
± 15	.5	4.5	3.7	3.0	335	TD15-450	TG13
± 15	.5	8.5	7.0	5.5	440	TD15-850	TH11


FRONT COVER CONNECTIONS: $\begin{matrix} \text{COM} & \text{L} & \text{N} \\ \downarrow & \downarrow & \downarrow \\ +V & +S & -S & -V & AC & AC & \oplus \end{matrix}$
(See page 29 for complete drawing.)

NARROW PROFILE MODELS (for limited space applications)

Nominal Output Voltages	Adjust Range $\pm V$	Amps. per Output at			(\$) Price	Model	Case Size
		40°C	55°C	71°C			
$\pm 12^*$	1	.500	.500	.400	165	FD12-50A	TN6T
$\pm 12^*$.5	1.0	.900	.800	220	LD12-100	TN8H
$\pm 15^*$	1	.500	.500	.400	165	FD15-50A	TN6T
$\pm 15^*$.5	1.0	.900	.800	220	LD15-100	TN8H

* Not CE certified.

See page 29 for complete drawing.

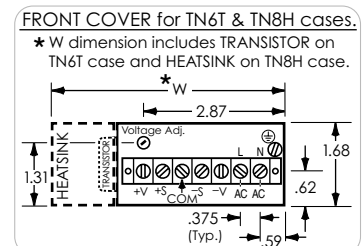




Gold Box
DUAL ISOLATED OUTPUTS
(User-selectable)
 LINEAR REGULATED
 AC-DC

- Shipped Within 3 Days
- All Models U.L. Recognized
- Five Year Warranty



Acopian general purpose duals furnish two completely independent outputs, either identical or different, in less space and at less cost than two equivalent single output supplies. Thousands of output voltage/current rating combinations are available. Mounting and system wiring are simplified. Quality components, generously derated, insure long-term reliability.

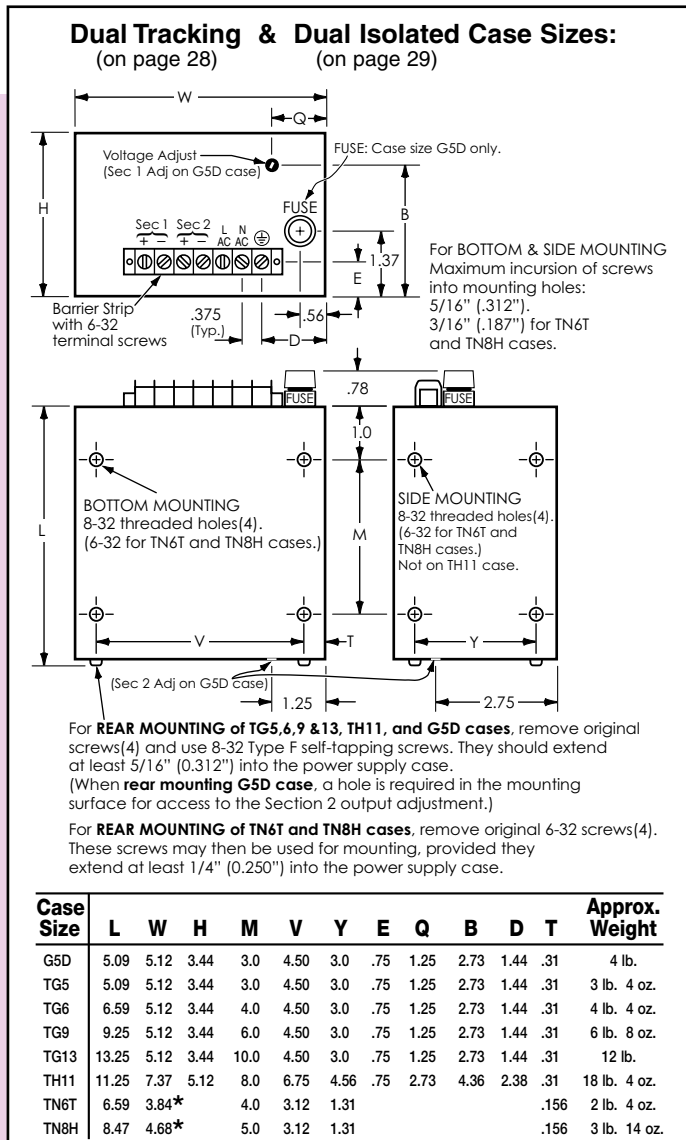

HOW TO ORDER: Select two **sections** (from the same table) on pages 30 and 31. The complete model number is the combination of the two **sections** selected. Example: The combination of section 5GT20D and section 8GT50D is Model 5GT20D-8GT50D. Always assign the lower voltage section first. (Two of the same section can also be selected.) For pricing purposes, add the costs of the individual sections selected.

- SPECIFICATIONS**
- Input Voltage:** 105-125 VAC, 50-400 Hz, single phase.
 - Output Specifications:** See pages 30 and 31.
 - Short Circuit Protection:** Delivers current surges without damage—built-in fuse protects supply against prolonged overloads and shorts.
 - Polarity:** Outputs are floating. Each output may be independently connected to provide any combination of positive and negative voltages. Outputs may be floated up to 300 volts above ground.
 - Temperature Coefficient:** 0.02%/°C (Typical).
 - Ambient Operating Temperature:** -10 to +71°C. No derating required.
 - Storage Temperature:** -55 to +85°C.

- Case size:** G5D.
- Mounting:** Threaded mounting holes permit mounting to a chassis, cabinet wall or bracket. To mount from the power supply side of the mounting surface or for DIN rail mounting, see accessory Mounting Kits on page 37.

- OPTIONS**
- Overvoltage Protection:** Two separate, preset overvoltage protection circuits, one for each output. To order, add prefix "V" to model number and add \$30.00 to the standard price for 1.5 to 70 volt outputs; add \$50.00 if either or both outputs are greater than 70 volts.
 - Terminal Strip Cover:** Clips on. To order, add suffix "M" to model number and \$5.00 to price.
 - 230 Volt Input:** All models can be alternately furnished for operation on inputs of 210-250 VAC, 50-400 Hz. To order, add suffix "-230" to model number and \$25.00 to the standard price. The "-230" option requires two additional days.



DUAL ISOLATED OUTPUTS (continued)

Gold Box
User-selectable

(OUTPUTS TO 500 MA)

Nominal Output Voltage	Adjust Range ± V	Output Current Amps.	Regulation		Ripple mV RMS	(see 'How to Order')	
			Load ± %	Line ± %		Price per Section (\$)	Section
1.5	.5	.200	.4	.05	1	80	1.5GT20D
1.5	.5	.400	.5	.1	1	90	1.5GT40D
2.5	.5	.200	.4	.05	1	80	2.5GT20D
2.5	.5	.400	.5	.1	1	90	2.5GT40D
3	.5	.200	.3	.05	1	80	3GT20D
3	.5	.400	.5	.1	1	90	3GT40D
3.3	.5	.200	.2	.05	1	80	3.3GT20D
3.3	.5	.400	.3	.1	1	90	3.3GT40D
5	.5	.200	.2	.05	1	80	5GT20D
5	.5	.500	.3	.05	1	90	5GT50D
6	1	.200	.05	.05	1	80	6GT20D
6	1	.500	.15	.05	1	90	6GT50D
7	1	.200	.05	.05	1	80	7GT20D
7	1	.500	.15	.05	1	90	7GT50D
8	1	.200	.05	.05	1	80	8GT20D
8	1	.500	.1	.05	1	90	8GT50D
9	1	.200	.05	.05	1	80	9GT20D
9	1	.500	.1	.05	1	90	9GT50D
10	1	.250	.05	.05	1	80	10GT25D
10	1	.500	.1	.05	1	90	10GT50D
11	1	.250	.05	.05	1	80	11GT25D
11	1	.500	.1	.05	1	90	11GT50D
12	1	.250	.05	.05	1	80	12GT25D
12	1	.500	.1	.05	1	90	12GT50D
13	1	.250	.05	.05	1	80	13GT25D
13	1	.500	.1	.05	1	90	13GT50D
15	1	.250	.05	.05	1	80	15GT25D
15	1	.500	.1	.05	1	90	15GT50D
16	1	.250	.05	.05	1	80	16GT25D
16	1	.500	.1	.05	1	90	16GT50D
17	1	.250	.05	.05	1	80	17GT25D
17	1	.500	.1	.05	1	90	17GT50D
18	1	.250	.05	.05	1	80	18GT25D
18	1	.500	.1	.05	1	90	18GT50D
19	1	.250	.05	.05	1	80	19GT25D
19	1	.500	.1	.05	1	90	19GT50D
20	1	.250	.05	.05	1	80	20GT25D
20	1	.500	.1	.05	1	90	20GT50D
21	1	.250	.05	.05	1	80	21GT25D
21	1	.500	.1	.05	1	90	21GT50D
22	1	.250	.05	.05	1	80	22GT25D
22	1	.500	.1	.05	1	90	22GT50D
23	1	.250	.05	.05	1	80	23GT25D
23	1	.500	.1	.05	1	90	23GT50D
24	1	.250	.05	.05	1	80	24GT25D
24	1	.500	.05	.05	1	90	24GT50D
25	1	.250	.05	.05	1	80	25GT25D
25	1	.500	.05	.05	1	90	25GT50D
26	1	.250	.05	.05	1	80	26GT25D
26	1	.400	.05	.05	1	90	26GT40D
28	1	.250	.05	.05	1	80	28GT25D
28	1	.400	.05	.05	1	90	28GT40D
30	1	.250	.05	.05	1	80	30GT25D
30	1	.400	.05	.05	1	90	30GT40D
31	1	.100	.05	.05	1	80	31GT10D
31	1	.300	.05	.05	1	90	31GT30D
32	1	.100	.05	.05	1	80	32GT10D
32	1	.300	.05	.05	1	90	32GT30D
33	1	.100	.05	.05	1	80	33GT10D
33	1	.300	.05	.05	1	90	33GT30D

Nominal Output Voltage	Adjust Range ± V	Output Current Amps.	Regulation		Ripple mV RMS	(see 'How to Order')	
			Load ± %	Line ± %		Price per Section (\$)	Section
34	1	.100	.05	.05	1	80	34GT10D
34	1	.300	.05	.05	1	90	34GT30D
35	1	.100	.05	.05	1	80	35GT10D
35	1	.200	.05	.05	1	90	35GT20D
36	1	.100	.05	.05	1	80	36GT10D
36	1	.200	.05	.05	1	90	36GT20D
38	1	.100	.05	.05	1	80	38GT10D
38	1	.200	.05	.05	1	90	38GT20D
40	1	.100	.05	.05	1	80	40GT10D
40	1	.200	.05	.05	1	90	40GT20D
42	1	.100	.05	.05	1	80	42GT10D
42	1	.200	.05	.05	1	90	42GT20D
44	1	.100	.05	.05	1	80	44GT10D
44	1	.200	.05	.05	1	90	44GT20D
45	1	.100	.05	.05	1	80	45GT10D
45	1	.200	.05	.05	1	90	45GT20D
46	1	.100	.05	.05	1	80	46GT10D
46	1	.200	.05	.05	1	90	46GT20D
48	1	.100	.05	.05	1	85	48GT10D
48	1	.200	.05	.05	1	95	48GT20D
50	1	.100	.05	.05	1	85	50GT10D
50	1	.200	.05	.05	1	95	50GT20D
52	1	.100	.05	.05	1	90	52GT10D
52	1	.200	.05	.05	1	100	52GT20D
54	1	.100	.05	.05	1	90	54GT10D
54	1	.200	.05	.05	1	100	54GT20D
55	1	.100	.05	.05	1	90	55GT10D
55	1	.200	.05	.05	1	100	55GT20D
56	1	.050	.05	.05	1	90	56GT05D
56	1	.100	.05	.05	1	100	56GT10D
58	1	.050	.05	.05	1	90	58GT05D
58	1	.100	.05	.05	1	100	58GT10D
60	1	.050	.05	.05	1	90	60GT05D
60	1	.100	.05	.05	1	100	60GT10D
62	1	.050	.05	.05	1	90	62GT05D
62	1	.100	.05	.05	1	100	62GT10D
64	1	.050	.05	.05	1	90	64GT05D
64	1	.100	.05	.05	1	100	64GT10D
65	1	.050	.05	.05	1	90	65GT05D
65	1	.100	.05	.05	1	100	65GT10D
67	1	.050	.05	.05	1	90	67GT05D
67	1	.100	.05	.05	1	100	67GT10D
68	1	.050	.05	.05	1	90	68GT05D
68	1	.100	.05	.05	1	100	68GT10D
69	1	.050	.05	.05	1	90	69GT05D
69	1	.100	.05	.05	1	100	69GT10D
70	1	.050	.05	.05	1	90	70GT05D
70	1	.100	.05	.05	1	100	70GT10D
75	1	.050	.05	.05	1	90	75GT05D
75	1	.100	.05	.05	1	100	75GT10D
76	1	.020	.05	.05	1	90	76GT02D
76	1	.050	.05	.05	1	100	76GT05D
80	1	.020	.05	.05	1	90	80GT02D
80	1	.050	.05	.05	1	100	80GT05D
85	1	.020	.05	.05	1	95	85GT02D
85	1	.050	.05	.05	1	105	85GT05D
90	1	.020	.05	.05	1	95	90GT02D
90	1	.050	.05	.05	1	105	90GT05D
95	1	.020	.05	.05	1	100	95GT02D
95	1	.050	.05	.05	1	110	95GT05D
100	1	.020	.05	.05	1	105	100GT02D
100	1	.050	.05	.05	1	115	100GT05D



DUAL ISOLATED OUTPUTS (continued)

Gold Box
User-selectable

(OUTPUTS TO 2 AMPS.)

Nominal Output Voltage	Adjust Range ± V	Output Current Amps.	Regulation		Ripple mV RMS	(see 'How to Order')	
			Load ± %	Line ± %		Price per Section (\$)	Section
1.5	.5	.400	.5	.1	1	90	1.5GT40D
2.5	.5	.400	.5	.1	1	90	2.5GT40D
3	.5	.400	.5	.1	1	90	3GT40D
3	.5	.700	.5	.1	1	95	3GT70D
3	.5	1.0	.5	.1	1	100	3GT100D
3.3	.5	.400	.3	.1	1	90	3.3GT40D
3.3	.5	.700	.4	.1	1	95	3.3GT70D
3.3	.5	1.0	.5	.1	1	100	3.3GT100D
5	.5	.500	.3	.05	1	90	5GT50D
5	.5	.700	.4	.05	1	95	5GT70D
5	.5	1.0	.5	.05	1	100	5GT100D
5	.25	2.0	.5	.05	1	115	5GT200D
6	1	.500	.15	.05	1	90	6GT50D
6	.5	.700	.2	.05	1	95	6GT70D
6	.5	1.0	.3	.05	1	100	6GT100D
7	1	.500	.15	.05	1	90	7GT50D
7	.5	.700	.2	.05	1	95	7GT70D
7	.5	1.0	.3	.05	1	100	7GT100D
8	1	.500	.1	.05	1	90	8GT50D
8	.5	.700	.15	.05	1	95	8GT70D
8	.5	1.0	.2	.05	1	100	8GT100D
9	1	.500	.1	.05	1	90	9GT50D
9	.5	.700	.15	.05	1	95	9GT70D
9	.5	1.0	.2	.05	1	100	9GT100D
10	1	.500	.1	.05	1	90	10GT50D
10	.5	.700	.15	.05	1	95	10GT70D
10	.5	1.0	.2	.05	1	100	10GT100D
12	1	.500	.1	.05	1	90	12GT50D
12	.5	.700	.1	.05	1	95	12GT70D
12	.5	1.0	.1	.05	1	100	12GT100D
14	1	.500	.1	.05	1	90	14GT50D
14	.5	.700	.1	.05	1	95	14GT70D
14	.5	1.0	.1	.05	1	100	14GT100D
15	1	.500	.1	.05	1	90	15GT50D
15	.5	.700	.1	.05	1	95	15GT70D
15	.5	1.0	.1	.05	1	100	15GT100D
16	1	.500	.1	.05	1	90	16GT50D
16	.5	.700	.1	.05	1	95	16GT70D
16	.5	1.0	.1	.05	1	105	16GT100D
18	1	.500	.1	.05	1	90	18GT50D
18	.5	.700	.1	.05	1	95	18GT70D
18	.5	1.0	.1	.05	1	105	18GT100D
19	1	.500	.1	.05	1	90	19GT50D
19	.5	.750	.1	.05	1	100	19GT75D
20	1	.500	.1	.05	1	90	20GT50D
20	.5	.750	.1	.05	1	100	20GT75D

(90 TO 150 VOLTS)

Nominal Output Voltage	Adjust Range ± V	Output Current Amps.	Regulation		Ripple mV RMS	(see 'How to Order')	
			Load ± %	Line ± %		Price per Section (\$)	Section
90	1	.050	.05	.05	1	105	90GT05D
90	1	.100	.05	.05	1	120	90GT10D
95	1	.050	.05	.05	1	110	95GT05D
95	1	.100	.05	.05	1	125	95GT10D
100	1	.050	.05	.05	1	115	100GT05D
100	1	.100	.05	.05	1	130	100GT10D
105	1	.050	.05	.05	1	115	105GT05D
105	1	.100	.05	.05	1	130	105GT10D
110	1	.050	.05	.05	1	120	110GT05D
110	1	.100	.05	.05	1	135	110GT10D
115	1	.050	.05	.05	1	120	115GT05D
115	1	.100	.05	.05	1	135	115GT10D
120	1	.050	.05	.05	1	125	120GT05D
120	1	.100	.05	.05	1	140	120GT10D
125	1	.050	.05	.05	1	130	125GT05D
125	1	.100	.05	.05	1	145	125GT10D
130	1	.050	.05	.05	1	130	130GT05D
130	1	.100	.05	.05	1	145	130GT10D
135	1	.050	.05	.05	1	130	135GT05D
135	1	.100	.05	.05	1	145	135GT10D
140	1	.050	.05	.05	1	130	140GT05D
140	1	.100	.05	.05	1	145	140GT10D
145	1	.050	.05	.05	1	130	145GT05D
145	1	.100	.05	.05	1	145	145GT10D
150	1	.050	.05	.05	1	130	150GT05D
150	1	.100	.05	.05	1	145	150GT10D





Gold Box
DUAL ISOLATED OUTPUTS
(5v/12v combinations)
 LINEAR REGULATED
 AC-DC

- Shipped Within 3 Days
- All Models U.L. Recognized
- CE
- Five Year Warranty



Dual isolated output power supplies may be connected to provide any desired arrangement of positive and negative output voltages. Each voltage is

independently adjustable. No derating is required up to +60°C. A separate overvoltage protector on each output is available as a built-in option.

SPECIFICATIONS

Input Voltage: 105-125 VAC, 50-400 Hz, single phase.

Polarity: Outputs are floating. Each may be independently connected to provide any combination of positive and negative voltages. Outputs may be floated up to 300 volts above ground.

Temperature Coefficient: 0.02%/°C (Typical).

Ambient Operating Temperature: -10 to +60°C.
 No derating required.

Storage Temperature: -55 to +85°C.

Mounting: Threaded mounting holes permit mounting to a chassis, cabinet wall or bracket. To mount from the power supply side of the mounting surface or for DIN rail mounting, see accessory Mounting Kits on page 37.


OPTIONS

Overvoltage Protection: Two separate, preset overvoltage protection circuits, one for each output. To order, add prefix "V" to model number and add \$45.00 to the standard price.

Terminal Strip Cover: Clips on. To order, add suffix "M" to model number and \$5.00 to price.

230 Volt Input: All models can be alternately furnished for operation on inputs of 210-250 VAC, 50-400 Hz. To order, add suffix "-230" to model number and \$25.00 to the standard price. The "-230" option requires two additional days.

Nominal Output Voltages	Adjust Range ± V	Output Current Amps.	Regulation		Ripple mV RMS	(\$)	Model	Case Size
			Load ± %	Line ± %				
5 12	.25 1	2.0 .600	.15 .15	.15 .15	1 1	195	512D5A	DG5
5 12	.25 1	3.0 1.2	.15 .15	.15 .15	1 1	225	512D6A	DG6
5 12	.25 1	6.0 2.4	.15 .15	.15 .15	1 1	275	512D9A	DG9

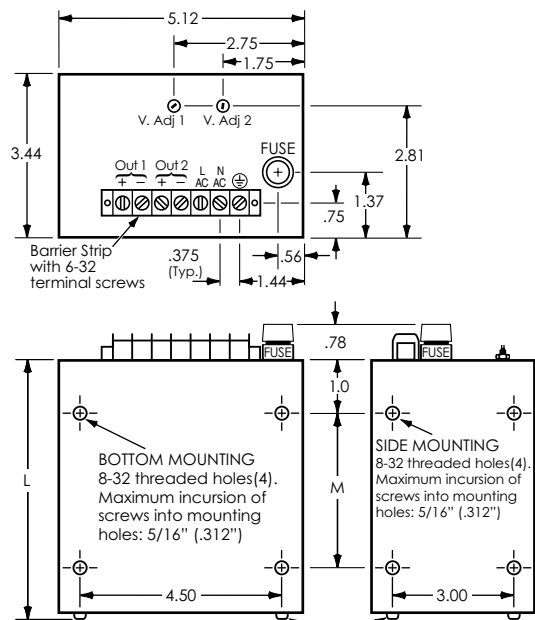

For REAR MOUNTING, remove original screws(4) and use 8-32 Type F self-tapping screws. They should extend at least 5/16" (0.312") into the power supply case.

Case Size	L	M	Approx. Weight
DG5	5.09	3.0	4 lb.
DG6	6.59	4.0	4 lb. 4 oz.
DG9	9.25	6.0	6 lb. 8 oz.





Gold Box
TRIPLE ISOLATED OUTPUTS
 LINEAR REGULATED
 AC-DC

- Shipped Within 3 Days
- All Models U.L. Recognized
- CE
- Five Year Warranty



Triple isolated output power supplies provide the features and characteristics of three supplies in one compact, easy-to-use package. They are available in the voltage combinations most frequently required for driving microprocessors and associated circuitry.

SPECIFICATIONS


Input Voltage: 105-125 VAC, 50-400 Hz, single phase.
Polarity: Outputs are floating. Each output may be independently connected to provide any combination of positive and negative voltages. Outputs may be floated up to 300 volts above ground.
Temperature Coefficient: 0.02%/°C (Typical).
Ambient Operating Temperature: -10 to +60°C. No derating required.
Storage Temperature: -55 to +85°C.
Accessory Mounting Kits: See page 37.

OPTIONS

Overvoltage Protection: Separate overvoltage protection circuit on each output. Add prefix "3V" to model number and increase standard price as follows:
 Case sizes GT5 - GT13 . . . \$45.00
 Case size HT1165.00
 Case size HT1695.00

Terminal Strip Cover: Clips on. To order, add suffix "M" to model number and \$5.00 to price.
230 Volt Input: Add suffix "-230" to the model number and \$25.00 to the price. Requires two additional days.

Nominal Output Voltages	Adjust Range ± V	Output Current Amps.	Regulation		Ripple mV RMS	(\$) Price	Model	Case Size
			Load ± %	Line ± %				
5	.25	3.0	.15	.15	1	240	5512T6A	GT6
5	.25	1.0	.15	.15	1			
12	1	.600	.15	.15	1			
5	.25	6.0	.15	.15	1	295	5512T9A	GT9
5	.25	2.0	.15	.15	1			
12	1	1.2	.15	.15	1			
5	.25	6.0	.15	.15	1	295	5912T9A	GT9
9	1	1.4	.15	.15	1			
12	1	1.2	.15	.15	1			
5	.25	2.0	.15	.15	1	215	51212T5A	GT5
12	1	.300	.15	.15	1			
12	1	.300	.15	.15	1			
5	.25	3.0	.15	.15	1	240	51212T6A	GT6
12	1	.600	.15	.15	1			
12	1	.600	.15	.15	1			
5	.25	6.0	.15	.15	1	295	51212T9A	GT9
12	1	1.2	.15	.15	1			
12	1	1.2	.15	.15	1			
5	.25	8.0	.15	.15	1	335	51212T13A	GT13
12	1	1.3	.15	.15	1			
12	1	1.3	.15	.15	1			
5	.5	15.0	.15	.15	1	410	51212T11A	HT11
12	1	2.0	.15	.15	1			
12	1	2.0	.15	.15	1			

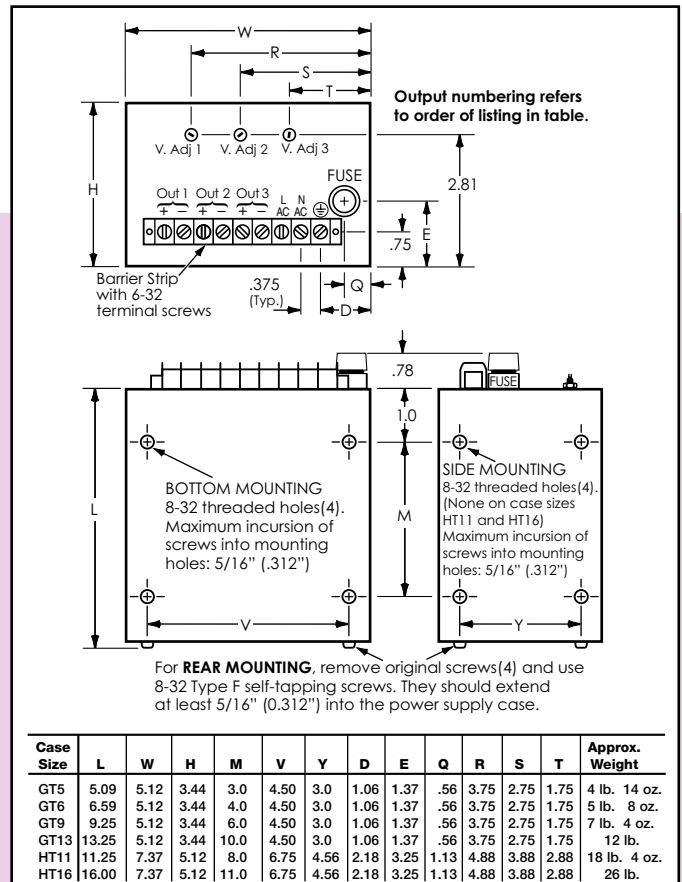

Nominal Output Voltages	Adjust Range ± V	Output Current Amps.	Regulation		Ripple mV RMS	(\$) Price	Model	Case Size
			Load ± %	Line ± %				
5	.5	20.0	.15	.15	1	470	51212T16A	HT16
12	1	3.0	.15	.15	1			
12	1	3.0	.15	.15	1			
5	.25	2.0	.15	.15	1	215	51515T5A	GT5
15	1	.250	.15	.15	1			
15	1	.250	.15	.15	1			
5	.25	3.0	.15	.15	1	240	51515T6A	GT6
15	1	.500	.15	.15	1			
15	1	.500	.15	.15	1			
5	.25	6.0	.15	.15	1	295	51515T9A	GT9
15	1	1.0	.15	.15	1			
15	1	1.0	.15	.15	1			
5	.25	8.0	.15	.15	1	335	51515T13A	GT13
15	1	1.1	.15	.15	1			
15	1	1.1	.15	.15	1			
5	.5	15.0	.15	.15	1	410	51515T11A	HT11
15	1	1.5	.15	.15	1			
15	1	1.5	.15	.15	1			
5	.5	20.0	.15	.15	1	470	51515T16A	HT16
15	1	2.5	.15	.15	1			
15	1	2.5	.15	.15	1			





Gold Box UNREGULATED

AC-DC
single output & wide adjust output

- Shipped Within 3 Days
- U.L. Recognized
- Five Year Warranty



Models in case size YA have output voltage adjustment on rear panel.

Low-cost DC power suitable for driving loads such as lamps, relays, and small motors is provided by these unregulated power supplies. All components are generously derated, insuring a long and trouble-free life; built-in fusing prevents damage due to prolonged

overloading or short circuits. Mechanically similar to the regulated supplies shown on pages 20 and 21, they are housed in extruded aluminum cases which can be mounted in any position. Many models are U.L. Recognized.

STANDARD FEATURES

- Capacitive filtering
- Fused input
- May be used in series or parallel
- No derating or heat sinking required
- Completely serviceable

SPECIFICATIONS

Input Voltage: 0-125 VAC, 50-400 Hz, single phase.

Output Voltage Adjustment: Adjustable voltage models are provided with a built-in continuously adjustable autotransformer.

Load Regulation: The nominal output voltages of single output models, and the maximum rated output voltages for models with wide adjust outputs, are based on 115 VAC input with approximately one-half load. At no load, they will increase by approximately 10%. At full load, they will be reduced by approximately 10%.

Line Regulation: Output voltage change due to line change directly proportional to input change.

Polarity: Output is floating; either positive or negative terminal may be grounded or floated up to 300 volts above ground.


Ambient Operating Temperature: -10 to +65°C.
No derating required.

Storage Temperature: -55 to +85°C.

OPTIONS

Terminal Strip Cover: Clips on. To order, add suffix "M" to model number and \$5.00 to price.

230 Volt Input: Provision for inputs of 0-250 VAC, 50-400 Hz, replacing the standard 0-125 VAC input voltage range, is available on most models. Contact factory for information.

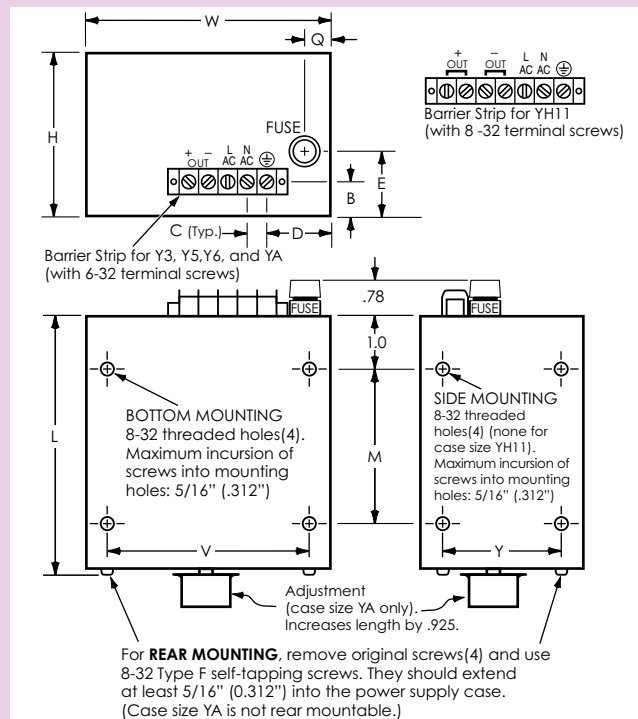

Case Size	L	W	H	M	V	Y	Q	E	B	D	C	Approx. Weight
Y3	3.71	5.12	3.44	1.62	4.5	3.0	.56	1.37	.75	1.44	.375	2 lb. 8 oz.
Y5	5.09	5.12	3.44	3.0	4.5	3.0	.56	1.37	.75	1.44	.375	4 lb. 8 oz.
Y6	6.59	5.12	3.44	4.0	4.5	3.0	.56	1.37	.75	1.44	.375	7 lb. 8 oz.
YH11	11.25	7.37	5.12	8.0	6.75	4.56	1.10	2.64	1.25	2.25	.562	18 to 23 lb.
YA	6.59	5.12	3.44	4.0	4.5	3.0	.56	1.37	.75	1.44	.375	4 to 5 lb.

Mounting: Threaded mounting holes permit mounting to a chassis, cabinet wall or bracket, or they may be used on a test bench or tabletop. To mount from the power supply side of the mounting surface or for DIN rail mounting, see accessory Mounting Kits on page 37.



SINGLE OUTPUT

Nominal Output Voltage	Output Current Amps.	Output Voltage N/L-F/L	Ripple Volts RMS	(\$) Price	Model	Case Size
4	.200	4.4 to 3.6	.2	70	U4Y20	Y3
5	10.0 (@ 5.0)	6.7 to 3.6 (5.0)	1.8 (1.3)	105	U5Y1000	Y6
6	2.0	7.7 to 4.8	2.0	70	U6Y200	Y3
6	5.0	7.5 to 5.0	1.8	105	U6Y500	Y5
7	8.0	8.0 to 5.4	1.5	105	U7Y800	Y6
9	10.0 (@ 5.0)	11.5 to 7.5 (9.0)	2.3 (1.3)	105	U9Y1000	Y6
10	10.0 (@ 5.0)	12.4 to 8.0 (9.8)	2.3 (1.3)	105	U10Y1000	Y6
12	1.5	14.9 to 10.9	2.5	70	U12Y150	Y3
12	5.0	14.8 to 10.5	1.8	100	U12Y500	Y5
12	10.0 (@ 5.0)	14.1 to 9.8 (11.5)	2.3 (1.3)	110	U12Y1000	Y6
14	1.0	15.4 to 12.6	.7	70	U14Y100	Y3
14	10.0 (@ 5.0)	16.4 to 12.1 (14.0)	2.3 (1.3)	110	U14Y1000	Y6
15	10.0 (@ 5.0)	17.2 to 12.8 (14.5)	2.3 (1.3)	110	U15Y1000	Y6
16	1.0	17.6 to 14.4	.7	70	U16Y100	Y3
16	10.0 (@ 5.0)	18.8 to 14.2 (16.0)	2.3 (1.3)	110	U16Y1000	Y6
18	1.0	19.8 to 16.2	.7	70	U18Y100	Y3
18	10.0 (@ 5.0)	21.0 to 15.8 (18.0)	2.4 (1.4)	110	U18Y1000	Y6
20	4.0	22.0 to 17.5	2.0	100	U20Y400	Y5
20	10.0 (@ 5.0)	23.7 to 18.3 (20.4)	2.4 (1.4)	110	U20Y1000	Y6
24	1.0	26.4 to 21.6	1.7	70	U24Y100	Y3
24	3.5	26.0 to 21.0	2.0	100	U24Y350	Y5
24	5.0	26.5 to 21.0	2.5	110	U24Y500	Y6
24	10.0	26.8 to 21.4	2.4	135	U24Y1000	Y6
24	17.0	26.4 to 21.6	1.5	235	U24Y1700	YH11
24	23.0	27.0 to 21.0	1.5	265	U24Y2300	YH11
25	5.0	28.1 to 22.3	2.5	110	U25Y500	Y6
27	5.0	30.0 to 24.0	2.6	110	U27Y500	Y6
28	1.0	30.8 to 25.2	1.7	70	U28Y100	Y3
28	3.0	30.8 to 26.0	2.0	100	U28Y300	Y5
28	5.0	31.2 to 24.8	2.6	110	U28Y500	Y6
28	8.0	30.2 to 25.0	2.4	135	U28Y800	Y6
28	15.0	30.8 to 25.2	1.5	235	U28Y1500	YH11
28	20.0	30.4 to 24.5	1.5	265	U28Y2000	YH11
30	2.0	33.0 to 27.0	1.5	95	U30Y200	Y5
32	.400	35.2 to 28.8	.6	70	U32Y40	Y3
32	5.0	35.5 to 28.0	3.3	115	U32Y500	Y6
35	5.0	38.0 to 30.0	3.3	115	U35Y500	Y6
37	5.0	40.5 to 32.2	3.3	115	U37Y500	Y6
38	5.0	43.0 to 34.0	3.3	115	U38Y500	Y6
40	1.0	44.0 to 36.0	1.6	80	40UY100	Y3
40	2.0	44.0 to 36.0	1.5	100	U40Y200	Y5
40	5.0	45.0 to 37.0	3.3	115	U40Y500	Y6

Nominal Output Voltage	Output Current Amps.	Output Voltage N/L-F/L	Ripple Volts RMS	(\$) Price	Model	Case Size
41	.400	45.1 to 36.9	.6	70	U41Y40	Y3
42	5.0	48.0 to 36.0	6.5	115	U42Y500	Y6
44	2.0	48.4 to 39.6	1.5	100	U44Y200	Y5
45	1.0	49.5 to 40.5	1.6	85	45UY100	Y3
45	5.0	51.0 to 38.5	6.5	115	U45Y500	Y6
48	.400	52.8 to 43.2	.6	75	U48Y40	Y3
50	1.0	55 to 45	1.6	85	50UY100	Y3
52	.400	57.2 to 46.8	.6	80	U52Y40	Y3
55	.250	60.5 to 49.5	.4	75	U55Y25	Y3
60	1.0	65.3 to 53.0	2.8	95	U60Y100	Y5
62	.400	69.0 to 58.0	1.5	80	U62Y40	Y3
80	.300	88.0 to 72.0	1.0	80	U80Y30	Y3
90	.400	99.0 to 81.0	2.2	80	U90Y40	Y3
95	.150	105 to 85	1.1	80	U95Y15	Y3
100	.200	110 to 93	1.0	80	U100Y20	Y3
110	.200	121 to 100	1.0	80	U110Y20	Y3
120	.200	132 to 110	1.0	80	U120Y20	Y3
140	.200	154 to 126	1.7	85	U140Y20	Y3
150	.200	165 to 135	1.7	85	U150Y20	Y3
165	.200	176 to 144	1.7	85	U165Y20	Y3
170	.200	187 to 153	2.0	85	U170Y20	Y3
180	.200	190 to 162	2.0	85	U180Y20	Y3
200	.200	220 to 180	2.0	90	U200Y20	Y3
250	.200	275 to 225	4.0	90	250UY20	Y3
275	.100	303 to 247	3.0	85	U275Y10	Y3
275	.200	303 to 247	4.0	95	U275Y20	Y5
300	.200	330 to 270	5.0	95	U300Y20	Y5
325	.200	360 to 295	6.0	95	U325Y20	Y5
340	.100	374 to 306	3.0	85	U340Y10	Y3
360	.100	396 to 324	3.0	85	U360Y10	Y3
370	.100	407 to 333	3.0	85	U370Y10	Y3
400	.200	440 to 360	6.0	100	U400Y20	Y5
420	.100	462 to 378	6.7	85	U420Y10	Y3
475	.020	523 to 426	3.1	85	U475Y02	Y3
500	.200	550 to 450	9.1	105	U500Y20	Y5
550*	.100	605 to 495	4.8	105	U550Y10	Y5
580*	.020	638 to 522	3.1	85	U580Y02	Y3
600*	.100	660 to 540	10.0	110	U600Y10	Y5
750*	.020	825 to 675	3.1	85	U750Y02	Y3
800*	.100	880 to 720	13.0	110	U800Y10	Y5
900*	.020	990 to 810	5.0	90	U900Y02	Y3
900*	.100	990 to 810	13.0	110	U900Y10	Y5
1000*	.100	1100 to 900	13.0	110	U1000Y10	Y5

*Not U.L. recognized when this catalog was published.

WIDE ADJUST OUTPUT

Output Voltage Range	Output Current Amps.	Ripple Volts RMS	(\$) Price	Model	Case Size
0-8*	2.0	2	190	U8YA200	YA
0-15*	1.5	2.5	190	U15YA150	YA
0-54*	1.0	1.6	190	U54YA100	YA
0-95*	.300	2.2	190	U95YA30	YA
0-125*	.200	1.5	190	U125YA20	YA
0-220*	.200	2	190	U220YA20	YA
0-260*	.200	4	190	U260YA20	YA
0-370*	.100	3	190	U370YA10	YA
0-450*	.100	6.7	190	U450YA10	YA
0-800*	.020	3.1	190	U800YA02	YA
0-950*	.020	5	190	U950YA02	YA





Gold Box SWITCHING REGULATED

AC-DC

single output & wide adjust output

- Shipped Within 9 Days
- All Models U.L. Recognized
- Five Year Warranty (fans-1 year)



These ruggedly-built power supplies have tightly regulated outputs and low output ripple. Features include status indicator lights, overvoltage protection, EMI

filtering, 'soft start' operation and provision for external output inhibiting (TTL-compatible).

SPECIFICATIONS

Input Voltage: 90-132 VAC, 49-61 Hz, single phase. For models W24GT50, W28GT42 and W48GT25, the use of a 30A line is recommended and when operating on 50 Hz input, derate output by 5%.

Startup Time: 400 mS maximum (250 mS typical).

Input Undervoltage: An input of less than 90 VAC (180 VAC with "-230" option) will not damage power supply.

Regulation:

Line: $\pm 0.05\%$

Load: $\pm 0.05\%$

Remote Voltage Programming: The output voltage may be controlled by means of an external potentiometer (2500 ohms for single output models; 50,000 ohms for wide adjust output models).

Polarity: Output is floating and may be used in either polarity.

Drift: $\pm 0.1\%$ maximum over 8 hours, after 30 minute warmup.

Temperature Coefficient: $\pm 0.02\%/^{\circ}\text{C}$ (Typical).

Holdup Time: 33 mS minimum (At nominal input voltage, with full load).

Transient Response: 300 μS to return to $\pm 1\%$ of output setting. Maximum of $\pm 3\%$ output excursion following a load step change from 50% to 100%.

Remote Sensing: Compensates up to 0.5 volt drop per output line, within the limits of the output voltage adjustment range.

Overload/Short Circuit Protection: Foldback current limiting with automatic recovery.

Overvoltage Protection: Latches power supply OFF, reset by momentarily removing AC input power. Red indicator lights to indicate latchup.

Output Inhibit: Applying between +2 and +30 Vdc to the inhibit terminal will disable the supply (TTL compatible).

Thermal Protection: Thermostat, self-resetting.

Efficiency: See table. (Typical, at nominal input voltage, with full load.)

Ambient Operating Temperature: 0 to $+71^{\circ}\text{C}$.

Storage Temperature: -40 to $+85^{\circ}\text{C}$.

Cooling: Forced-air cooled (ball bearing fan); air enters back of power supply and exits from front.

Switching Frequency: 55 kHz (Typical).

Isolation:

Input to output: 1400 Vdc

Input to case: 1400 Vdc

Output to case: 400 Vdc

Mounting: Threaded mounting holes permit mounting to a chassis, cabinet wall or bracket, or they may be used on a test bench or tabletop. To mount on the power supply side of the mounting surface or for DIN rail mounting, see accessory Mounting Kits on page 37.

OPTIONS

230 Volt Input: For applications where operation on an input of 180-264 VAC, 49-61 Hz, is desired. To order, add suffix "-230" to the model number and \$40.00 to the standard price. The "-230" option requires two additional days.





SWITCHING REGULATED (continued)

Gold Box

ACCESSORY MOUNTING KITS *For use with Gold Box, Narrow Profile, and modular High Voltage power supplies.*

FOR WALL MOUNTING



These kits provide a way of mounting power supplies on a wall or panel when the other side of the mounting surface is inaccessible. Each kit consists of four aluminum brackets and four machine screws for fastening them to the power supply, effectively adding mounting flanges to the power supply.

For Gold Box and modular High Voltage power supplies:

Model GB8 (#8-32 mounting holes) \$8

For Narrow Profile power supplies:

Case Sizes F6T, F8T, N8T, TN6T


Model NP6 (#6-32 mounting holes) \$8

Case Sizes N8H, TN8H

Model NP6L (#6-32 mounting holes) \$8

Model NP6L consists of two brackets 1.5" long as shown above, and two 2.5" long brackets (to extend beyond heat sink).

FOR DIN RAIL MOUNTING

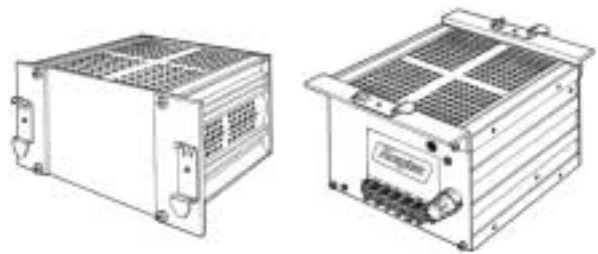

Five different models of DIN rail Mounting Kits are available. Contact factory or see website for detailed information.

DIN rail Mounting Kit \$15

SINGLE OUTPUT MODELS

Nominal Output Voltage	Adjust Range ±V	Output Current Amps. at		Ripple mV (@ 25 MHz BW)		Effic. (Typ.) %	(\$ Price)	Model	Case Size
		40°C	71°C	RMS	P-P				
3.3	.25	65	45	10	50	65	595	W3.3MT65	WM6
3.3	.25	100	70	10	50	65	795	W3.3MT100	WM9
3.3	.25	150	105	10	50	65	995	W3.3GT150	WG7
5	.25	65	45	10	50	70	595	W5MT65	WM6
5	.25	100	70	10	50	70	795	W5MT100	WM9
5	.25	150	105	10	50	70	995	W5GT150	WG7
6	.25	56	39	10	50	71	595	W6MT56	WM6
6	.25	86	60	10	50	71	795	W6MT86	WM9
8	.25	41	28	15	100	73	595	W8MT41	WM6
8	.25	63	44	15	100	73	795	W8MT63	WM9
9	.25	37	26	15	100	73	595	W9MT37	WM6
9	.25	57	40	15	100	73	795	W9MT57	WM9
10	.5	34	24	15	100	74	595	W10MT34	WM6
10	.5	52	36	15	100	74	795	W10MT52	WM9
12	.5	29	20	15	100	76	595	W12MT29	WM6
12	.5	45	32	15	100	76	795	W12MT45	WM9
12	.5	68	47	15	100	76	995	W12GT68	WG7
15	.5	23	16	15	100	76	595	W15MT23	WM6
15	.5	36	25	15	100	76	795	W15MT36	WM9
15	.5	54	38	15	100	76	995	W15GT54	WG7
18	.5	20	14	15	100	78	595	W18MT20	WM6
18	.5	31	22	15	100	78	795	W18MT31	WM9
20	1	19	13	15	100	79	595	W20MT19	WM6
20	1	28	19	15	100	79	795	W20MT28	WM9
24	1	16	11	15	100	81	595	W24MT16	WM6
24	1	25	18	15	100	81	795	W24MT25	WM9
24	1	38	26	15	100	81	995	W24GT38	WG7
24	1	50	35	15	100	81	1095	W24GT50	WG7
28	1	14	10	15	100	81	595	W28MT14	WM6
28	1	21	15	15	100	81	795	W28MT21	WM9
28	1	32	22	15	100	81	995	W28GT32	WG7
28	1	42	29	15	100	81	1095	W28GT42	WG7
30	1	13	9	25	150	81	595	W30MT13	WM6
30	1	19	13	25	150	81	795	W30MT19	WM9
36	1	10	7	25	150	81	595	W36MT10	WM6
36	1	15	11	25	150	81	795	W36MT15	WM9
40	1	9	6	25	150	82	595	W40MT9	WM6
40	1	14	10	25	150	82	795	W40MT14	WM9
48	1	8	5	25	150	82	595	W48MT8	WM6
48	1	12	8.5	25	150	82	795	W48MT12	WM9
48	1	19	13	25	150	82	995	W48GT19	WG7
48	1	25	17	25	150	82	1095	W48GT25	WG7

WIDE ADJUST OUTPUT MODELS

Output Voltage Range	Output Current Amps. at		Ripple mV (@ 25 MHz BW)		Effic. (Typ.) %*	(\$ Price)	Model	Case Size
	40°C	71°C	RMS	P-P				
5-15	23	16	15	100	76	650	W515MT23	WM6
5-15	36	25	15	100	76	850	W515MT36	WM9
5-15	54	38	15	100	76	1050	W515GT54	WG7
5-30	13	9	25	150	81	650	W530MT13	WM6
5-30	19	13	25	150	81	850	W530MT19	WM9
5-30	30	20	25	150	81	1050	W530GT30	WG7
15-50	8	5	25	150	82	650	W1550MT8	WM6
15-50	12	8.5	25	150	82	850	W1550MT12	WM9
15-50	18	12	25	150	82	1050	W1550GT18	WG7

* At maximum output voltage

See page 38 for drawings of case sizes WM6, WM9 and WG7.



It's easy to find what you need at www.acopian.com or www.find a power supply.com
 P.O. Box 638, Easton, PA 18044 • Phone: (610) 258-5441 • FAX: (610) 258-2842


SWITCHING REGULATED (continued)

Gold Box


SWITCHING REGULATED **Gold Box** drawings:




Case Sizes WM6 & WM9

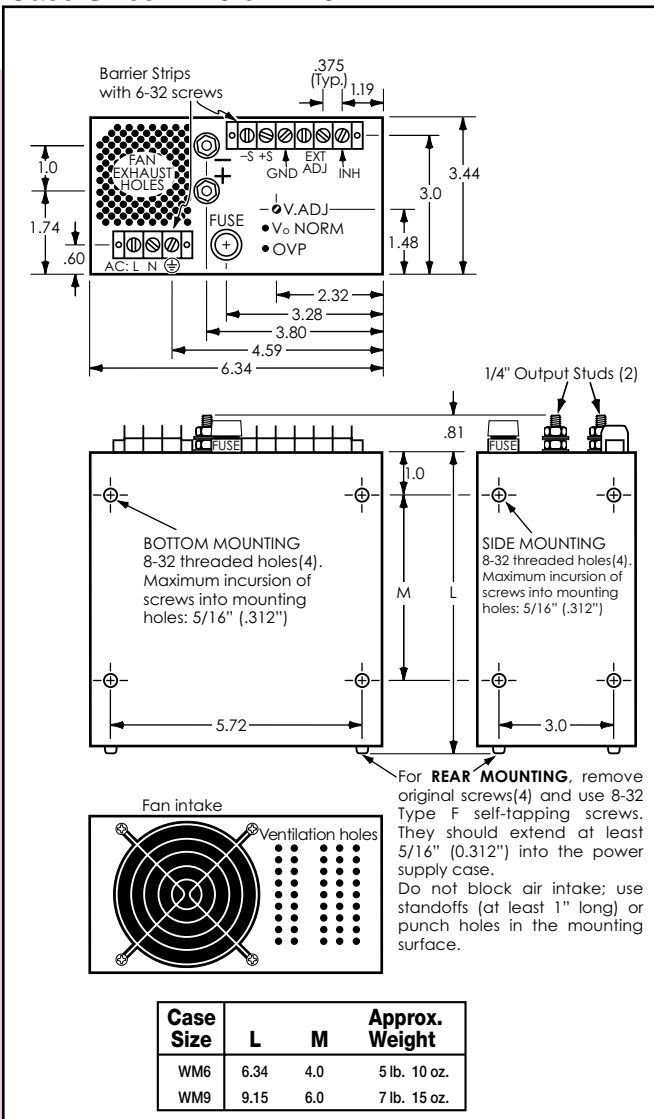

Case Size WG7

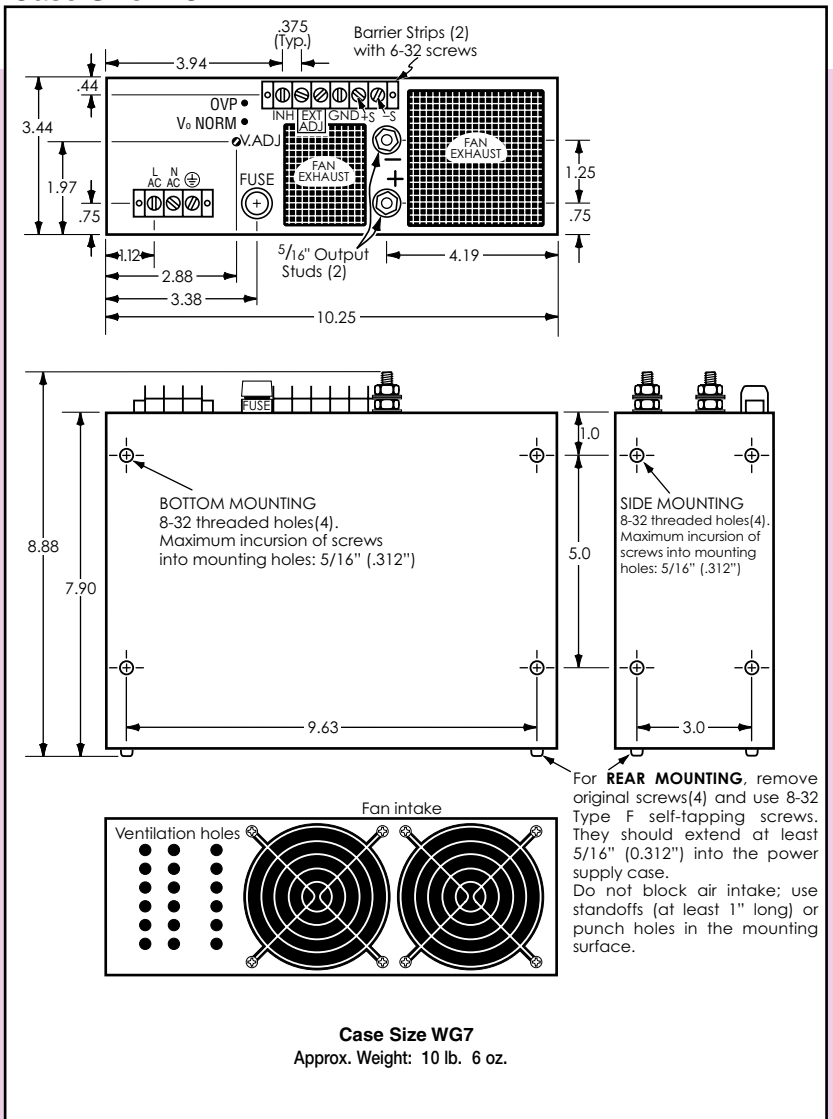

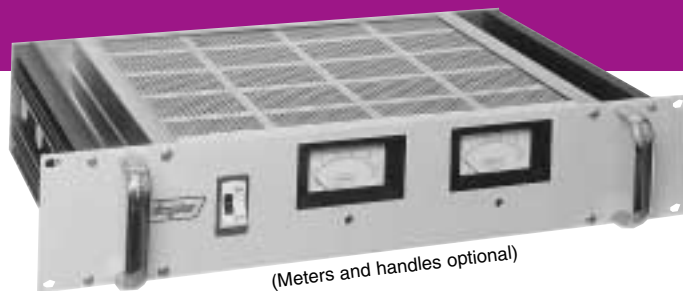

(Meters and handles optional)

wide adjust output

Rack Mounting

LINEAR REGULATED

AC-DC

(fixed & adjustable current limiting)

- Shipped Within 9 Days
- U.L. Recognized
- Five Year Warranty

Similar to the rack mounting power supplies listed on pages 40 and 41, but with broadened output voltage ranges. All models may be programmed through their voltage ranges by means of external resistance. Models with adjustable current limiting have a constant-voltage/constant-current crossover characteristic, and so may be used as constant current sources.

Output Voltage Range	Output Current Amps. at			Voltage Prgmg. Coeff. (Ω/V)	Case Size	Voltage Programmable Fixed Current Limiting		Voltage Programmable Adjust. Current Limiting	
	40°C	55°C	71°C			Model	Price (\$)	Model	Price (\$)
0-6	10.0	8.0	6.0	820	3P11	A06PX10	520	P06PX10	560
0-6	16.0	12.8	9.6	820	5P12	A06PX16	640	P06PX16	680
0-6*	23.0	18.4	13.8	820	3P17	A06PX23	795	P06PX23	835
0-6*	30.0	24.0	18.0	820	5P17	A06PX30	930	P06PX30	970
0-15	7.0	5.6	4.2	330	3P11	A015PX7	520	P015PX7	560
0-15	10.0	8.0	6.0	330	5P12	A015PX10	640	P015PX10	680
0-15*	13.0	10.4	7.8	330	3P17	A015PX13	795	P015PX13	835
0-30	4.0	3.2	2.4	160	3P11	A030PX4	520	P030PX4	560
0-30	5.0	4.0	3.0	160	5P12	A030PX5	640	P030PX5	680
0-30*	7.0	5.6	4.2	160	3P17	A030PX7	795	P030PX7	835
0-30*	9.0	7.2	5.4	160	5P17	A030PX9	930	P030PX9	970
0-50	2.4	1.9	1.5	1000	3P11	A050PX2	520	P050PX2	560
0-50	3.0	2.4	1.8	1000	5P12	A050PX3	640	P050PX3	680
0-50*	5.0	4.0	3.0	1000	5P17	A050PX5	930	P050PX5	970
0-100*	1.2	.9	.7	500	3P11	A0100PX1.2	575	P0100PX1.2	615
0-100*	1.5	1.2	.9	500	5P12	A0100PX1.5	745	P0100PX1.5	785

*Not U.L. recognized when this catalog was published.

SPECIFICATIONS

Input Voltage: 105-125 VAC, 50-400 Hz, single phase.

Regulation, Ripple (in constant voltage mode):

Line Regulation: $\pm 0.005\%$ or 2 mV, whichever is greater.
Load Regulation: $\pm 0.005\%$ or 2 mV, whichever is greater.
Ripple: 0.25 mV rms.

Regulation, Ripple (in constant current mode):

Line Regulation: $\pm 0.1\%$ or 2 mA.
Load Regulation: $\pm 0.2\%$ or 5 mA.
Ripple: 0.1% rms.

Remote Voltage Sensing: Provision for sensing the output voltage across the load, to compensate voltage drops in output wiring, is a standard feature.

Remote Voltage Programming: The output voltage may be controlled by means of external resistance connected in series with the - S lead.

Voltage Programming Coefficient: See table.
Calibration tolerance, $\pm 2\%$.

Current Limiting/Programming: Models with fixed current limiting have a rolloff characteristic with automatic recovery. All others have current limiting with a constant-voltage/constant-current crossover characteristic.

Polarity: Output is floating; either positive or negative terminal may be grounded or floated up to 300 volts above ground.

Controls: Coarse and fine voltage adjustments, and the current limit adjustment, are located at the rear of the assembly.

Temperature Coefficient (in constant voltage mode): 0.02%/°C (Typical).

Ambient Operating Temperature: -20 to +71°C.

Storage Temperature: -55 to +85°C.

Dimensions and Connections: See page 40.

OPTIONS

Overvoltage Protection: An internally mounted overvoltage protection circuit, set approximately 20% above the maximum output voltage rating of the supply, is available on all models. To order, add prefix "V" to the model number, and increase standard price as follows:

Maximum output of	6-50V	100V
All case sizes except 5P17 \$35.00	\$45.00
Case size 5P17 \$85.00	

Remote Current Limiting Adjustment: All models having numbers beginning with the letter P have a built in current limit control. Provision for control of the current limit setting by adjustment of an external resistance is available as an option. To order, add the prefix letter "E" to the model number, and add \$25.00 to the standard price.

The current limit setting is inversely related to resistance. Use a 200 ohm, 1/2 W potentiometer.

Ammeter: Add suffix "A" to model number and \$45.00 to price.

Voltmeter: Add suffix "F" to model number and \$45.00 to price.

Handles: Add suffix "H" to model number and \$30.00 to price.

Terminal Strip Cover: Clips on. To order, add suffix "M" to model number and \$5.00 to price.

Front Panel Controls: For voltage controls (coarse and fine) mounted on the front panel, instead of the standard screwdriver-slot adjustments at the rear, add suffix "P" to the model number and \$25.00 to price. For a current limit control mounted on the front panel, add suffix "Y" to the model number and \$15.00 to price.

230 Volt Input: For operation on inputs of 210 to 250 VAC, 50-400 Hz. Add suffix "-230" to model number and \$40.00 to price. The "-230" option requires two additional days.





single & dual tracking outputs

Rack Mounting

LINEAR REGULATED
AC-DC



- Shipped Within 9 Days
- All Models U.L. Recognized
- Five Year Warranty

Acopian rack-mounting power supplies feature excellent regulation and ripple specifications in 101 models with outputs up to 150 volts and 60 amps. Metering and overvoltage protection are available as

options. These power supplies are constructed in sturdy extruded aluminum assemblies designed expressly for mounting in standard 19" wide RETMA cabinet racks. The front panels are finished in light gray enamel.

SPECIFICATIONS

Input Voltage: 105-125 VAC, 50-400 Hz, single phase.

Remote Voltage Sensing: Provision for sensing the output voltage across the load is a standard feature.

Polarity:

Single Output Models: Output is floating; either positive or negative terminal may be grounded or floated up to 300 volts above ground.

Dual Output Models: Positive output, common, negative output.

Temperature Coefficient:

Single Output Models: 0.015%/°C (Typical).

Dual Output Models: 0.02%/°C (Typical).

Ambient Operating Temperature:

Single Output Models: -20 to +55°C.

Dual Output Models: -10 to +55°C.

Storage Temperature:

Single Output Models: -55 to +85°C.

Overload/Short Circuit Protection: Foldback current limiting with automatic recovery.

CONNECTIONS (Single Output models):

Case sizes



3P11 and 5P12:



3P11 Barrier Strip with 6-32 terminal screws
5P12 Barrier Strip with 8-32 terminal screws


Case sizes

3P17 and 5P17:

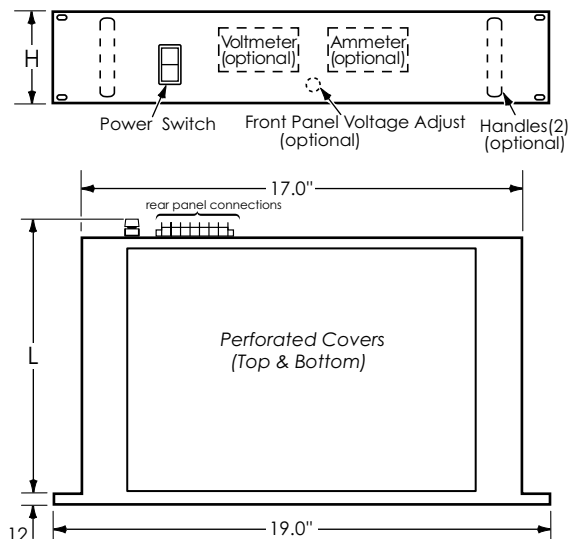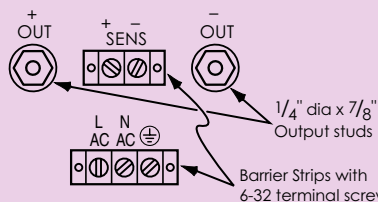

Case Size	H	L	Approx. Weight
3P11	3 1/2"	10 7/8"	22 lb.
3P17	3 1/2"	16 13/16"	38 lb.
5P12	5 1/4"	11 15/16"	28 lb.
5P17	5 1/4"	16 13/16"	53 lb.

CONNECTIONS (Dual Output models):



Barrier Strip with 6-32 terminal screws



It's easy to find what you need at www.acopian.com or www.find a power supply.com
P.O. Box 638, Easton, PA 18044 • Phone: (610) 258-5441 • FAX: (610) 258-2842

Rack Mounting (continued)

single & dual tracking outputs

LINEAR REGULATED

SINGLE OUTPUT

Nominal Output Voltage	Adjust Range ± V	Output Current Amps. at		Regulation		Ripple mV RMS	(\$) Price	Model	Case Size
		40°C	55°C	Load* ±%	Line* ±%				
1.5	.5	20	20	.005	.005	.25	520	1.5PT20	3P11
1.5	.5	32	27	.005	.005	.25	635	1.5PH32	5P12
1.5	.25	60	47	.05	.05	1	930	1.5PH60	5P17
2	.5	20	20	.005	.005	.25	520	2PT20	3P11
2	.5	30	25	.005	.005	.25	630	2PH30	5P12
3	.5	20	20	.005	.005	.25	520	3PT20	3P11
3	.5	30	25	.005	.005	.25	635	3PH30	5P12
3	.25	60	47	.05	.05	1	930	3PH60	5P17
3.3	.5	20	20	.005	.005	.25	520	3.3PT20	3P11
3.3	.5	32	27	.005	.005	.25	635	3.3PH32	5P12
3.3	.25	60	47	.05	.05	1	930	3.3PH60	5P17
5	.5	20	20	.005	.005	.25	520	5PT20	3P11
5	.5	32	27	.005	.005	.25	635	5PH32	5P12
5	.25	48	37	.05	.05	1	795	5PT48	3P17
5	.25	60	47	.05	.05	1	930	5PH60	5P17
6	.5	20	20	.005	.005	.25	520	6PT20	3P11
6	.5	28	23	.005	.005	.25	635	6PH28	5P12
6	.25	47	36	.05	.05	1	795	6PT47	3P17
6	.25	58	45	.05	.05	1	930	6PH58	5P17
7	.5	20	20	.005	.005	.25	520	7PT20	3P11
8	.5	20	20	.005	.005	.25	520	8PT20	3P11
8	.5	28	23	.005	.005	.25	635	8PH28	5P12
8	.25	54	42	.05	.05	1	930	8PH54	5P17
9	.5	20	20	.005	.005	.25	520	9PT20	3P11
9	.5	41	32	.05	.05	1	795	9PT41	3P17
9	.5	52	41	.05	.05	1	930	9PH52	5P17
10	.5	20	20	.005	.005	.25	520	10PT20	3P11
10	.5	25	20	.005	.005	.25	635	10PH25	5P12
10	.5	50	39	.05	.05	1	930	10PH50	5P17
12	.5	17	17	.005	.005	.25	520	12PT17	3P11
12	.5	22	22	.005	.005	.25	635	12PH22	5P12
12	.5	33	26	.05	.05	1	795	12PT33	3P17
12	.5	45	35	.05	.05	1	930	12PH45	5P17
13	.5	16	16	.005	.005	.25	520	13PT16	3P11
13	.5	43	34	.05	.05	1	930	13PH43	5P17
14	.5	12	12	.005	.005	.25	520	14PT12	3P11
15	.5	10	10	.005	.005	.25	520	15PT10	3P11
15	.5	19	16	.005	.005	.25	635	15PH19	5P12
15	.5	25	20	.05	.05	1	795	15PT25	3P17
15	.5	40	31	.05	.05	1	930	15PH40	5P17
16	.5	10	10	.005	.005	.25	520	16PT10	3P11
18	.5	10	10	.005	.005	.25	520	18PT10	3P11
18	.5	18	15	.005	.005	.25	635	18PH18	5P12
18	.5	24	19	.05	.05	1	795	18PT24	3P17
18	.5	36	28	.05	.05	1	930	18PH36	5P17
20	.5	10	10	.005	.005	.25	520	20PT10	3P11
20	.5	16	14	.005	.005	.25	635	20PH16	5P12
20	.5	23	18	.05	.05	1	795	20PT23	3P17
20	.5	32	25	.05	.05	1	930	20PH32	5P17
22	.5	10	10	.005	.005	.25	520	22PT10	3P11

*or 2 mv, whichever is greater.

DUAL TRACKING OUTPUTS

Nominal Output Voltages	Adjust Range ± V	Amps. per Output at		Regulation		Ripple mV RMS	(\$) Price	Model	Case Size
		40°C	55°C	Load ±%	Line ±%				
±12	.5	7	5.6	.1	.1	1.5	530	PD12-700	3P11
±12	.5	9	7.2	.1	.1	1.5	645	PD12-900	5P12
±15	.5	7	5.6	.1	.1	1.5	530	PD15-700	3P11
±15	.5	9	7.2	.1	.1	1.5	645	PD15-900	5P12

OPTIONS

EXAMPLE: The Model 5PT20 equipped with all options is designated as the Model V5PT20AFHMP-230. (List suffix letters in alphabetical sequence.)

Overvoltage Protection: An internally installed and preset overvoltage protector is available. On dual output models, if either output fails, both outputs are 'crowbarred'. To order, add prefix "V" to the model number and increase price as follows:

Outputs of	1.5-70V	75-150V
Case size 3P11\$35.00	\$45.00
Other case sizes\$85.00	\$95.00

Nominal Output Voltage	Adjust Range ± V	Output Current Amps. at		Regulation		Ripple mV RMS	(\$) Price	Model	Case Size
		40°C	55°C	Load ±%	Line ±%				
24	.5	10	10	.005	.005	.25	520	24PT10	3P11
24	.5	15	13	.005	.005	.25	635	24PH15	5P12
24	.5	20	16	.05	.05	1	795	24PT20	3P17
24	.5	30	23	.05	.05	1	930	24PH30	5P17
25	.5	10	10	.005	.005	.25	520	25PT10	3P11
26	.5	10	10	.005	.005	.25	520	26PT10	3P11
28	.5	10	10	.005	.005	.25	520	28PT10	3P11
28	.5	14	12	.005	.005	.25	635	28PH14	5P12
28	.5	19	15	.05	.05	1	795	28PT19	3P17
28	.5	28	22	.05	.05	1	930	28PH28	5P17
30	.5	10	10	.005	.005	.25	520	30PT10	3P11
30	.5	14	12	.005	.005	.25	635	30PH14	5P12
32	.5	5	5	.005	.005	.25	450	32PT5	3P11
32	.5	10	10	.005	.005	.25	595	32PT10	5P12
34	.5	5	5	.005	.005	.25	460	34PT5	3P11
34	.5	10	10	.005	.005	.25	600	34PT10	5P12
35	.5	5	5	.005	.005	.25	470	35PT5	3P11
35	.5	10	10	.005	.005	.25	615	35PT10	5P12
36	.5	5	5	.005	.005	.25	475	36PT5	3P11
36	.5	10	10	.005	.005	.25	625	36PT10	5P12
38	.5	5	5	.005	.005	.25	485	38PT5	3P11
38	.5	10	10	.005	.005	.25	630	38PT10	5P12
40	.5	5	5	.005	.005	.25	485	40PT5	3P11
40	.5	10	10	.005	.005	.25	645	40PT10	5P12
45	.5	5	5	.005	.005	.25	495	45PT5	3P11
45	.5	10	10	.005	.005	.25	660	45PT10	5P12
48	.5	5	5	.005	.005	.25	495	48PT5	3P11
48	.5	10	10	.005	.005	.25	660	48PT10	5P12
48	.5	15	12	.005	.005	.25	820	48PT15	5P17
50	.5	5	5	.005	.005	.25	495	50PT5	3P11
50	.5	10	10	.005	.005	.25	660	50PT10	5P12
55	.5	5	3.8	.005	.005	.25	505	55PT5	3P11
55	.5	8	6	.005	.005	.25	675	55PT8	5P12
60	.5	5	3.8	.005	.005	.25	510	60PT5	3P11
60	.5	8	6	.005	.005	.25	690	60PT8	5P12
75	1	4	3	.01	.01	1	520	75PT4	3P11
75	1	5.6	4.2	.01	.01	1	715	75PT5.6	5P12
90	1	3.3	2.5	.01	.01	1	530	90PT3.3	3P11
90	1	4.4	3.3	.01	.01	1	725	90PT4.4	5P12
100	1	3	2.2	.01	.01	1	540	100PT3	3P11
100	1	4	3	.01	.01	1	735	100PT4	5P12
120	1	2.5	1.8	.01	.01	1	550	120PT2.5	3P11
120	1	3.5	2.6	.01	.01	1	745	120PT3.5	5P12
125	1	2.5	1.8	.01	.01	1	560	125PT2.5	3P11
125	1	3.5	2.6	.01	.01	1	755	125PT3.5	5P12
150	1	2.3	1.7	.01	.01	1	560	150PT2.3	3P11
150	1	3	2.2	.01	.01	1	755	150PT3	5P12

Metering (Single Output Models):

Ammeter: Add suffix "A" to model number and \$45.00 to price.

Voltmeter: Add suffix "F" to model number and \$45.00 to price.

Metering (Dual Output Models):

Ammeters: One for each output. Add suffix "A" to model number and \$90.00 to price. "A" and "F" options cannot be combined in one power supply.

Voltmeters: One for each output. Add suffix "F" to model number and \$90.00 to price. "A" and "F" options cannot be combined in one power supply.

Voltmeter and Ammeter: Each with switch for selecting output to be monitored. Add suffix "G" to model number and \$140.00 to price.

Handles: Add suffix "H" to model number and \$30.00 to price.

Terminal Strip Cover: Clips on. To order, add suffix "M" to model number and \$5.00 to price.

Front Panel Voltage Adjustment: Standard models have a voltage adjustment located at the rear. A voltage control mounted on the front panel is available as an option. To order, add suffix "P" to the model number and \$15.00 to price.

230 Volt Input: For operation on inputs of 210 to 250 VAC, 50-400 Hz. Add suffix "-230" to model number and \$40.00 to price. The "-230" option requires two additional days.



It's easy to find what you need at www.acopian.com or www.find_a_power_supply.com
P.O. Box 638, Easton, PA 18044 • Phone: (610) 258-5441 • FAX: (610) 258-2842




REDUNDANT POWER PACKAGES and MODULAR REDUNDANT SYSTEMS *(Rack Mounting & Wall Mounting) (Three separate modules)*

PAGES 44-45: Redundant Power Packages (LINEAR)
PAGES 46-47: Redundant Power Packages (SWITCHING)
PAGES 48-49: Modular Redundant Systems (LINEAR)

AC-DC
single output

- Shipped Within 9 Days
- U.L. Recognized (Redundant Power Packages)
- Five Year Warranty

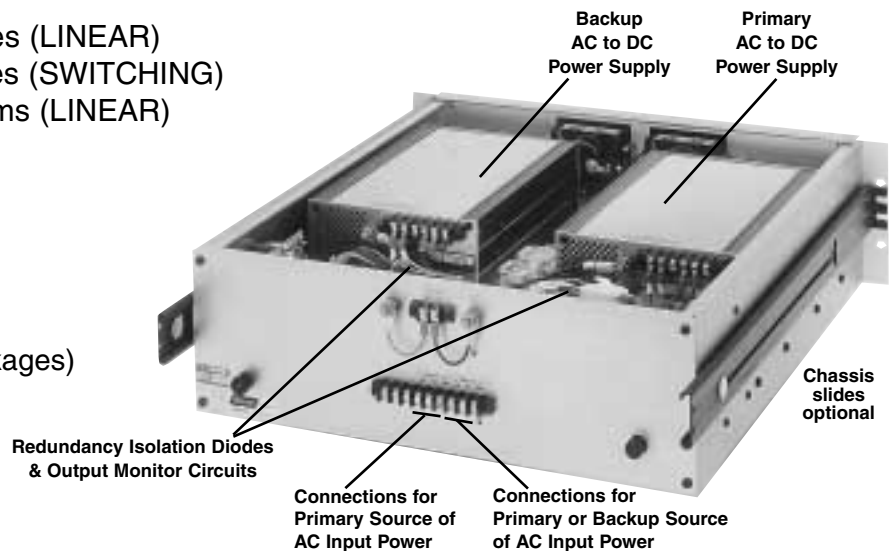

Applications: Redundant Power should be considered for any equipment where the highest attainable reliability is essential, and an unexpected loss of power would be disastrous. Such applications include communications systems (both voice and data types), computer systems (volatile memory systems in particular), process controls, utility and municipal systems, and security/safety alarm systems.

Output Redundancy: Each Redundant Power Package or Modular Redundant System contains two identical power supplies with their outputs interconnected through a diode switching arrangement that will detect any fault condition, isolate it from the system output, and pass only the output of the other supply with no interruption of output power during the transition.

Input Redundancy: All Acopian Redundant Power Packages or Modular Redundant Systems may be operated with only one AC power source. However, two isolated sets of AC input connections are provided, so that two independent sources of input power may be used, to obtain the additional protection of input redundancy. A battery-backup power source (UPS) and/or a second power line from the power utility can be used to maintain output power without interruption when your primary source of AC power fails.

Serviceability: A defective power supply can be rapidly and safely changed while the other supply continues to furnish uninterrupted power to the load. All input, output and alarm-contact connections are at the rear of the assembly for Rack Mounting models or on the front for Wall Mounting models or Modular Systems. For Rack Mounting models, the chassis slides and handles options are recommended for applications where it is desired to service the Redundant Power Package without removing it from the rack.

Operation: The output voltage of the primary supply is set approximately 0.2 volt higher than that of the backup supply. Under this condition, the backup supply's diode is not forward biased; only the primary supply delivers current to the load. If the output voltage of the primary supply decreases by more than 0.2 volt, the situation is reversed and only the backup supply delivers load current. There is no interruption of output power during the transition.

Monitoring Circuitry: Acopian Redundants contain two voltage monitoring circuits with relays, the contacts of which are available to control external failure alarms or other circuitry. The contact wiring of the two relays is connected in cascade, to simulate a single set of Form C contacts which switches if the output voltage of either power supply decreases by more than 2.0 volts (3.0 volts for outputs over 48 volts) from the nominal rating.

Overvoltage Protection: Each power supply contains an overvoltage protection circuit, to assure that neither power supply output will significantly exceed the nominal output voltage rating under any condition, including incorrect application and misadjustment.




(continued)

REDUNDANT POWER PACKAGES and MODULAR REDUNDANT SYSTEMS (Rack Mounting & Wall Mounting) (Three separate modules)

Simplified Diagram for Redundant Power Packages

(see page 49 for Simplified Diagram of the Modular Redundant Systems)

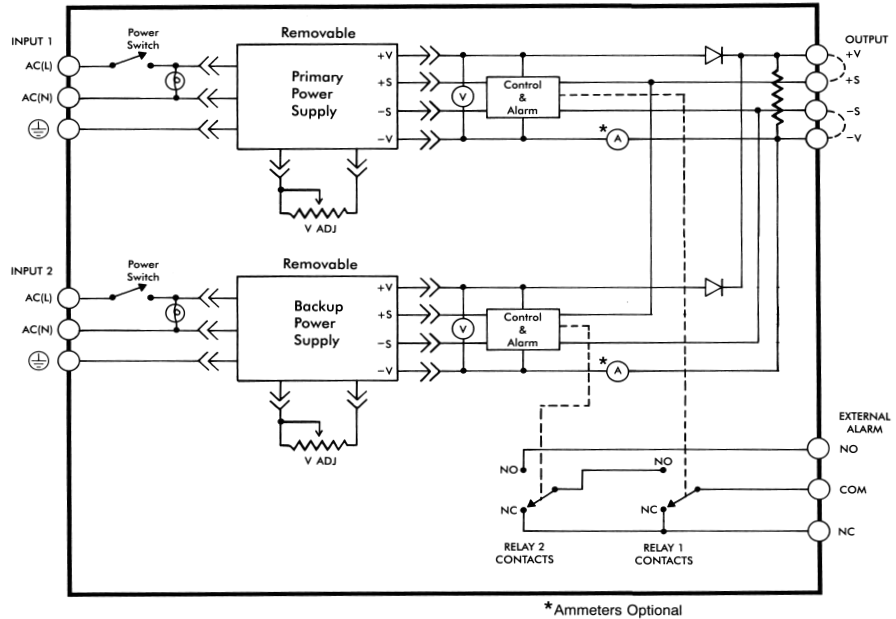

SPECIFICATIONS (for Redundant Power Packages & Modular Redundant Systems)

Input Voltage: (A separate set of AC input terminals is provided for each power supply, so that if two sources of AC input power are available, one may be used for each supply and so reduce the possibility of output dropout due to loss of input power.)

Linear: 105-125 VAC, 50-400 Hz, single phase.

Switching: 90-132 VAC, 49-61 Hz, single phase.

For models R24W7, RWL24W7, R28W7, RWL28W7, R48W7 and RWL48W7, the use of 30A lines is recommended.

When operating on 50 Hz input, derate output by 5%.

Remote Voltage Sensing: Provision for sensing the output voltage across the load, so that drops in the load line are compensated, is a standard feature.

Output Voltage:

Normal mode: Nominal voltage shown in table.

Backup mode: 0.2 volt less than nominal voltage shown in table.

Output Regulation:

Line: $\pm 0.05\%$

Load: $\pm 0.05\%$ (Dynamic regulation - does not include 0.2 volt shift which occurs during switchover to lower-set backup supply.)

Load Protection: Overvoltage protection.

Overload/Short Circuit Protection: Foldback current limiting with automatic recovery.

Polarity: Output is floating; either positive or negative output terminal may be grounded or floated up to 300 volts above ground.

Output Monitoring:

Redundant Power Packages: A separate voltmeter for each output (standard). Ammeters available; see Options.

Modular Redundant Systems: 'Output Present' LED for each power supply is located on the Integration Module.

Temperature Coefficient: 0.02%/°C (Typical).

Ambient Operating Temperature:

Linear: -20 to +71°C.

Switching: 0 to +71°C.

Storage Temperature:

Linear: -55 to +85°C.

Switching: -40 to +85°C.



It's easy to find what you need at www.acopian.com or www.find_a_power_supply.com
P.O. Box 638, Easton, PA 18044 • Phone: (610) 258-5441 • FAX: (610) 258-2842




LINEAR REGULATED REDUNDANT POWER PACKAGES Rack Mounting & Wall Mounting

Rack Mounting

AC-DC
single output

- Shipped Within 9 Days
- All Models U.L. Recognized
- Five Year Warranty

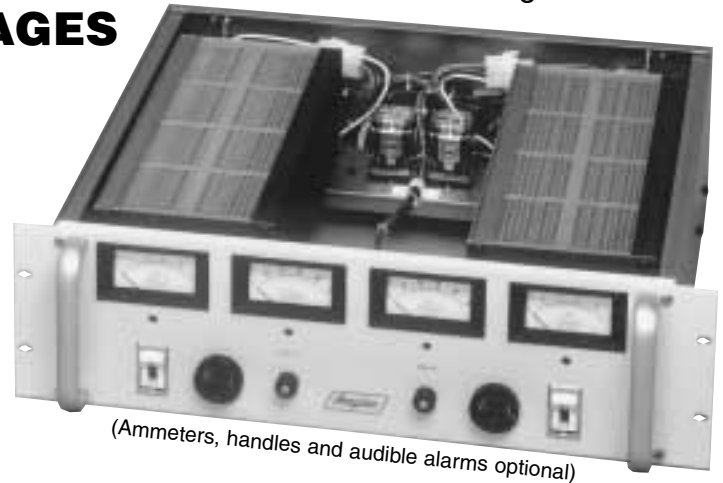

(Ammeters, handles and audible alarms optional)

An Acopian Redundant Power Package is installed by simply connecting the AC input and DC output terminals. All wiring (including isolation diodes, output monitor circuits, switches, meters, adjustments and connectors) has been done for you.

For Specifications and other information, see pages 42 & 43.

OPTIONS

Add option suffixes in alphabetical order. Example: R5H16AH-230.

Ammeters: One for each output. For models in case sizes 3R14 and 317R18 two volt/ammeters, each with switch, are substituted for the standard voltmeters. Add suffix "A" to model number and \$90.00 to price.

Audible Alarms: Piercing whistle alerts personnel to a voltage lower than normal. Front panel mounted, one for each power supply. Units with this option do not have provision for control of an external alarm. To order, add suffix "K" to model number and \$90.00 to price.

Handles (for Rack Mounting models): Add suffix "H" to model number and \$30.00 to price.

Terminal Strip Cover: Clips on.

Wall Mounting models: Standard.

Rack Mounting models: To order, add suffix "M" to model number and \$10.00 to price.

Chassis Slides (for Rack Mounting models): For racks having rear mounting rails spaced 20" to 26" behind the front panel. To order, add suffix "S" to model number and \$90.00 to price.

230 Volt Input: For operation on inputs of 210-250 VAC, 50-400 Hz. To order, add suffix "-230" to model number and \$75.00 to price. Requires two additional days.

Linear Regulated REDUNDANT POWER PACKAGES

Nominal Output Voltage	Adjust Range ±V	Output Current Amps. at			Ripple mV RMS	Rack Mounting Models			Wall Mounting Models		
		40°C	55°C	71°C		(\$) Price	Model	Case Size	(\$) Price	Model	Case Size
5	.5	2.6	2.5	2.4	1	1095	R5N8X	3R14	1395	RWL5N8X	317R18
5	.5	5.3	4.4	3.5	1	1195	R5M6	5R14	1495	RWL5M6	517R18
5	.5	11	9.3	7.5	1	1295	R5M13	5R18	1595	RWL5M13X	517R20
5	.5	21	17	14	1	1495	R5H11	7R18	1795	RWL5H11	719R20
5	.5	28	23	19	1	1695	R5H16	7R20	1995	RWL5H16	719R25
12	.5	1.5	1.5	1.5	1	1095	R12N8X	3R14	1395	RWL12N8X	317R18
12	.5	3.5	3	2.5	1	1195	R12M6	5R14	1495	RWL12M6	517R18
12	.5	8	7.5	7	1	1295	R12M13	5R18	1595	RWL12M13X	517R20
12	.5	16	13.8	11.2	1	1495	R12H11	7R18	1795	RWL12H11	719R20
12	.5	20	17	14.2	1	1695	R12H16	7R20	1995	RWL12H16	719R25
15	.5	1.5	1.5	1.5	1	1095	R15N8X	3R14	1395	RWL15N8X	317R18
15	.5	4	3.8	3.6	1	1195	R15M9	5R14	1495	RWL15M9	517R18
15	.5	6.5	6	5.5	1	1295	R15M13	5R18	1595	RWL15M13X	517R20
15	.5	14.7	12.5	10.3	1	1495	R15H11	7R18	1795	RWL15H11	719R20
15	.5	18.7	16	13.3	1	1695	R15H16	7R20	1995	RWL15H16	719R25
24	.5	.9	.9	.9	1	1095	R24N8X	3R14	1395	RWL24N8X	317R18
24	.5	3	2.7	2.4	1	1195	R24M9	5R14	1495	RWL24M9	517R18
24	.5	5	5	5	1	1295	R24M13	5R18	1595	RWL24M13X	517R20
24	.5	11.7	10.2	8.7	1	1495	R24H11	7R18	1795	RWL24H11	719R20
24	.5	14.7	12.7	10.7	1	1695	R24H16	7R20	1995	RWL24H16	719R25
28	.5	1	1	1	1	1095	R28N8X	3R14	1395	RWL28N8X	317R18
28	.5	2.7	2.6	2.5	1	1195	R28M9	5R14	1495	RWL28M9	517R18
28	.5	5	5	5	1	1295	R28M13	5R18	1595	RWL28M13X	517R20
28	.5	10.5	9.2	8	1	1495	R28H11	7R18	1795	RWL28H11	719R20
28	.5	14	12	10	1	1695	R28H16	7R20	1995	RWL28H16	719R25
48	.5	.4	.4	.4	1	1130	R48N8T	3R14	1430	RWL48N8T	317R18
48	.5	1.6	1.4	1.2	1	1240	R48M9	5R14	1540	RWL48M9	517R18
48	.5	3	3	3	1	1340	R48M13	5R18	1640	RWL48M13X	517R20
48	.5	6	5	4	1	1545	R48H11	7R18	1845	RWL48H11	719R20
48	.5	8.5	7.2	5.5	1	1835	R48H16	7R20	2135	RWL48H16	719R25
60	1	.25	.25	.25	1	1160	R60N8T	3R14	1460	RWL60N8T	317R18
60	1	1	.9	.8	1	1270	R60M9	5R14	1570	RWL60M9	517R18
60	1	2.5	2.1	1.7	1	1370	R60M13	5R18	1670	RWL60M13X	517R20
60	1	5	4.1	3.3	1	1575	R60H11	7R18	1875	RWL60H11	719R20
60	1	7	5.8	4.6	1	1845	R60H16	7R20	2145	RWL60H16	719R25
120	1	.12	.12	.12	1	1180	R120N8T	3R14	1480	RWL120N8T	317R18
120	1	.5	.5	.4	1	1295	R120M6	5R14	1595	RWL120M6	517R18
120	1	1.2	1.1	1	1	1400	R120M13	5R18	1700	RWL120M13X	517R20
120	1	2.5	2	1.6	1	1615	R120H11	7R18	1915	RWL120H11	719R20
120	1	3.5	2.9	2.3	1	1890	R120H16	7R20	2190	RWL120H16	719R25
125	1	.12	.12	.12	1	1200	R125N8T	3R14	1500	RWL125N8T	317R18
125	1	.4	.4	.4	1	1315	R125M6	5R14	1615	RWL125M6	517R18
125	1	1.2	1.1	1	1	1420	R125M13	5R18	1720	RWL125M13X	517R20
125	1	2.4	1.9	1.5	1	1635	R125H11	7R18	1935	RWL125H11	719R20
125	1	3.4	2.8	2.3	1	1910	R125H16	7R20	2210	RWL125H16	719R25



Redundant Power Packages (continued)

LINEAR REGULATED

Rack Mounting & Wall Mounting



Wall Mounting



(Ammeters optional)

PARALLELEABLE "SEMISYSTEM" POWER SUPPLIES

LINEAR REGULATED

Two units connected in parallel function the same as a Redundant Power Package.



SHIPPED WITHIN 9 DAYS

FIVE YEAR WARRANTY

ALL MODELS U.L. RECOGNIZED

CASE SIZES:

Rack Mounting:

- 3R14** 3½" x 19" panel, 14¹³/₁₆" deep. (15 lb.)
- 5R14** 5¼" x 19" panel, 14¹³/₁₆" deep. (23 lb.)
- 5R18** 5¼" x 19" panel, 17⁷/₈" deep. (29 lb.)
- 7R18** 7" x 19" panel, 18½" deep. (50 lb.)
- 7R20** 7" x 19" panel, 20½" deep. (64 lb.)

Wall Mounting: See page 47.

Each supply contains a voltmeter, isolation diodes, a voltage monitor circuit providing contacts for control of an external alarm (or built-in audible alarm) and overvoltage protection circuit, so that two paralleled units are functionally equivalent to a Redundant Power Package. All connections are by means of a Jones connector (mate provided), so that one supply may be quickly, easily and safely installed in or removed from the rack while another provides uninterrupted power to the load. For a redundant system, order two units.

Specifications: Same as shown under SPECIFICATIONS on page 43 for Linear Redundant Power Packages.

Case Size: 5¼" x 19" panel, 16¹³/₁₆" deep. (53 lbs.)

To allow for mating connector and radius of wiring, mounting space should be at least 20" deep.

PARALLELEABLE "SEMISYSTEM" POWER SUPPLIES Linear Regulated

For a redundant system, order two units.

Nominal Output Voltage	Adjust Range ±V	Output Current Amps. at		Ripple mV RMS	(\$) Price	Model	Case Size
		40°C	55°C				
5	.5	55	43	1	1095	R5PH17	5R17
12	.5	41	32	1	1095	R12PH17	5R17
15	.5	37	29	1	1095	R15PH17	5R17
24	.5	28	22	1	1095	R24PH17	5R17
28	.5	27	21	1	1095	R28PH17	5R17
48	.5	15	12	1	1095	R48P17	5R17

OPTIONS



Add option suffixes in alphabetical order.

Ammeter: Add suffix letter "A" to model number and \$45.00 to unit price.

Handles: Add suffix "H" to model number and \$30.00 to unit price.

Audible Alarm: Whistle alerts personnel to voltage lower than normal. Front panel mounted. Units with this option do not have provision for control of an external alarm. Add suffix "K" to model number and \$45.00 to unit price.

230 Volt Input: For operation on inputs of 210-250 VAC, 50-400 Hz. To order, add suffix "-230" to model number and \$40.00 to unit price. Requires two additional days.

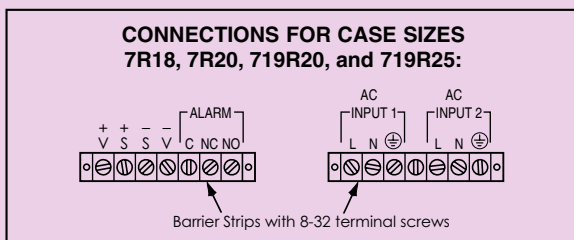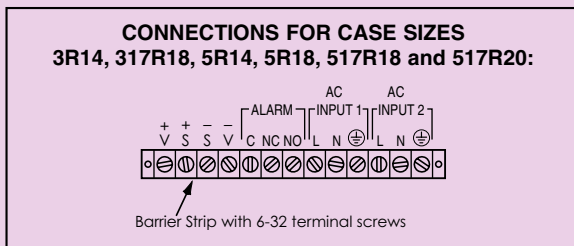

It's easy to find what you need at www.acopian.com or www.find_a_power_supply.com
P.O. Box 638, Easton, PA 18044 • Phone: (610) 258-5441 • FAX: (610) 258-2842




SWITCHING REGULATED REDUNDANT POWER PACKAGES

Rack Mounting & Wall Mounting

AC-DC
single output

- Shipped Within 9 Days
- All Models U.L. Recognized
- Five Year Warranty

An Acopian Redundant Power Package is installed by simply connecting the AC input and DC output terminals. All wiring (including isolation diodes, output monitor circuits, switches, meters, adjustments and connectors) has been done for you.

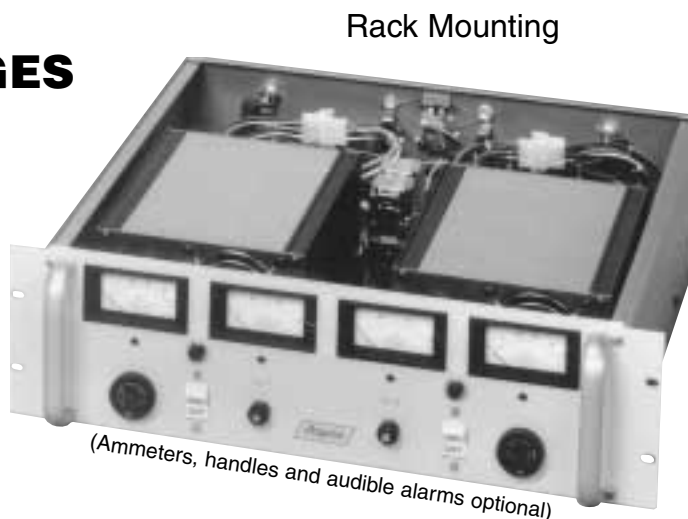

(Ammeters, handles and audible alarms optional)

For Specifications and other information, see pages 42 & 43.

OPTIONS

Add option suffixes in alphabetical order.
Example: R12W6AH-230.

Ammeters: One for each output. Add suffix letter "A" to model number and \$90.00 to price.

Audible Alarms: Piercing whistle alerts personnel to a voltage lower than normal. Front panel mounted, one for each power supply. Units with this option do not have provision for control of an external alarm. To order, add suffix "K" to model number and \$90.00 to price.

Handles (for Rack Mounting models): Add suffix "H" to model number and \$30.00 to price.

Terminal Strip Cover: Clips on.
Wall Mounting models: Standard.
Rack Mounting models: To order, add suffix "M" to model number and \$10.00 to price.

Chassis Slides (for Rack Mounting models): For racks having rear mounting rails spaced 20" to 26" behind the front panel. To order, add suffix "S" to model number and \$90.00 to price.

230 Volt Input: For operation on inputs of 180-264 VAC, 49-61 Hz. To order, add suffix "-230" to model number and \$100.00 to price. Requires two additional days.

Rack Mounting Case Sizes:


- 5RW16** 5 1/4" x 19" panel, 16 13/16" deep. (21 lb.)
- 5RW18** 5 1/4" x 19" panel, 18 13/16" deep. (27 lb.)
- 5RW22** 5 1/4" x 19" panel, 22 13/16" deep. (32 lb.)

Wall Mounting Case Sizes: See page 47.


Switching Regulated REDUNDANT POWER PACKAGES

Nominal Output Voltage	Adjust Range ±V	Output Current Amps. at			Ripple mV (@ 25 MHz BW)		Rack Mounting Models			Wall Mounting Models		
		40°C	55°C	71°C	RMS	P-P	(\$) Price	Model	Case Size	(\$) Price	Model	Case Size
12	.5	26	22	18	15	100	1995	R12W6	5RW16	2295	RWL12W6	519RW15
12	.5	41	35	28	15	100	2395	R12W9	5RW18	2695	RWL12W9	519RW18
12	.5	61	52	42	15	100	2795	R12G7	5RW22	3095	RWL12G7	522RW17
15	.5	21	18	15	15	100	1995	R15W6	5RW16	2295	RWL15W6	519RW15
15	.5	33	28	23	15	100	2395	R15W9	5RW18	2695	RWL15W9	519RW18
15	.5	49	42	34	15	100	2795	R15G7	5RW22	3095	RWL15G7	522RW17
24	.5	15	13	11	15	100	1995	R24W6	5RW16	2295	RWL24W6	519RW15
24	.5	24	21	17	15	100	2395	R24W9	5RW18	2695	RWL24W9	519RW18
24	.5	36	31	25	15	100	2795	R24G7	5RW22	3095	RWL24G7	522RW17
24	.5	50	42	35	15	100	2995	R24W7	5RW22	3295	RWL24W7	522RW17
28	.5	13	11	9	15	100	1995	R28W6	5RW16	2295	RWL28W6	519RW15
28	.5	20	17	14	15	100	2395	R28W9	5RW18	2695	RWL28W9	519RW18
28	.5	30	26	21	15	100	2795	R28G7	5RW22	3095	RWL28G7	522RW17
28	.5	42	35	29	15	100	2995	R28W7	5RW22	3295	RWL28W7	522RW17
48	.5	8	7	5	25	150	1995	R48W6	5RW16	2295	RWL48W6	519RW15
48	.5	12	10	8	25	150	2395	R48W9	5RW18	2695	RWL48W9	519RW18
48	.5	19	16	13	25	150	2795	R48G7	5RW22	3095	RWL48G7	522RW17
48	.5	25	21	17	25	150	2995	R48W7	5RW22	3295	RWL48W7	522RW17

CONNECTIONS:

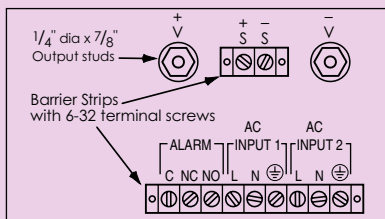

RACK MOUNTING

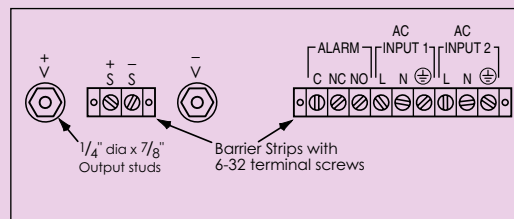

WALL MOUNTING



Redundant Power Packages (continued)


SWITCHING REGULATED

Rack Mounting & Wall Mounting

Wall Mounting



Wall Mounting Case Sizes:

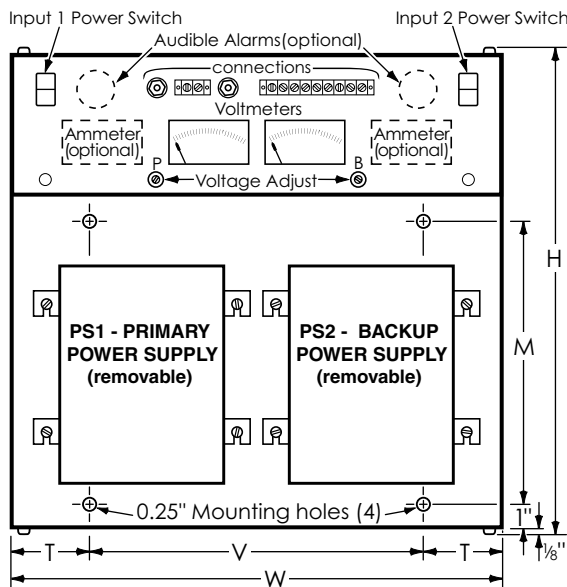

Case Size	H	W	M	V	T	Depth	Approx. Weight
317R18	18 1/2"	17	11	14	1 1/2	4 1/4	18 lb.
517R18	18 1/2"	17	11	14	1 1/2	6	22-26 lb.
517R20	20 1/2"	17	13	13	2	6	34 lb.
519RW15	15 1/2"	19	8	13	3	6 1/16	24 lb.
519RW18	18 1/2"	19	11	13	3	6 1/16	27 lb.
522RW17	17 1/4"	22 1/2	10	16 1/2	3	6 1/16	33 lb.
719R20	20 1/2"	19	13	13	3	7 3/4	58 lb.
719R25	25 1/2"	19	18	13	3	7 3/4	70 lb.

Find Power Supply by Model Number

Over 500,000 different Acopian model numbers are possible considering all the different combinations of outputs, inputs and options available. However, **by matching the model number format of the power supply you are looking for with the model number format from the list below, you will be able to find the page it is on.**

- In the model number that you are looking for, use the letters to match the format below. (The numbers(#), which indicate voltage and current, will vary depending on your particular model number. The letters do not vary.)
- Ignore V or 3V if it is in the front of the model number you are looking for.
- Option letter prefixes E and R are included with parenthesis around them, (E) and (R), in the list below.
- Ignore any of these option letters/numbers which may appear at the end of the model number you are looking for: A, F, G, H, K, L, M, P, S, T, Y or -230.

Model Number Format	Page	Model Number Format	Page
A#H#	22-23	P#HP#	7
A#HT#	23	P#HX#	27
A#HX#	27	P#MX#	27
A#MT#	22-23	P#PX#	39
A#MX#	27	PD#-#	41
A#NT#	25	#PT#	41
A#NX#	27	#PH#	41
A#PX#	39	R#G#	46
A#TN#	25	R#H#	44
A#XN#	27	R#M#	44
B#FT#	25	R#N#X	44
B#G#	22-23	R#N#T	44
B#GT#	23	R#P#	45
B#TN#	25	R#PH#	45
D#-#	11	R#W#	46
D#-#A	11	RM#H#	48
#D#A	32	RM#H#C#	48
DB#-#	13	RM#M#	48
D#E#-#E#D	11	RM#M#C#	48
#E#	9	RM#N#T	48
#E#A	9	RM#N#TC#	48
#E#D-#E#D	11	RM#N#X	48
#E#D-D#E#	11	RM#N#XC#	48
#E#D#	17	RWL#G#	46
#E#E#	17	RWL#H#	44
#EB#	13	RWL#M#	44
#EB#E#	19	RWL#M#X	44
#EB#D#	19	RWL#N#T	44
(E)#J#	53	RWL#N#X	44
(E)#J#D-#J#D	55	RWL#W#	46
(E)#X#	60	(R)#J#	53
(E)J#	53	(R)#J#D-#J#D	55
(E)P#HX#	27	(R)B#G#	22-23
(E)P#MX#	27	(R)B#GT#	23
(E)P#PX#	39	(R)J#	53
FD#-#A	28	TD#-#	28
#GT#D-#GT#D	30-31	#T#A	33
J#	53	U#	59
#J#	53	U#Y#	35
#J#D-#J#D	55	U#YA#	35
JD#-#	57	#U#	59
LD#-#	28	#UA#	59
N#HA#	5	#UP#	59
N#HD#	3	#UY#	35
N#HP#	7	UP#	59
NX#	9	US#	59
NX-#A	9	W#GT#	37
NX-#B	13	W#MT#	37
P#HA#	5	#WB#	15
P#HD#	3	#WL#	15
		#X#	60




It's easy to find what you need at www.acopian.com or www.find_a_power_supply.com
 P.O. Box 638, Easton, PA 18044 • Phone: (610) 258-5441 • FAX: (610) 258-2842



LINEAR REGULATED MODULAR REDUNDANT SYSTEMS

AC-DC
single output

- Shipped Within 9 Days
- Five Year Warranty

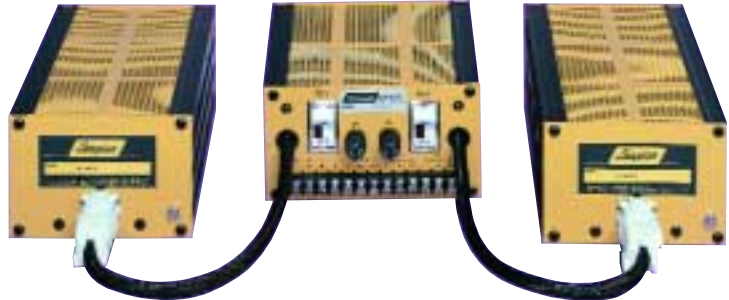

These systems have the versatility to be mounted in a wide variety of ways - within a system cabinet, on a DIN rail or to a wall. Another benefit is that the three modules need not be mounted together, so that if a control panel is crowded, just the Integration Module may be mounted there and the power supplies mounted elsewhere.

For Specifications and other information, see pages 42 & 43.

System Description: Each Modular Redundant DC Power System consists of three units: two identical power supplies connected to an Integration Module by 24" long cables. The Integration Module includes the diodes for isolating the power supply outputs, AC input switches, input fuses, LED 'output present' indicators, failure alarm circuits, and the umbilical cables which plug into the power supplies. Connections for the AC inputs, redundant DC output and failure alarm relays are on a screw terminal strip.

Mounting: Each module has threaded mounting holes which permit mounting to a chassis, cabinet wall or bracket, or they may be used on a test bench or tabletop. To mount from the power supply side of the mounting surface or for DIN rail mounting, use an Accessory Mounting Kit (see page 49).

Terminal Strip Cover: Clips on.

Interconnection: The Integration Module cables are 24" long.

OPTIONS

Cable lengths: Although 24" is standard, any other length from 12" to 60" may be ordered as an option. To order, add suffix "C??" to model number and \$60.00 to price. Fill in the "???" with the cable length desired. For example, if you are ordering Model RM24M9 with 4 foot (48") cables, the model number would be RM24M9C48, and the price would be \$995.00+\$60.00=\$1055.00.

230 Volt Input: All models can be alternately furnished for operation on inputs of 210-250 VAC, 50-400 Hz. To order, add suffix "-230" to model number and \$80.00 to price. The "-230" option requires two additional days.


Linear Regulated MODULAR REDUNDANT SYSTEMS

Nominal Output Voltage	Adjust Range ±V	Output Current Amps. at			Ripple mV RMS	(\$) Price	Model	Case sizes	
		40°C	55°C	71°C				Integration Module	Power Supplies (2)
5	.5	2.6	2.5	2.4	1	895	RM5N8X	RM6	CN8H
5	.5	5.3	4.4	3.5	1	995	RM5M6	RM6	CM6
5	.5	11	9.3	7.5	1	1095	RM5M13	RM6	CM13
5	.5	21	17	14	1	1295	RM5H11	RM6	CH11
12	.5	1.5	1.5	1.5	1	895	RM12N8X	RM6	CN8H
12	.5	3.5	3	2.5	1	995	RM12M6	RM6	CM6
12	.5	8	7.5	7	1	1095	RM12M13	RM6	CM13
12	.5	16	13.8	11.2	1	1295	RM12H11	RM6	CH11
12	.5	20	17	14.2	1	1495	RM12H16	RM6	CH16
15	.5	1.5	1.5	1.5	1	895	RM15N8X	RM6	CN8H
15	.5	4	3.8	3.6	1	995	RM15M9	RM6	CM9
15	.5	6.5	6	5.5	1	1095	RM15M13	RM6	CM13
15	.5	14.7	12.5	10.3	1	1295	RM15H11	RM6	CH11
15	.5	18.7	16	13.3	1	1495	RM15H16	RM6	CH16
24	.5	.9	.9	.9	1	895	RM24N8X	RM6	CN8H
24	.5	3	2.7	2.4	1	995	RM24M9	RM6	CM9
24	.5	5	5	5	1	1095	RM24M13	RM6	CM13
24	.5	11.7	10.2	8.7	1	1295	RM24H11	RM6	CH11
24	.5	14.7	12.7	10.7	1	1495	RM24H16	RM6	CH16
28	.5	1	1	1	1	895	RM28N8X	RM6	CN8H
28	.5	2.7	2.6	2.5	1	995	RM28M9	RM6	CM9
28	.5	5	5	5	1	1095	RM28M13	RM6	CM13
28	.5	10.5	9.2	8	1	1295	RM28H11	RM6	CH11
28	.5	14	12	10	1	1495	RM28H16	RM6	CH16
48	.5	.4	.4	.4	1	930	RM48N8T	RM6	CN8T
48	.5	1.6	1.4	1.2	1	1040	RM48M9	RM6	CM9
48	.5	3	3	3	1	1140	RM48M13	RM6	CM13
48	.5	6	5	4	1	1345	RM48H11	RM6	CH11
48	.5	8.5	7.2	5.5	1	1635	RM48H16	RM6	CH16
60	1	.25	.25	.25	1	960	RM60N8T	RM6	CN8T
60	1	1	.9	.8	1	1070	RM60M9	RM6	CM9
60	1	2.5	2.1	1.7	1	1170	RM60M13	RM6	CM13
60	1	5	4.1	3.3	1	1375	RM60H11	RM6	CH11
60	1	7	5.8	4.6	1	1645	RM60H16	RM6	CH16
120	1	.12	.12	.12	1	980	RM120N8T	RM6	CN8T
120	1	.5	.5	.4	1	1095	RM120M6	RM6	CM6
120	1	1.2	1.1	1	1	1200	RM120M13	RM6	CM13
120	1	2.5	2	1.6	1	1415	RM120H11	RM6	CH11
120	1	3.5	2.9	2.3	1	1690	RM120H16	RM6	CH16
125	1	.12	.12	.12	1	1000	RM125N8T	RM6	CN8T
125	1	.4	.4	.4	1	1115	RM125M6	RM6	CM6
125	1	1.2	1.1	1	1	1220	RM125M13	RM6	CM13
125	1	2.4	1.9	1.5	1	1435	RM125H11	RM6	CH11
125	1	3.4	2.8	2.3	1	1710	RM125H16	RM6	CH16



MODULAR REDUNDANT SYSTEMS (continued)

INTEGRATION MODULE

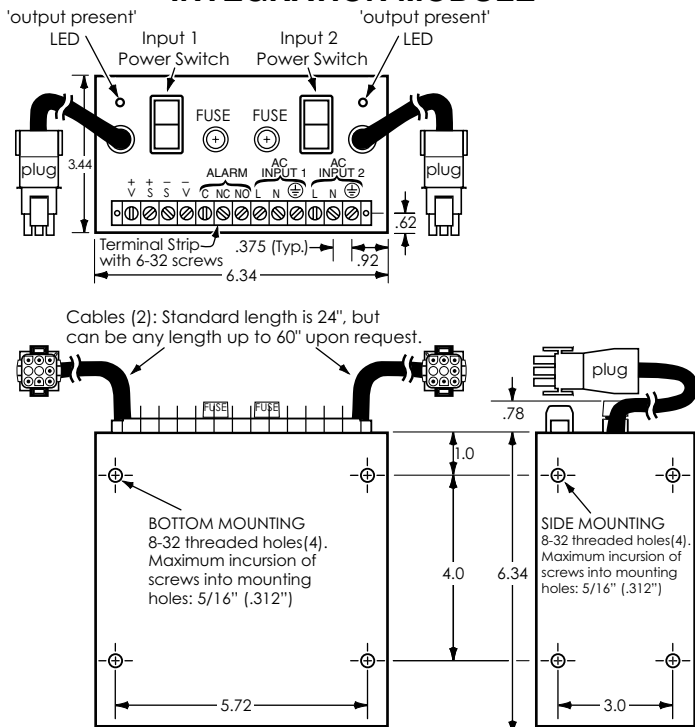


Cables (2): Standard length is 24", but can be any length up to 60" upon request.

For **REAR MOUNTING**, remove original screws(4) and use 8-32 Type F self-tapping screws. They should extend at least 5/16" (0.312") into the power supply case.

Case Size RM6
Approx. Weight: 5 lb. 10 oz.

POWER SUPPLIES

(Two in each Modular Redundant System)

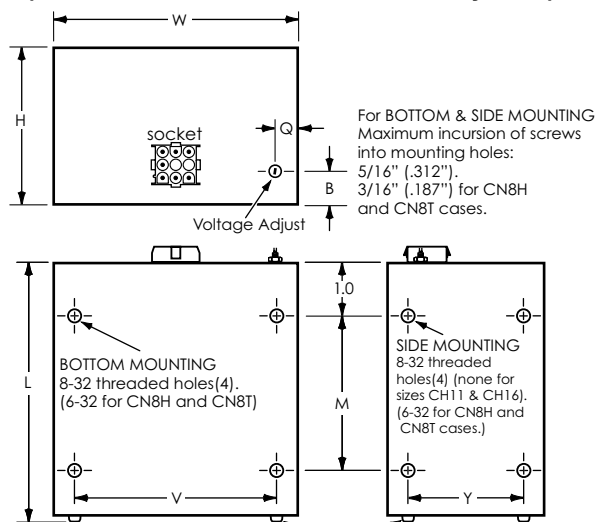

For **BOTTOM & SIDE MOUNTING** Maximum incursion of screws into mounting holes: 5/16" (.312"). 3/16" (.187") for CN8H and CN8T cases.

For **REAR MOUNTING**, remove original screws(4) and use 8-32 Type F self-tapping screws. They should extend at least 5/16" (0.312") into the power supply case.
For **REAR MOUNTING of CN8H and CN8T cases**, remove original 6-32 screws(4). These screws may then be used for mounting, provided they extend at least 1/4" (0.250") into the power supply case.

Case Size	L	W	H	M	V	Y	Q	B	Approx. Weight
CM6	6.59	5.12	3.44	4.0	4.5	3.0	.5	.75	4 lb. 4 oz.
CM9	9.25	5.12	3.44	6.0	4.5	3.0	.5	.75	7 lb. 4 oz.
CM13	13.25	5.12	3.44	10.0	4.5	3.0	.5	.75	11 lb.
CH11	11.25	7.37	5.12	8.0	6.75	4.56	1.12	1.25	18 lb. 4 oz.
CH16	16.00	7.37	5.12	11.0	6.75	4.56	1.12	1.25	26 lb.
CN8H	8.47	4.68	1.68	5.0	3.12	1.31	2.87	1.31	3 lb. 14 oz.
CN8T	8.47	3.84	1.68	5.0	3.12	1.31	2.87	1.31	3 lb. 2 oz.

ACCESSORY MOUNTING KITS

- **FOR WALL MOUNTING** (See page 37 for illustration.)

These kits provide a way of mounting power supplies on a wall or panel when the other side of the mounting surface is inaccessible. Each kit consists of four aluminum brackets and four machine screws for fastening them to the power supply, effectively adding mounting flanges to the power supply.

For case sizes RM6, CM6, CM9, CM13, CH11, CH16

GB8 Mounting Kit (#8-32 mounting holes) \$8

For case size CN8T

NP6 Mounting Kit (#6-32 mounting holes) \$8

For case size CN8H

NP6L Mounting Kit (#6-32 mounting holes) \$8

Model NP6L consists of two brackets 1.5" long and two 2.5" long brackets (to extend beyond heat sink).

- **FOR DIN RAIL MOUNTING** (See page 37 for illustration.)

For Rear Mounting

GR35DIN Mounting Kit \$15.00

Fits on case sizes RM6, CM6, CM9.

(Can be used, but not recommended, on case size CM13.)

NPR35DIN Mounting Kit \$15.00

Fits on case sizes CN8H, CN8T.

For Horizontal Mounting

CH35DIN Mounting Kit \$15.00

Fits on case size RM6.


GH35DIN Mounting Kit \$15.00

Fits on case sizes CM6, CM9, CM13.

NPH35DIN Mounting Kit \$15.00

Fits on case sizes CN8H, CN8T.

Simplified Diagram for Modular Redundant Systems

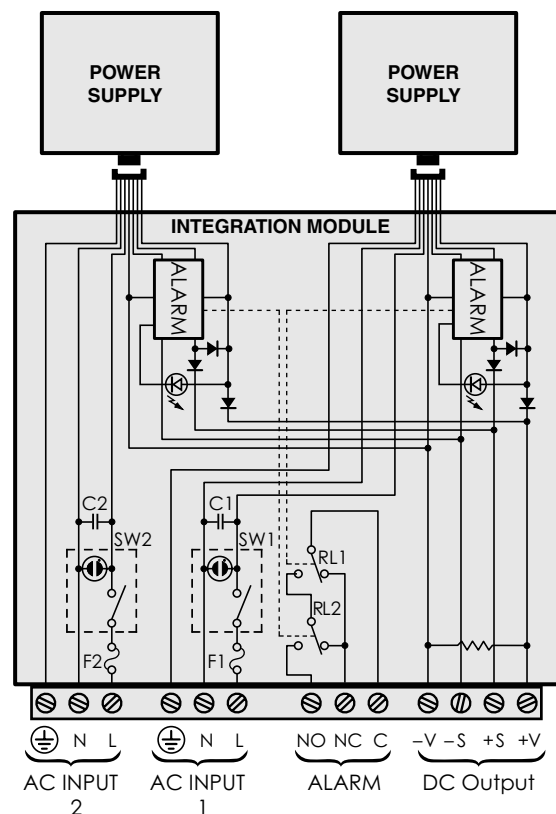


It's easy to find what you need at www.acopian.com or www.find.a.power.supply.com
P.O. Box 638, Easton, PA 18044 • Phone: (610) 258-5441 • FAX: (610) 258-2842



POWER SYSTEMS



CONTAINING ANY POWER MODULES YOU NEED

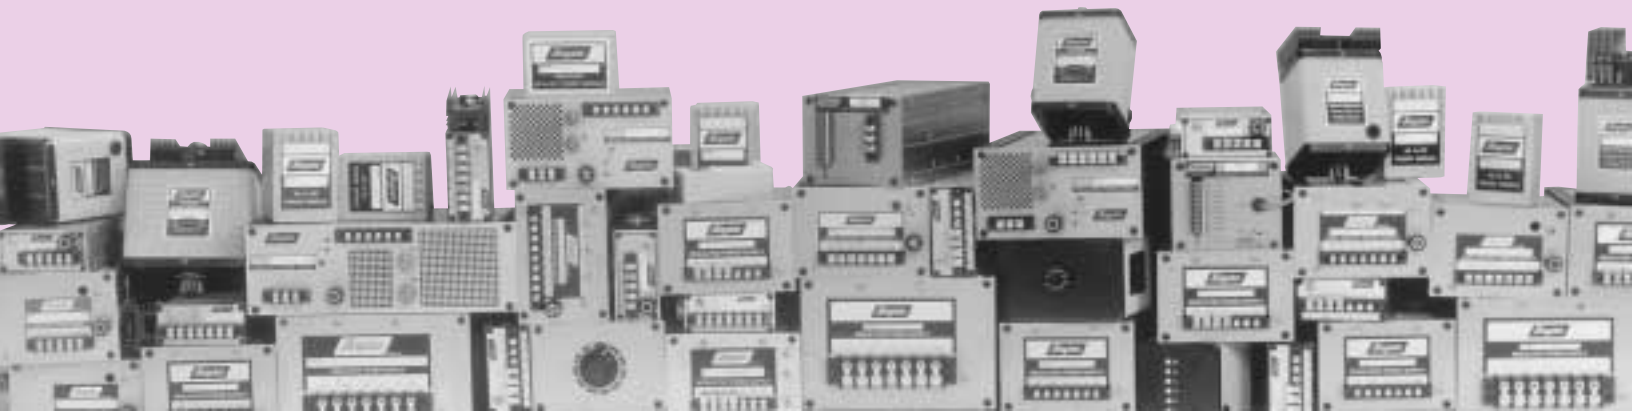

SHIPPED TO YOU IN JUST 9 DAYS



It's easy to find what you need at www.acopian.com or www.find a power supply.com
P.O. Box 638, Easton, PA 18044 • Phone: (610) 258-5441 • FAX: (610) 258-2842

Design your Power System on the phone

Fill your requirements for completely wired multiple-output Power Systems without preparing time consuming mechanical layouts, detailed purchase requisitions or searching through a power supply catalog. **Simply call Acopian and specify the output voltages and currents and any operating features that you require.**

Acopian production expertise assures that each system will be completely wired, tested and **shipped within 9 days** after receipt of your order.




Four outputs, each separately switched, are provided by this 5 1/4" high assembly. The voltmeter and ammeter may be switched to monitor any output.

SHIPPED WITHIN 9 DAYS

Ordering an Acopian Power System is this easy:

- List the DC output ratings you require. Or, select the power modules that you wish to be included. Any module in this catalog can be used.
- An AC input power switch with indicator is standard. List any additional assembly features you would like included - output controls, analog meters, test points, individual fusing or switches, handles, chassis slides, etc. (If you require non-stocked components, such as special connectors or circuit breakers, more than 9 days may be required.)
- Determine if any size restrictions are necessary. Assemblies of unusual size or shape (other than 19" wide, or more than 7" high) may require more than 9 days.
- Call Acopian and ask for the Power Systems Dept.
- An Acopian Applications Engineer will answer - on the phone - any questions which you may have.
- A distinctive system model number will be assigned, and a firm price will be quoted. Your completely-wired power supply system will be **shipped within 9 days.**

Shown are just a few examples of the unlimited variety of assemblies that Acopian can build and ship within 9 DAYS.

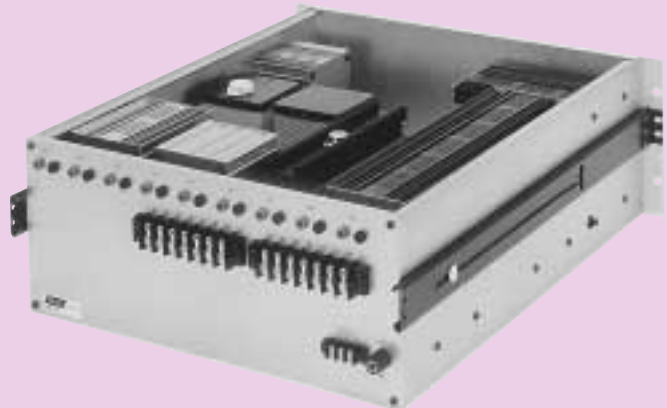

Test points for all outputs, in addition to screw terminals for all input and output connections, are on the rear panel of this 7" high assembly. Chassis slides permit easy access.




This system provides seven different outputs and is fully metered, yet occupies only 3 1/2" of rack space.



Front panel adjustments, each with a shaft lock to prevent accidental changes, permit easy calibration of the eight outputs provided by this 7" high assembly.



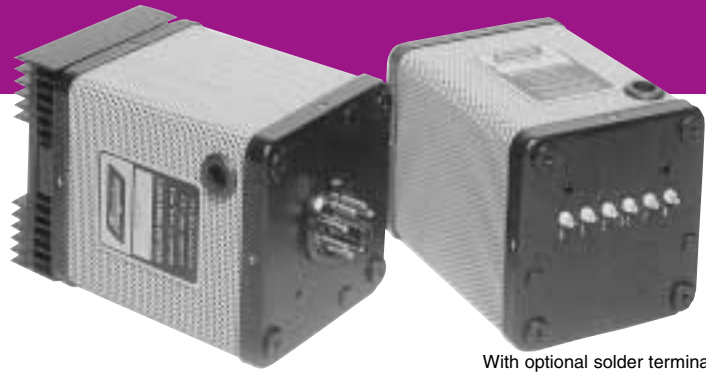

With optional solder terminals.

Plug-in SINGLE OUTPUT & WIDE ADJUST OUTPUT

LINEAR REGULATED
AC-DC

- Shipped Within 3 Days
- All Models U.L. Recognized
- Five Year Warranty

An Acopian Plug-in power module can be installed in a matter of seconds. Simply plug it into a standard octal socket. (Threaded mounting holes are provided in the base for fastening the module when used in other than the upright position, or if subject to extreme vibration.) To replace a module - for example, where added circuitry calls for a higher current rating - just unplug the old, plug in the new. And as a result of years of product refinement, your Acopian Plug-in provides the highest reliability of any available series-regulated power supply.

STANDARD FEATURES

- May be used in series
- Delivers current surges without damage - to protect against prolonged overload and shorts, use of an input fuse is recommended
- No derating or additional heat sinking required
- Completely serviceable
- Lightweight

SPECIFICATIONS

Input Voltage: 105-125 VAC, 50-400 Hz, single phase.

Output Specifications: See table.

Polarity: Output floating; either positive or negative terminal may be grounded or floated up to 300 volts above ground.

Temperature Coefficient: 0.02%/°C (Typical).



Ambient Operating Temperature: -10 to +65°C.
No derating required.

MIL Tested and Extended Temperature Range:
See page 56.

Storage Temperature: -55 to +85°C.

Installation: Plugs into standard 8-pin octal socket (see page 56). Four mounting holes (6-32) are provided in the base for fastening the module when used in other than the upright position, or if extreme vibration will be encountered.

PIN CONNECTIONS:
Standard model.

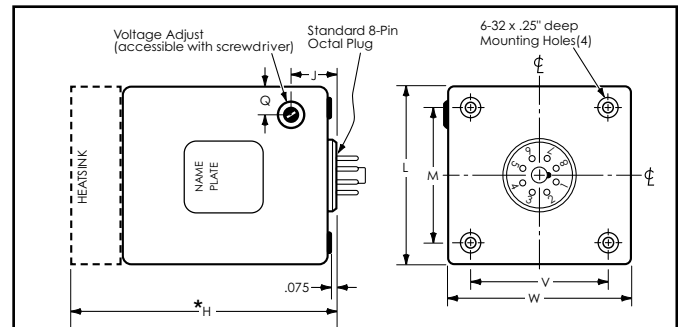


*H dimension includes HEATSINK on BS, US, WS, and HS case sizes.

Case Size	L	W	H*	M	V	J	Q	Approx. Weight
AS	3.40	3.28	4.67	2.625	2.625	1.00	.66	2 lb. 8 oz.
BS	3.40	3.28	5.33	2.625	2.625	1.00	.66	2 lb. 14 oz.
TS	3.33	4.15	4.85	2.562	2.750	1.12	.62	3 lb. 6 oz.
US	3.33	4.15	5.53	2.562	2.750	1.12	.62	3 lb. 8 oz.
WS	3.40	5.02	5.53	2.562	3.562	1.12	.62	4 lb. 14 oz.
HS	3.40	5.02	6.65	2.562	3.562	1.12	.62	5 lb.


OPTIONS

Solder Terminals: All models can be furnished with solder terminals instead of the octal type plug. Contact factory or see web site for detailed information.

Remote Output Adjustment: All models have a local voltage adjustment. When provision for remote (external) adjustment is also desired, add prefix "E" to model number. Example: Model 12J100 becomes Model E12J100. No increase in price.



Remote Sensing: Provision for remote sensing of the output voltage to compensate for drops in the load lines can be furnished at an additional charge of \$10.00 per unit. Add prefix "R" to model number when ordering. "R" power supplies have a local voltage adjustment and provision for remote (external) output adjustment.

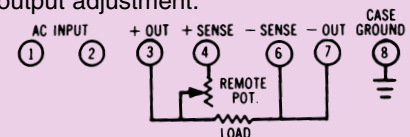

230 Volt Input: All models can be alternately furnished for operation on inputs of 210 to 250 VAC, 50-400 Hz. Add suffix "-230" to model number and \$25.00 to price. The "-230" option requires two additional days.

Oversvoltage Protection: An internal preset oversvoltage protector is available. To order, add prefix "V" to the model number, and add \$25.00 to the standard price of models with outputs of 1 to 70 volts; \$35.00, for 75 to 200 volt outputs.






Plug-in DUAL ISOLATED OUTPUTS (User-selectable)

LINEAR REGULATED
AC-DC

- Shipped Within 3 Days
- All Models U.L. Recognized
- Five Year Warranty

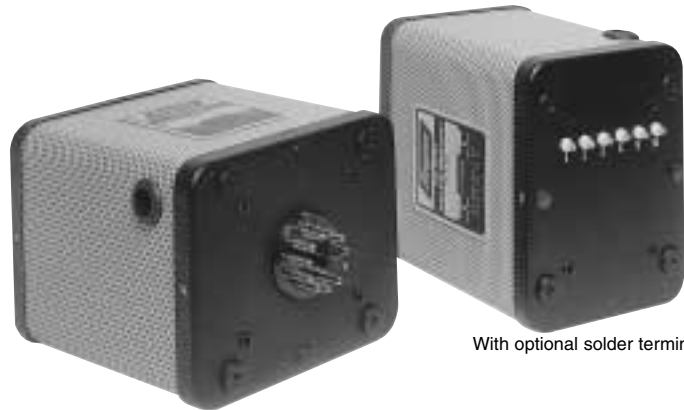

With optional solder terminals.

Space-saving Acopian duals combine two electrically independent DC outputs in a single case. Either identical or different outputs may be selected. And every combination is supplied with Acopian's usual 3 day shipment guarantee and 5 year warranty.

Like all Acopian Plug-ins, a dual-output module can be installed in seconds. Simply plug it into a standard 11-pin socket. Acopian duals are exceptionally dependable, too - offering the highest reliability of any available series-regulated power supply.

SPECIFICATIONS

Input Voltage: 105-125 VAC, 50-400 Hz, single phase.

Output Specifications: See page 55.

Polarity: Outputs are floating. Each section may be independently connected to provide any combination of positive and negative outputs.

Short Circuit Protection: Delivers current surges without damage—to protect against prolonged overloads and shorts, use of an input fuse is recommended.

Temperature Coefficient: 0.02%/°C (Typical).

Ambient Operating Temperature: -10 to +65°C.
No derating required.

MIL Tested and Extended Temperature Range:
See page 56.

Storage Temperature: -55 to +85°C.

Installation: Plugs into standard 11-pin octal-type socket (see page 56). Four mounting holes (6-32) are provided in the base for fastening the module when used in other than the upright position, or if extreme vibration will be encountered.


HOW TO ORDER

Select two **sections** from the table on page 55. The complete model number is the combination of the two **sections** selected. Example: The combination of section 6J40D and section 12J100D is Model 6J40D-12J100D. Always assign the lower voltage section first. (Two of the same section can also be selected.) Where the indicated case sizes for the two sections differ, the larger case size applies.

For pricing purposes, add the costs of the individual sections selected. Example: The price of Model 6J40D-12J100D is \$215.00 total (\$95.00 plus \$120.00).

PIN CONNECTIONS:


Standard model.




OPTIONS

Solder Terminals: All models can be furnished with solder terminals instead of the octal type plug. Contact factory or see web site for detailed information.

Remote Output Adjustment: All models have local voltage adjustments. When provision for remote (external) adjustments is also desired, add prefix "E" to model number. Example: E6J40D-12J100D. (No increase in price.)

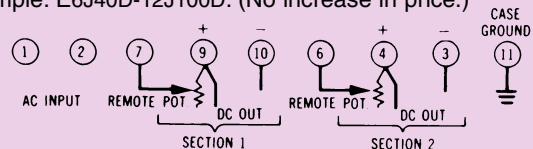

Remote Sensing: Provision for remote sensing of the output voltages, to compensate for drops in the load lines, can be furnished at an additional charge of \$20.00 per unit. Add prefix "R" to model number when ordering. "R" power supplies have local voltage adjustments and provision for remote (external) output adjustments.

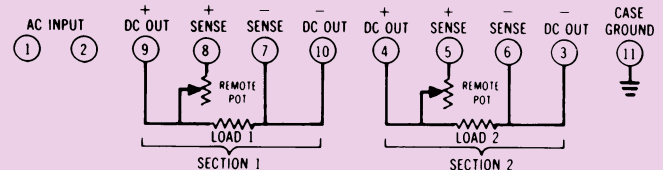

230 Volt Input: All models can be alternately furnished for operation on inputs of 210 to 250 VAC, 50 to 400 Hz. Add suffix "-230" to model number and \$25.00 to price. The "-230" option requires two additional days.

Overvoltage Protection: Two separate, preset overvoltage protection circuits, one for each output. To order, add prefix "V" to model number and add \$30.00 to the standard price for outputs up to 70 volts; add \$50.00 if either or both outputs are greater than 70 volts.




Plug-in DUAL ISOLATED OUTPUTS (continued)

(User-selectable)

LINEAR REGULATED

Nominal Output Voltage	Adjust Range $\pm V$	Output Current Amps.	Regulation		Ripple mV RMS	(see 'How to Order')		Case Size
			Load $\pm \%$	Line $\pm \%$		Price per Section (\$)	Section	
3.3	.5	.500	.5	.05	1	100	3.3J50D	TDJ
3.3	.5	.700	.5	.05	1	105	3.3J70D	UDJ
3.3	.5	1.0	.5	.05	1	115	3.3J100D	WDJ
4	1	.500	.3	.05	1	100	4J50D	TDJ
4	.5	.700	.4	.05	1	105	4J70D	UDJ
4	.5	1.0	.5	.05	1	115	4J100D	WDJ
5	1	.400	.3	.05	1	95	5J40D	TDJ
5	1	.500	.3	.05	1	100	5J50D	TDJ
5	.5	.700	.4	.05	1	105	5J70D	UDJ
5	.5	1.0	.5	.05	1	115	5J100D	WDJ
5	.25	2.0	.5	.05	1	140	5J200D	WDJ
6	1	.400	.15	.05	1	95	6J40D	TDJ
6	1	.500	.15	.05	1	100	6J50D	TDJ
6	.5	.700	.2	.05	1	105	6J70D	UDJ
6	.5	1.0	.3	.05	1	115	6J100D	WDJ
7	1	.400	.15	.05	1	95	7J40D	TDJ
7	1	.500	.15	.05	1	100	7J50D	TDJ
7	.5	.700	.2	.05	1	105	7J70D	UDJ
7	.5	1.0	.3	.05	1	115	7J100D	WDJ
8	1	.400	.1	.05	1	95	8J40D	TDJ
8	1	.500	.1	.05	1	100	8J50D	TDJ
8	.5	.700	.15	.05	1	105	8J70D	UDJ
8	.5	1.0	.2	.05	1	115	8J100D	WDJ
9	1	.500	.1	.05	1	100	9J50D	TDJ
9	.5	.700	.15	.05	1	105	9J70D	UDJ
9	.5	1.0	.2	.05	1	115	9J100D	WDJ
10	1	.400	.1	.05	1	95	10J40D	TDJ
10	1	.500	.1	.05	1	100	10J50D	TDJ
10	.5	.700	.15	.05	1	105	10J70D	UDJ
10	.5	1.0	.2	.05	1	115	10J100D	WDJ
12	1	.400	.1	.05	1	95	12J40D	TDJ
12	1	.500	.1	.05	1	100	12J50D	TDJ
12	.5	.700	.1	.05	1	105	12J70D	UDJ
12	.5	1.0	.1	.05	1	120	12J100D	WDJ
13	1	.500	.1	.05	1	100	13J50D	TDJ
13	.5	.700	.1	.05	1	105	13J70D	UDJ
13	.5	1.0	.15	.05	1	120	13J100D	WDJ
15	1	.400	.1	.05	1	95	15J40D	TDJ
15	1	.500	.1	.05	1	100	15J50D	TDJ
15	.5	.700	.1	.05	1	105	15J70D	UDJ
15	.5	1.0	.15	.05	1	120	15J100D	WDJ
18	1	.400	.1	.05	1	95	18J40D	TDJ
18	1	.500	.1	.05	1	100	18J50D	TDJ
18	1	.750	.15	.05	1	110	18J75D	WDJ
18	.5	1.0	.15	.05	1	120	18J100D	WDJ

Nominal Output Voltage	Adjust Range $\pm V$	Output Current Amps.	Regulation		Ripple mV RMS	(see 'How to Order')		Case Size
			Load $\pm \%$	Line $\pm \%$		Price per Section (\$)	Section	
20	1	.400	.1	.05	1	95	20J40D	TDJ
20	1	.500	.1	.05	1	100	20J50D	TDJ
20	1	.750	.15	.05	1	110	20J75D	WDJ
22	1	.400	.1	.05	1	95	22J40D	TDJ
24	1	.400	.1	.05	1	95	24J40D	TDJ
26	1	.400	.05	.05	1	95	26J40D	TDJ
28	1	.400	.05	.05	1	95	28J40D	TDJ
30	1	.400	.05	.05	1	100	30J40D	TDJ
32	1	.300	.05	.05	1	100	32J30D	TDJ
34	1	.300	.05	.05	1	100	34J30D	TDJ
35	1	.200	.05	.05	1	95	35J20D	TDJ
36	1	.200	.05	.05	1	95	36J20D	TDJ
40	1	.200	.05	.05	1	100	40J20D	TDJ
45	1	.200	.05	.05	1	100	45J20D	TDJ
48	1	.200	.05	.05	1	105	48J20D	TDJ
50	1	.200	.05	.05	1	110	50J20D	TDJ
55	1	.200	.05	.05	1	115	55J20D	TDJ
60	1	.100	.05	.05	1	105	60J10D	TDJ
65	1	.100	.05	.05	1	110	65J10D	TDJ
70	1	.050	.05	.05	1	100	70J05D	TDJ
70	1	.100	.05	.05	1	110	70J10D	TDJ
75	1	.100	.05	.05	1	115	75J10D	TDJ
80	1	.100	.05	.05	1	120	80J10D	TDJ
85	1	.100	.05	.05	1	125	85J10D	TDJ
90	1	.100	.05	.05	1	130	90J10D	TDJ
95	1	.100	.05	.05	1	135	95J10D	TDJ
100	1	.100	.05	.05	1	140	100J10D	TDJ
105	1	.100	.05	.05	1	140	105J10D	TDJ
110	1	.100	.05	.05	1	145	110J10D	TDJ
115	1	.100	.05	.05	1	150	115J10D	TDJ
120	1	.100	.05	.05	1	155	120J10D	TDJ
125	1	.100	.05	.05	1	155	125J10D	TDJ
130	1	.100	.05	.05	1	160	130J10D	TDJ
135	1	.100	.05	.05	1	160	135J10D	TDJ
140	1	.100	.05	.05	1	165	140J10D	TDJ
145	1	.100	.05	.05	1	165	145J10D	TDJ
150	1	.100	.05	.05	1	165	150J10D	TDJ

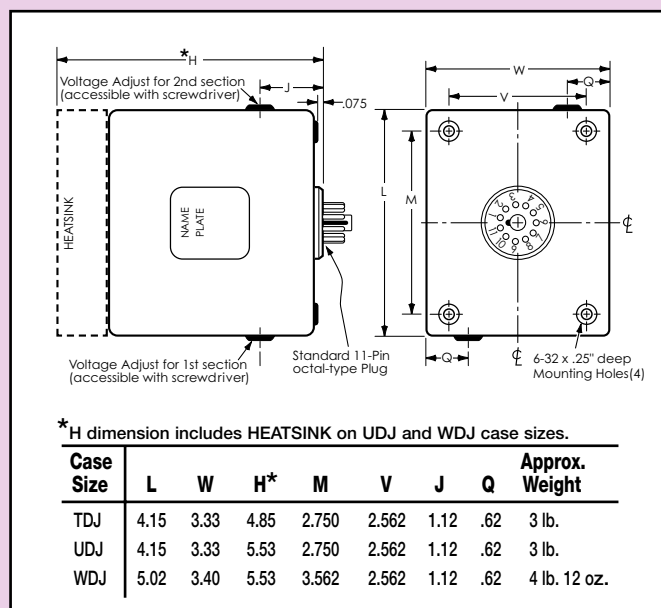




ACCESSORY SOCKETS


RETMA-numbered screw-type terminals simplify wiring and permit the use of wire terminals or bare wire, 12 to 20 gauge. Rated at 300 volts RMS, 10 Amp.

FOR 8-PIN PLUGS

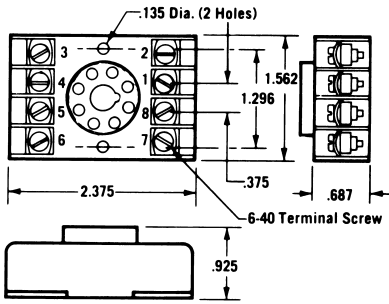

Model SL608..... \$10

FOR 11-PIN PLUGS

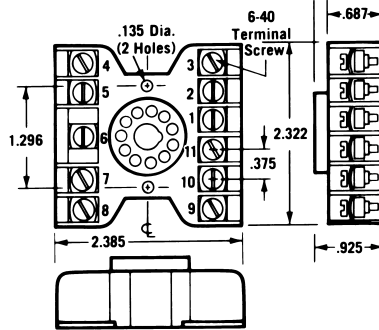

Model SL611..... \$15

MIL TESTED and EXTENDED TEMP RANGE (for Plug-in models on pages 52-55)

SHIPPED WITHIN 3 DAYS
ALL MODELS U.L. RECOGNIZED

Ruggedized construction and capability for operation through an extended ambient temperature range of -20 to +71°C (without derating) are provided by Acopian MIL-option supplies. In all other respects they are identical to our standard Plug-in power supplies.

HOW TO ORDER:

Add prefix "MIL-" to standard model number and \$15.00 to price of single output models; \$30.00 to price of dual output models. Example: Model 6J200 becomes MIL-6J200. Price becomes \$175.00 plus \$15.00; or \$190.00 total.

MIL-option equivalents to all the models included on pages 52 through 55, except those housed in case size HS, have been tested to these specifications:

- ALTITUDE:** MIL-STD-810B, Method 500, Procedure II.
- VIBRATION:** MIL-STD-810B, Method 514, Procedure I, Curve D.
- SHOCK:** MIL-STD-810B, Method 516, Procedure I.
- FUNGUS:** (additional \$15.00/output charge applies.) MIL-STD-810B, Method 508, Procedure I.
- CONDUCTED EMI:** MIL-I-6181D, Paragraph 4.3.1., Figure II.
- RADIATED EMI:** MIL-I-6181D, Paragraph 4.3.2.
- SUSCEPTIBILITY TO CONDUCTED AND RADIATED EMI:** MIL-I-6181D, Paragraph 4.3.4.
- HIGH TEMPERATURE:** MIL-STD-810B, Method 501, Procedure I.
- LOW TEMPERATURE:** MIL-E-5272C, Paragraph 4.2.2, Procedure II.
- HUMIDITY:** MIL-STD-810B, Method 507, Procedure I.
- SALT FOG:** MIL-STD-810B, Method 509, Procedure I.





Plug-in DUAL TRACKING OUTPUTS

LINEAR REGULATED
AC-DC

- Shipped Within 3 Days
- All Models U.L. Recognized
- Five Year Warranty



Optional solder terminals.
See OPTIONS, below.

Dual tracking output Plug-in power supplies provide the balanced voltages commonly required for driving operational amplifiers and related linear circuitry. The convenient plug-in configuration simplifies mounting and wiring, and connections for the remote sensing of the

output voltages, to permit compensation of load line voltage drops, are a standard feature.

SPECIFICATIONS

Input Voltage: 105-125 VAC, 50-400 Hz, single phase.

Output Tracking: Within 1%.

Polarity: Positive output, common, and negative output.

Remote Voltage Sensing: Provision for sensing the output voltage across the load, so that drops in the load lines are compensated, is a standard feature.

Temperature Coefficient: 0.02%/°C (Typical).

Ambient Operating Temperature: -10 to +65°C.
No derating required.

Storage Temperature: -55 to +85°C.

Installation: Plugs into standard 8-pin octal socket (see page 56). Four mounting holes (6-32) are provided in the base for fastening the module when used in other than the upright position, or if extreme vibration will be encountered.

PIN CONNECTIONS:

AC INPUT	+V	+S	COM	-S	-V	CASE GROUND
1	2	3	4	5	6	7
8						


OPTIONS

Solder Terminals: All models can be furnished with solder terminals instead of the octal-type plug. To order, add suffix "L" to model number and \$30.00 to price.

230 Volt Input: All models can be alternately furnished for operation on inputs of 210-250 VAC, 50-400 Hz. Add suffix "-230" to model number and \$25.00 to price. The "-230" option requires two additional days.

Overvoltage Protection: A built-in, preset overvoltage protection circuit is available on all models. If either output fails, both outputs are 'crowbarred'. To order, add prefix "V" to the model number, and increase standard price by \$30.00.

Nominal Output Voltages	Adjust Range ± V	Amps. per Output	Regulation		Ripple mV RMS	(\$) Price	Model	Case Size
			Load ± %	Line ± %				
±5	.25	.750	.1	.1	1.5	200	JD5-75	BD
±5	.25	1.5	.1	.1	1.5	225	JD5-150	DU
±12	1	.400	.1	.1	1.5	175	JD12-40	DA
±12	1	.700	.1	.1	1.5	200	JD12-70	BD
±12	1	1.0	.1	.1	1.5	225	JD12-100	DU
±15	1	.400	.1	.1	1.5	175	JD15-40	DA
±15	1	.700	.1	.1	1.5	200	JD15-70	BD
±15	1	1.0	.1	.1	1.5	225	JD15-100	DU

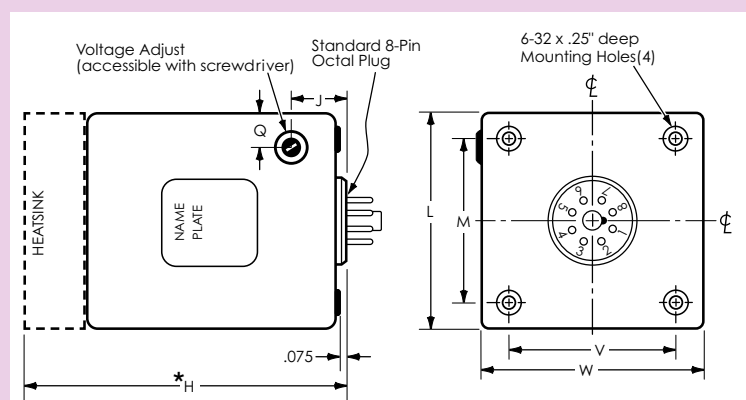

*H dimension includes HEATSINK on BD and DU case sizes.

Case Size	L	W	H*	M	V	J	Q	Approx. Weight
DA	3.40	3.28	4.67	2.625	2.625	1.00	.66	2 lb. 8 oz.
BD	3.40	3.28	5.33	2.625	2.625	1.00	.66	2 lb. 14 oz.
DU	3.33	4.15	5.53	2.562	2.750	1.12	.62	3 lb. 8 oz.






Plug-in UNREGULATED

AC-DC

single output & wide adjust output

- Shipped Within 3 Days
- U.L. Recognized
- Five Year Warranty

To meet the need for unregulated DC power at low cost, Acopian offers a broad line of both fixed and fully adjustable Plug-in power modules with output voltages to 950 volts.

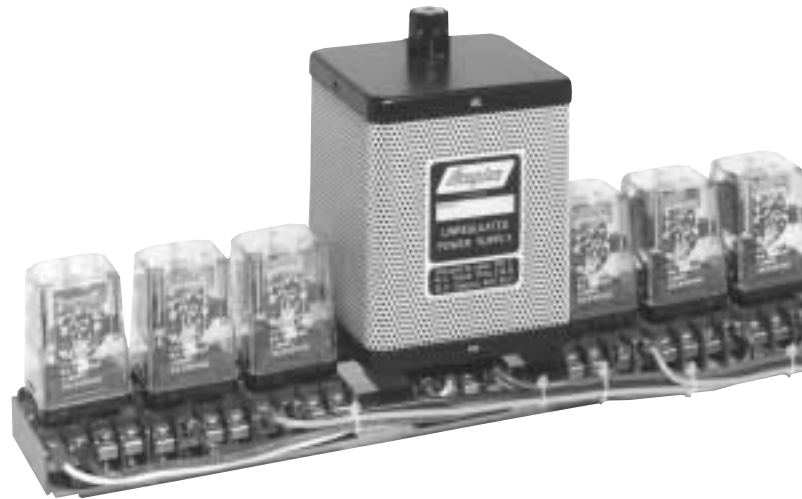

There is no need to use tiedown hardware unless it is mounted in other than an upright position, or where shock and vibration will be encountered.

STANDARD FEATURES

- Capacitive filtering
- Fused input
- May be used in series or parallel
- No derating or heat sinking required
- Completely serviceable

SPECIFICATIONS

Input Voltage: 0-125 VAC, 50-400 Hz, single phase.

Output Voltage Adjustment: Adjustable voltage models are provided with a built-in continuously adjustable autotransformer.

Load Regulation: The nominal output voltages of fixed output models, and the maximum rated output voltages for models with adjustable outputs, are based on 115 VAC input with approximately one-half load. At no load, they will increase by approximately 10%. At full load, they will be reduced by approximately 10%.


Line Regulation: Output voltage change due to line change directly proportional to input change.

Polarity: Output is floating; either positive or negative terminal may be grounded.

Ambient Operating Temperature: -10 to +65°C.
No derating required.

Storage Temperature: -55 to +85°C.

Installation: Plugs into standard 8-pin octal socket (see page 56). Four 6-32 mounting holes (on case sizes G and K) or four 10-32 mounting studs (on case sizes Q and P) are provided in the base for fastening the module when used in other than the upright position, or if extreme vibration will be encountered.

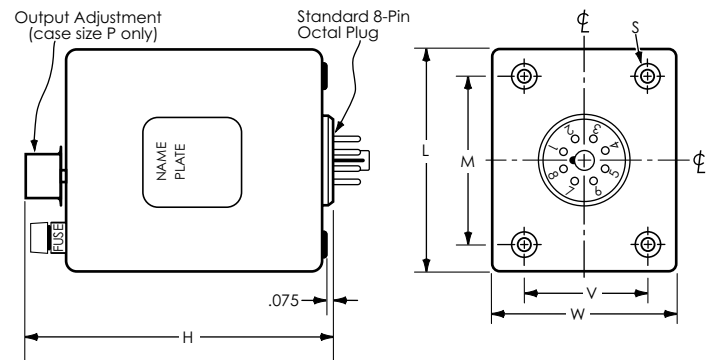

Case Size	L	W	H	M	V	S	Approx. Weight
G	3.40	3.28	5.12	2.625	2.625	Four 6-32 x .25" deep mounting holes	2 lb. 8 oz.
K	4.15	3.33	5.21	2.750	2.562	Four 6-32 x .25" deep mounting holes	4 lb. 4 oz.
Q	4.15	3.33	7.12	2.750	2.562	Four 10-32 x 9/16" long mounting studs	7 lb.
P	4.15	3.33	7.25	2.750	2.562	Four 10-32 x 9/16" long mounting studs	5 lb.



OPTIONS

230 Volt Input: Provision for inputs of 0-250 VAC, 50-400 Hz, replacing the standard of 0-125 VAC input voltage range, is available on single output models. Contact factory for information.



Plug-in UNREGULATED (continued)

single output & wide adjust output

SINGLE OUTPUT

Nominal Output Voltage	Output Current Amps.	Ripple Volts RMS	(\$) Price	Model	Case Size
7	1.0	.8	90	7U100	G
13	.600	.5	90	13U60	G
13	3.0	1.5	120	13U300	K
14	1.0	.7	90	14U100	G
16	1.0	.7	90	16U100	G
18	1.0	.7	90	18U100	G
20	3.0	2.3	120	20UP300	K
24	1.0	1.7	90	24U100	G
24	3.0	2.2	120	24UP300	K
28	1.0	1.7	90	28U100	G
28	3.0	2.7	120	28UP300	K
32	.400	.6	90	32U40	G
41	.400	.6	90	41U40	G
45	1.0	1.6	100	45UP100	G
48	.400	.6	95	48U40	G
50	1.0	1.6	100	50UP100	G
52	.400	.6	95	52U40	G
55	.250	.4	95	55U25	G
80	.300	1	100	80UP30	G
90	.300	2.2	105	90UP30	G
100	.200	1	105	100UP20	G
110	.200	1	105	110UP20	G
120	.200	1	105	120UP20	G
140	.200	2	105	140UP20	G
150	.200	2	105	150UP20	G
165	.200	2	105	165UP20	G
170	.200	2	110	170UP20	G
180	.200	2	110	180UP20	G
200	.200	2	110	200UP20	G
250	.200	4	110	250UP20	G
275	.100	3	105	275UP10	G
340	.100	3	105	340UP10	G
360	.100	3	105	360UP10	G
370	.100	3	105	370UP10	G
420	.100	6.7	105	420UP10	G
475	.020	3.1	100	475U02	G
580*	.020	3.1	100	580U02	G
750*	.020	3.1	105	750U02	G
900*	.020	5	110	900U02	G

*Not U.L. recognized when this catalog was published.

SINGLE OUTPUT - for relays

Nominal Output Voltage	Output Current Amps.	Output Voltage N/L-F/L	Ripple Volts RMS	(\$) Price	Model	Case Size
6	2.0	7.7 to 4.8	2.0	90	US6	G
6	5.0	7.6 to 5.0	2.5	120	UP6	K
12	1.5	14.9 to 10.9	2.5	90	US12	G
12	5.0	14.8 to 10.0	2.5	120	UP12	K
24	1.5	26.2 to 20.2	2.5	90	US24	G
24	3.5	26.0 to 21.0	2.0	120	UP24	K
24	5.0	26.6 to 20.0	3.2	125	U24	Q
28	1.0	30.6 to 25.5	2.0	95	US28	G
28	3.0	30.8 to 26.0	2.0	120	UP28	K
28	5.0	31.9 to 23.6	3.4	125	U28	Q
48	0.5	54.0 to 42.0	1.3	95	US48	G

WIDE ADJUST OUTPUT

Output Voltage Range	Output Current Amps.	Ripple Volts RMS	(\$) Price	Model	Case Size
0-14	1.0	1	215	14UA100	P
0-54	1.0	1.6	215	54UA100	P
0-95	.300	2.2	215	95UA30	P
0-125	.200	1.5	215	125UA20	P
0-220	.200	2	215	220UA20	P
0-260	.200	4	215	260UA20	P
0-370	.100	3	215	370UA10	P
0-450	.100	6.7	215	450UA10	P
0-500	.020	3.1	215	500UA02	P
0-800*	.020	3.1	215	800UA02	P
0-950*	.020	5	215	950UA02	P

*Not U.L. recognized when this catalog was published.

(See page 35 for other unregulated wide adjust output power supplies.)





Plug-in HIGH ISOLATION

LINEAR REGULATED
AC-DC
single output

- Shipped Within 3 Days
- All Models U.L. Recognized
- Five Year Warranty



For applications where high isolation in a regulated power supply is required, such as in powering strain gage and other transducer bridge circuits, Acopian offers 20 different models with ratings from 5 to 36 volts and 0.050 to 0.200 amperes. All models feature input-output isolation of 10,000 megohms minimum to ground.

To install, simply plug into a standard octal socket. There is no need to use tiedown hardware unless the module is mounted in other than an upright position, or where shock and vibration will be encountered.

SPECIFICATIONS

Isolation: 10,000 megohms to ground (min) in parallel with 100 pF (typical).

Leakage Current: 10 μ A (typical).

Input-Output Coupling: 50 pF (typical).

Input Voltage: 105-125 VAC, 50-60 Hz, single phase.

Load Regulation: \pm 0.05%

Line Regulation: \pm 0.05%

Polarity: Output floating; either positive or negative terminal may be grounded.

Temperature Coefficient: 0.02%/ $^{\circ}$ C (Typical).

Ambient Operating Temperature: -20 to +71 $^{\circ}$ C.
No derating required.

Storage Temperature: -55 to +85 $^{\circ}$ C.

Installation: Plugs into standard 8-pin octal socket (see page 56). Four mounting holes (6-32) are provided in the base for fastening the module when used in other than the upright position, or if extreme vibration will be encountered.

Case size: AS, (See page 50 for drawing).

Weight: 1 lb. 8 oz.

OPTIONS

Remote Output Adjustment: All standard models are provided with local voltage adjustment. For remote (external) adjustment, add prefix "E" to model number. Example: Model 15X20 will be E15X20. No increase in price.

Solder Terminals: All Acopian Plug-in power supplies are also available with solder terminals in place of an octal-type plug. To order, add suffix "L" to model number and \$30.00 to price. Example: Model 12X20 becomes Model 12X20L.

Nominal Output Voltage	Adjust Range \pm V	Output Current Amps.	Ripple μ V RMS	(\$) Price	Model
5	1	.200	350	170	5X20
6	1	.200	350	170	6X20
7	1	.200	350	170	7X20
8	1	.200	350	170	8X20
9	1	.200	350	170	9X20
10	1	.200	350	170	10X20
12	1	.200	350	170	12X20
15	1	.200	350	170	15X20
16	1	.200	350	170	16X20
18	1	.200	350	170	18X20
20	1	.200	350	170	20X20
22	1	.200	350	170	22X20
24	1	.200	350	170	24X20
25	2	.150	350	170	25X15
28	2	.150	350	170	28X15
30	2	.100	250	170	30X10
32	2	.100	250	170	32X10
34	2	.100	250	170	34X10
35	1	.050	200	170	35X05
36	1	.050	200	170	36X05

Overvoltage Protection: An internal preset overvoltage protector is available. To order, add prefix "V" to the model number, and increase standard price by \$25.00.



ORDERING INFORMATION & Terms and Conditions

ACOPIAN SELLS FACTORY DIRECT WORLDWIDE: We do not use representatives or distributors. Contact Acopian for technical information or a quote.

WARRANTY: Acopian power supplies are warranted to be free from defects in material and workmanship for a period of five years (encapsulated devices and fans, for one year) from date of original shipment. Acopian's obligation under this warranty is limited to repairing any power supply returned to the factory Service Department in Easton, PA and replacing any defective parts. Mini Encapsulated power supplies are not repairable. Authorization must be obtained from Acopian before a power supply may be returned for repair. Units must be well packed when shipping to Acopian; the repair of any damage incurred during shipment will be charged. Transportation charges are to be paid by the purchaser. A reinspection and handling charge will be applied to returned units found to have no defects. If a failure has been caused by misuse, operation in excess of specifications, or modification by the customer, repairs will be billed at cost; in such cases, a cost estimate will be submitted before work is started.

Acopian reserves the right to make changes or improvements in its products without incurring any obligation to install the same on products previously manufactured.

This warranty is in lieu of all other warranties, obligations, and liabilities, expressed or implied, and is the purchaser's exclusive remedy. Acopian makes no warranty, either express or implied, of merchantability, fitness for a particular purpose or otherwise. In no event shall Acopian be liable whether in contract, tort, or negligence, for special, indirect, incidental or consequential damages of any kind, including loss of business or profits, or any other losses incurred by the purchaser or any third party, the Customer's remedies being limited, at Acopian's option, to replacement, repair or credit at the price on the date of claim.

The validity, performance and construction of all terms and conditions and any sale made by Acopian shall be determined by the law of Pennsylvania, without regard to its conflict of law principles, and all parties to the transaction expressly consent to the jurisdiction of such courts and consent to the venue of the Court of Common Pleas for Northampton County, Pennsylvania.

PRICES: The prices shown are F.O.B. our factory; Easton, PA. or Melbourne, FL.. All prices and specifications are subject to change without notice. Minimum order is \$50.00.

TERMS: Net 30 days, subject to credit approval. Visa and MasterCard also accepted.

SHIPPING: Location permitting, small shipments are made by United Parcel Service, or by Parcel Post; larger shipments, by insured motor freight collect. Shipments can be made by air upon request. Risk of loss shall be F.O.B. Our Factory, even in cases where freight may be prepaid or allowed to destination by Acopian. If equipment is received in damaged condition, it is the customer's responsibility to contact the carrier and file a claim for damages.

TIME FOR DELIVERY: The time for delivery quoted by Acopian is the time required to ship from our plants. We will not be liable for delays in delivery caused by any reason beyond our control, including but not limited to acts of God, casualty, civil disturbance, labor disputes, transportation or supply difficulties, or any interruption of our facilities, and the quoted time for delivery shall be extended during the continuance of such conditions and for a reasonable time thereafter. In no event will Acopian be liable for any premium transportation, procurement, or similar costs incurred by the Customer as a result of conditions beyond Acopian's control resulting in Acopian's inability to deliver product in accordance with customer's requested delivery schedules.

QUANTITY DISCOUNTS: Discounts are available to quantity buyers and are dependent upon the order quantity and the manufacturing scheduling anticipated by the order, and apply only to the quantity and delivery ordered. Partial shipments are considered as separate orders for discounting purposes.

EXPORT ORDERS: A minimum export handling charge of \$60.00 applies. (A minimum charge of \$25.00 applies on orders requiring customs forms for Canadian orders and for orders to certain U.S. territories.)

MOISTURE/FUNGUS PROOFING: Power supplies can be furnished with a moisture and fungus resistant varnish applied to interior surfaces. To order, add the suffix letter F to the model number. The additional cost is \$25.00 per output and requires two additional days. Not available on High Voltage, Switching, Mini Encapsulated and Rack Mounting models.

TAGGING: Maximum of 15 characters/spaces. Add \$10.00 to price.

TEST DATA: Cost, \$35.00 or 2% of order, whichever is greater.

SPECIAL MODELS/MODIFICATIONS: Cataloged models can be altered at the factory to meet special requirements. Contact the Applications Engineering Department to discuss your needs.

PARTS: The designs used in Acopian power supplies utilize standard components to the greatest practical extent. When replacements are required, the types originally used, or their equivalents, can usually be obtained most quickly from a local electronic components distributor.

Special components, such as transformers, are stocked at the factory warehouses. Contact the Applications Engineering Department for information on the parts required, referencing the model number of the power supply, the circuit designation of the component, and a description.

PURCHASE ORDER ACCEPTANCE: Orders are accepted subject to Acopian's Terms and Conditions. Any Terms and Conditions of any Purchaser's order, agreement, or understanding which are in addition to or inconsistent with Acopian's shall not be binding upon Acopian unless made in writing and accepted over the signature of an authorized officer of Acopian. Orders shall not be considered accepted until entered into production at our plant. Acopian reserves the right to refuse any order. All typographical and clerical errors are subject to correction by Acopian.

RETURNED GOODS: Acopian products are built on a per-order basis, and ordinarily no credit can be extended for their return. No goods will be accepted for return unless authorized in writing by Acopian.

CHANGES: The customer may, by a written notice, request changes within the general scope of the order, in the drawings, designs or specifications; method of shipment; and place of delivery. If any such change causes an increase or decrease in the cost, or the time required for the processing of any part of the order, an equitable adjustment shall be made in the price or delivery schedule, or both, and the order shall be modified in writing accordingly.

CANCELLATION: Suspension or cancellation of orders may be made only upon our written approval and on terms that will indemnify us against all loss.


OVERTIME: It is anticipated that any order will be processed during regular working hours on regular working days. If for any reason the Purchaser requests Acopian to process the order, or any portion of it, outside of such regular working hours, any overtime or other additional expense occasioned thereby shall be billed to and paid by the Purchaser as an extra cost. Acopian reserves the right to decline to process the order outside regular working hours.

CUSTOMER DELAY OF WORK: If the performance of all or any part of the work is delayed or interrupted by Customer's failure to act within the time specified (or within a reasonable time if no time is specified) and such act is not expressed or implied by the order, an adjustment shall be made in the cost of performance of the order caused by such delay or interruption and the order modified in writing accordingly. Adjustment will also be made in the delivery or performance dates and any other contractual provisions affected by such delay or interruption.

GOVERNMENT SPECIFICATIONS: Pricing is based upon industrial-grade construction, marking, packing, and packaging. Exception is taken to any MIL specifications, and to any requirements for the use of special forms, documentation other than quoted, and Government Source Inspection. Acopian must decline to quote on any other basis.

APPLICATIONS ASSISTANCE: *Questions regarding the specifications, features, and use of any Acopian product should be directed to the Applications Engineering Department. A staff of power supply specialists will be pleased to assist you.*

At www.acopian.com you will find: This complete catalog in an easy-to-use format • CAD drawings • Instruction sheets



Since 1957

Acopian Technical Company
P.O. Box 638, Easton, PA 18044 • Phone: (610) 258-5441 • FAX: (610) 258-2842
Call toll free: (800) 523-9478 (International: Country Code 01)

ACOPIAN PROMISES TO SHIP WITHIN THREE DAYS

. . . and we keep that promise. For more than 40 years, Acopian has been shipping AC to DC power modules within three days after receipt of an order. During this period, the Acopian line has expanded from the original Plug-in modules to a broad range of different types of power supplies.

Our unique 3-day shipping guarantee has prompted many questions. Below are some of those most often asked:

What does Acopian's 3-day shipping promise mean?

It means that power modules listed in this catalog are shipped within 3 days after we receive your order. Switching, High Voltage, Redundant and Rack Mounting power supplies and Systems are shipped within 9 days.

Has Acopian ever failed to meet this promise?

Never.

Do options affect shipping time?

The 230 volt input option and moisture/fungus-proofing option require two additional days. All other options do not affect shipping time.

Is the 3-day promise affected by quantity? Suppose we need 50 or 100 pieces?

The 3-day promise applies to orders for five or less modules. (Two or less for 9-day items). If requested, Acopian will ship five pieces of a larger order in 3 days and, with consideration of your requirement, schedule the balance. (Since each shipment is processed and priced as a separate order, for lowest prices request shipment in one lot.)

What if I need four or five different models? Does the 3-day promise still apply?

Yes. Guaranteed 3-day shipment applies to one model or to a combination of models.

Do I have to ask for 3-day shipment of my order?

3-day shipment is automatic. In fact, you must tell us if you want the shipment delayed.

It takes me so long to get a requisition processed and approved that your 3-day shipment may not help me much. Do you have a solution to this problem?

Verbal orders are acceptable. We suggest you ask your purchasing people to call in the order. All we require is the purchase order number and shipping information.

How long after you ship will I have the power supplies?

Transportation time varies with the carrier used. Unless otherwise specified, Acopian ships small orders by UPS Surface, which is usually delivered in one or two days locally and in about a week coast-to-coast. Many carriers guarantee next-day delivery, at additional cost. Your Purchasing Department may prefer that a certain carrier be used.

You say Acopian has never failed to meet the 3-day promise. How do you do it?

Our facilities have been designed and equipped to meet our 3-day shipment promise. When your order is received, your power supplies are built specifically for you and shipped within three days. We do not ship from stock. (For this reason we are unable to accept returns for credit.)

I've seen other power supply manufacturers advertise "stock delivery". Why should I consider 3-day shipment a significant benefit?

Because a "delivery-from-stock" promise is not precise, and may be misleading. What if the power module you require is out of stock when your order reaches a typical vendor? A four to six week delay is not unusual before inventory is replenished and your order is shipped. Consider how this possibility is compounded when you need four or five different modules. In other words, fulfillment of a "ship-from-stock" promise is dependent on a variable - the quantity in stock when your order is placed. Acopian's 3-day shipment promise is unconditional.

If you have other questions, please call or write to Vice-President, Marketing. You will receive a prompt and straightforward reply.

At www.acopian.com you will find:

- plus...
- This complete catalog in an easy-to-use format.
 - Single Output power supply "Quick Find" by DC output voltage.
 - CAD drawings.
 - Instruction sheets.
-

**ALL ACOPIAN
POWER SUPPLIES
MADE IN U.S.A.**



Since 1957

Acopian Technical Company

P.O. Box 638, Easton, PA 18044 • Phone: (610) 258-5441 • FAX: (610) 258-2842

Call toll free: (800) 523-9478 (International: Country Code 01)

