


Preliminary Data Sheet
Bipolar Power Transistors
PNP Silicon


- Collector–Emitter Sustaining Voltage — $V_{CE(sus)}$
= 30 Vdc (Min) @ $I_C = 10$ mAdc
- High DC Current Gain — h_{FE}
= 140 (Min) @ $I_C = 1.2$ Adc
= 125 (Min) @ $I_C = 3.0$ Adc
- Low Collector–Emitter Saturation Voltage — $V_{CE(sat)}$
= 0.275 Vdc (Max) @ $I_C = 1.2$ Adc
= 0.68 Vdc (Max) @ $I_C = 5.0$ Adc
- SOT–223 Surface Mount Packaging




MMJT9435

Motorola Preferred Device

POWER BJT
 $I_C = 3.0$ AMPERES
 $V_{CE0} = 30$ VOLTS
 $V_{CE(sat)} = 0.275$ VOLTS



CASE 318E–04, Style 1



MAXIMUM RATINGS ($T_C = 25^\circ\text{C}$ unless otherwise noted)

Rating	Symbol	Value	Unit
Collector–Emitter Voltage	V_{CEO}	30	Vdc
Collector–Base Voltage	V_{CB}	45	Vdc
Emitter–Base Voltage	V_{EB}	± 8.0	Vdc
Base Current — Continuous	I_B	1.0	Adc
Collector Current — Continuous — Peak	I_C	3.0 5.0	Adc
Total Power Dissipation @ $T_C = 25^\circ\text{C}$ Derate above 25°C	P_D	3.0 0.025	Watts mW/ $^\circ\text{C}$
Total P_D @ $T_A = 25^\circ\text{C}$ mounted on 1" sq. (645 sq. mm) Drain pad on FR–4 bd material		2.0	Watts
Total P_D @ $T_A = 25^\circ\text{C}$ mounted on 0.92" sq. (590 sq. mm) Drain pad on FR–4 bd material		1.5	
Total P_D @ $T_A = 25^\circ\text{C}$ mounted on 0.012" sq. (7.6 sq. mm) Drain pad on FR–4 bd material		0.8	
Operating and Storage Junction Temperature Range	T_J, T_{stg}	–55 to +150	$^\circ\text{C}$

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance – Junction to Case	$R_{\theta JC}$	40	$^\circ\text{C/W}$
– Junction to Ambient on 1" sq. (645 sq. mm) Drain pad on FR–4 bd material	$R_{\theta JA}$	60	
– Junction to Ambient on 0.92" sq. (590 sq. mm) Drain pad on FR–4 bd material	$R_{\theta JA}$	85	
– Junction to Ambient on 0.012" sq. (7.6 sq. mm) Drain pad on FR–4 bd material	$R_{\theta JA}$	156	
Maximum Lead Temperature for Soldering Purposes, 1/8" from case for 5 seconds	T_L	260	$^\circ\text{C}$

This document contains information on a new product. Specifications and information are subject to change without notice.

Preferred devices are Motorola recommended choices for future use and best overall value.

MMJT9435**ELECTRICAL CHARACTERISTICS** ($T_C = 25^\circ\text{C}$ unless otherwise noted)

Characteristic	Symbol	Min	Typ	Max	Unit
OFF CHARACTERISTICS					
Collector–Emitter Sustaining Voltage ($I_C = 10\text{ mAdc}$, $I_B = 0\text{ Adc}$)	$V_{CE(sus)}$	30	—	—	Vdc
Collector Cutoff Current ($V_{CE} = 25\text{ Vdc}$, $R_{BE} = 200\ \Omega$)	I_{CER}	—	—	20	μAdc
Emitter Cutoff Current ($V_{BE} = 5.0\text{ Vdc}$)	I_{EBO}	—	—	10	μAdc

ON CHARACTERISTICS(1)

Collector–Emitter Saturation Voltage ($I_C = 0.8\text{ Adc}$, $I_B = 20\text{ mAdc}$) ($I_C = 1.2\text{ Adc}$, $I_B = 20\text{ mAdc}$) ($I_C = 5.0\text{ Adc}$, $I_B = 1.0\text{ Adc}$)	$V_{CE(sat)}$	— — —	0.140 — —	0.210 0.275 0.680	Vdc
Base–Emitter Saturation Voltage ($I_C = 5.0\text{ Adc}$, $I_B = 1.0\text{ Adc}$)	$V_{BE(sat)}$	—	—	1.40	Vdc
Base–Emitter On Voltage ($I_C = 3.0\text{ Adc}$, $V_{CE} = 4.0\text{ Vdc}$)	$V_{BE(on)}$	—	—	1.10	Vdc
DC Current Gain ($I_C = 1.2\text{ Adc}$, $V_{CE} = 4.0\text{ Vdc}$) ($I_C = 3.0\text{ Adc}$, $V_{CE} = 4.0\text{ Vdc}$)	h_{FE}	140 125	— 170	— —	—

DYNAMIC CHARACTERISTICS

Output Capacitance ($V_{CB} = 10\text{ Vdc}$, $I_E = 0\text{ Adc}$, $f = 1.0\text{ MHz}$)	C_{ob}	—	100	—	pF
Input Capacitance ($V_{EB} = 8.0\text{ Vdc}$)	C_{ib}	—	135	—	pF
Current–Gain — Bandwidth Product(2) ($I_C = 500\text{ mA}$, $V_{CE} = 10\text{ V}$, $f_{test} = 1.0\text{ MHz}$)	f_T	—	105	—	MHz

(1) Pulse Test: Pulse Width $\leq 300\ \mu\text{s}$, Duty Cycle $\leq 2\%$.(2) $f_T = |h_{FE}| \cdot f_{test}$

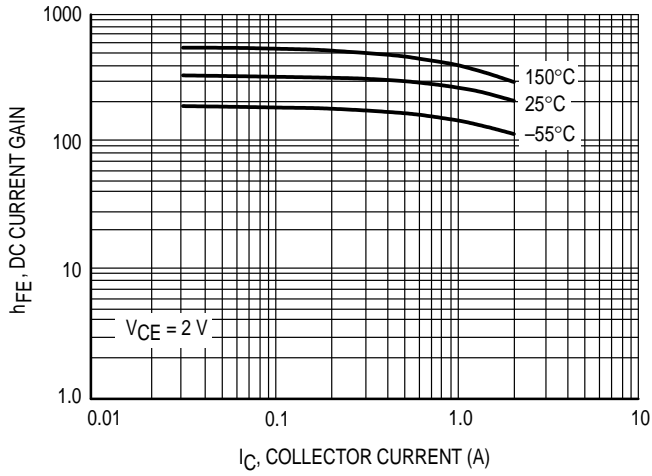


Figure 1. DC Current Gain

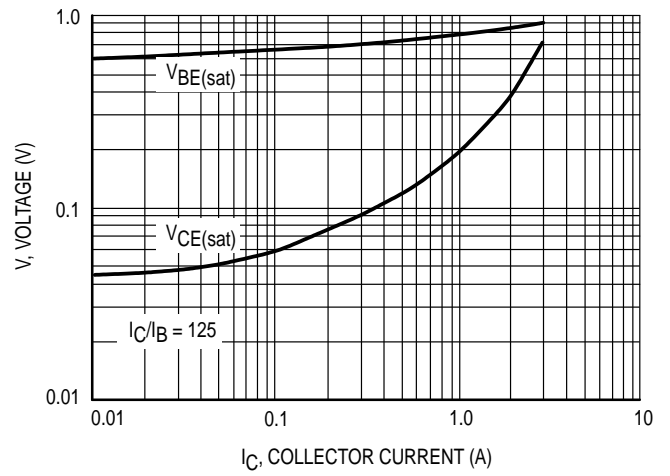


Figure 2. "ON" Voltages

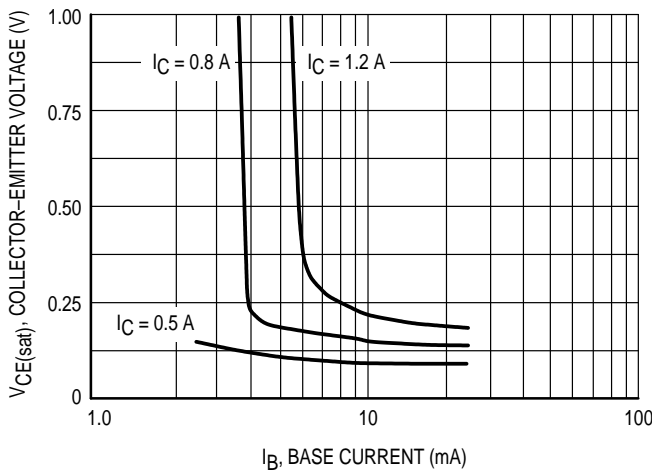


Figure 3. Collector Saturation Region


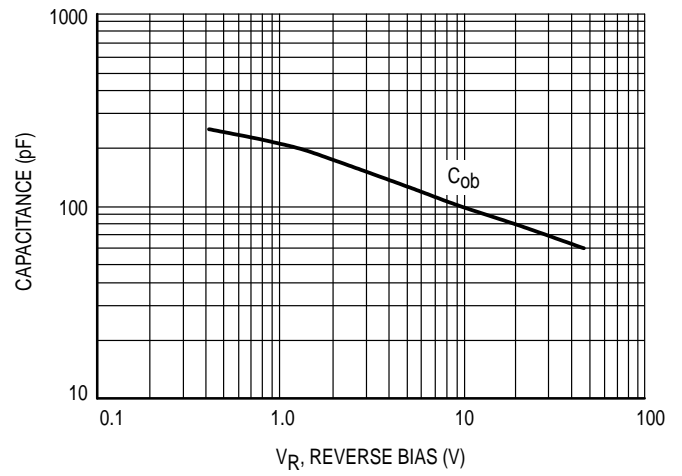


Figure 4. Capacitance

PACKAGE DIMENSIONS

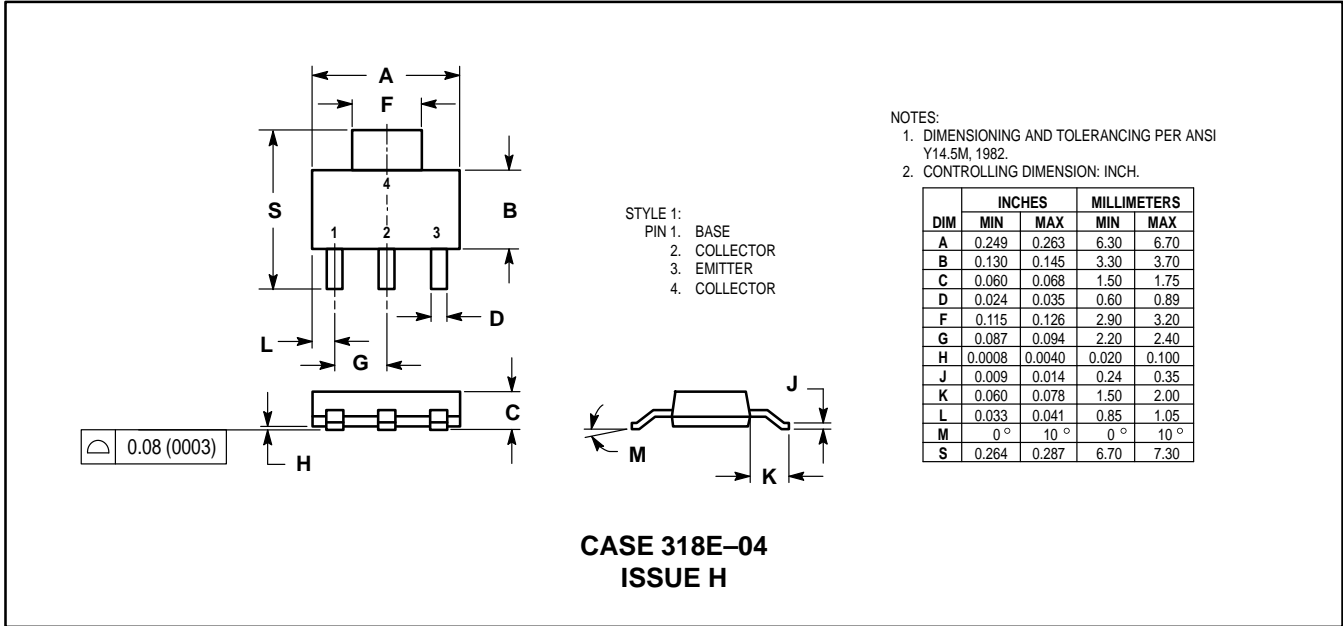

Motorola reserves the right to make changes without further notice to any products herein. Motorola makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Motorola assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. "Typical" parameters which may be provided in Motorola data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. Motorola does not convey any license under its patent rights nor the rights of others. Motorola products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the Motorola product could create a situation where personal injury or death may occur. Should Buyer purchase or use Motorola products for any such unintended or unauthorized application, Buyer shall indemnify and hold Motorola and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Motorola was negligent regarding the design or manufacture of the part. Motorola and are registered trademarks of Motorola, Inc. Motorola, Inc. is an Equal Opportunity/Affirmative Action Employer.

Mfax is a trademark of Motorola, Inc.

How to reach us:

USA/EUROPE/Locations Not Listed: Motorola Literature Distribution;
 P.O. Box 5405, Denver, Colorado 80217. 303-675-2140 or 1-800-441-2447

JAPAN: Nippon Motorola Ltd.; Tatsumi-SPD-JLDC, 6F Seibu-Butsuryu-Center,
 3-14-2 Tatsumi Koto-Ku, Tokyo 135, Japan. 81-3-3521-8315

Mfax™: RMFAX0@email.sps.mot.com – TOUCHTONE 602-244-6609
 – US & Canada ONLY 1-800-774-1848

ASIA/PACIFIC: Motorola Semiconductors H.K. Ltd.; 8B Tai Ping Industrial Park,
 51 Ting Kok Road, Tai Po, N.T., Hong Kong. 852-26629298

INTERNET: <http://www.mot.com/SPS/>

