

VARIABLE CAPACITANCE DIODE

FEATURES

- Very Low Series Resistance
- Excellent Linearity (CV Curve) with Very Wide Operating Range
- Large Capacitance Ratio (A = 2.57 minimum)
- Two Diodes in a Miniature Package (SOT23-3)
- Very Small Capacitance Deviation at Tape/Reel

APPLICATIONS

- FM Radio
- Voltage Controlled Oscillator
- Stereo Tuner

DESCRIPTION

The KV1420 is a high withstanding voltage variable capacitance diode specially designed for high grade stereo tuners. Superior linearity characteristics and a high start-up voltage (7 V) provide for strong input characteristics which make it highly suited to provide a strong front end in mimimizing cross modulation.


The KV1420 is available in a miniature SOT23-3 package.

CLASSIFICATION

(Unit: pF)


C		RANK						
		1	2	3	4	5	6	7
C ₇	MIN	44.81	43.93	43.07	42.23	41.40	40.59	39.79
	MAX	46.16	45.26	44.37	43.50	42.64	41.81	40.99

ORDERING INFORMATION

KV1420 
 Tape/Reel Code

TAPE/REEL CODE
 TL: Tape Left

KV1420



KV1420

ABSOLUTE MAXIMUM RATINGS

Reverse Voltage	30 V	Storage Temperature Range	-55 to +150 °C
Forward Current	50 mA	Operating Temperature Range	-55 to +85 °C
Power Dissipation	100 mW	Lead Soldering Temperature (10 s)	235 °C

ELECTRICAL CHARACTERISTICS







Test conditions: $T_A = 25\text{ °C}$

SYMBOL	PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNITS
V_{REV}	Reverse Voltage	$I_{REV} = 10\ \mu\text{A}$	30			V
I_{REV}	Reverse Current	$V_{REV} = 25.0\ \text{V}$			100	nA
C ₇	Diode Capacitance 7	$V_{REV} = 7.0\ \text{V}, f = 1\ \text{MHz}$	39.79		46.16	pF
C ₁₃	Diode Capacitance 13	$V_{REV} = 13.0\ \text{V}, f = 1\ \text{MHz}$	24.25		28.70	pF
C ₁₉	Diode Capacitance 19	$V_{REV} = 19.0\ \text{V}, f = 1\ \text{MHz}$	17.32		20.50	pF
C ₂₅	Diode Capacitance 25	$V_{REV} = 25.0\ \text{V}, f = 1\ \text{MHz}$	13.93		16.49	pF
R _s	Series Resistance	$V_{REV} = 7.0\ \text{V}, f = 70\ \text{MHz}$			0.5	Ω
A	Capacitance Ratio	C_7 / C_{25}	2.57	2.80	3.03	


Note 1: Diode Capacitance measured with HP 4279A or equivalent instruments (at OSC level 20 mVrms, $\pm 5\ \text{mVrms}$).

Note 2: Series Resistance measured with HP 4191A or equivalent instruments.

TYPICAL PERFORMANCE CHARACTERISTICS

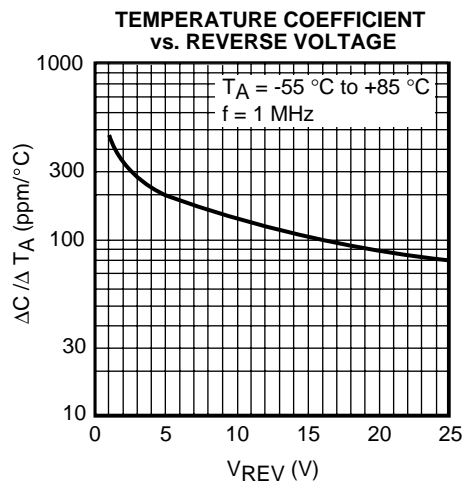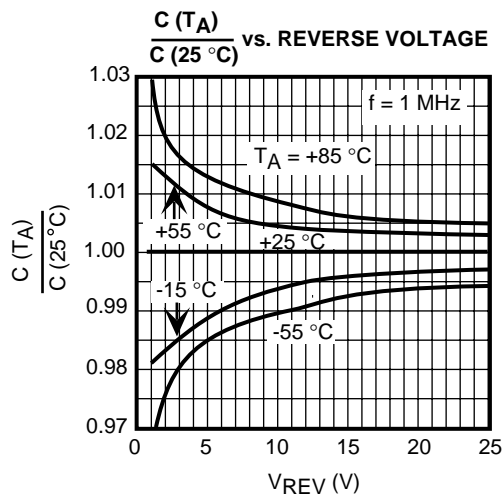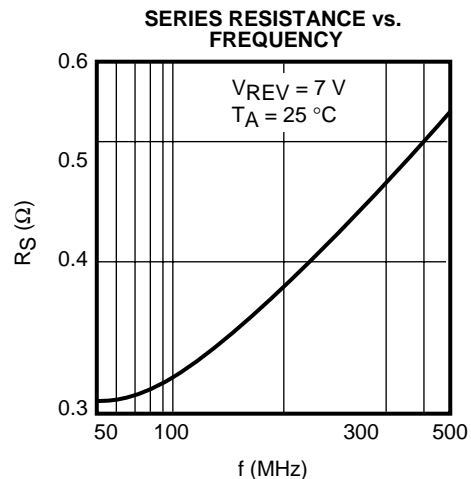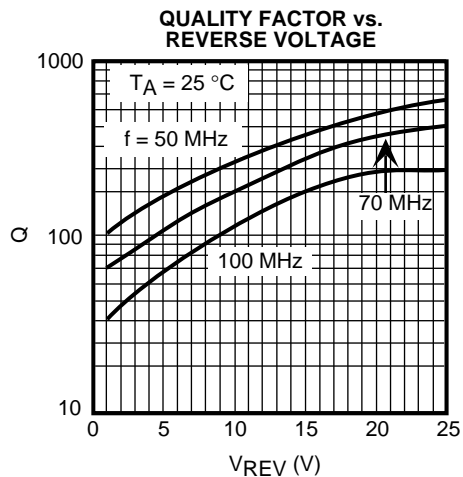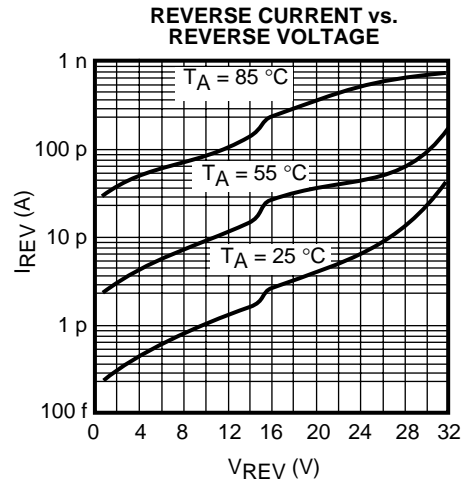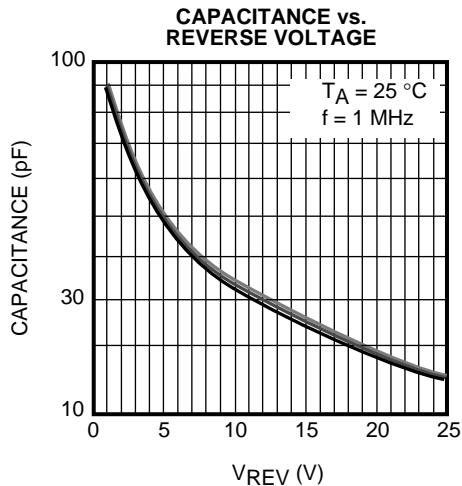

PACKAGE OUTLINE

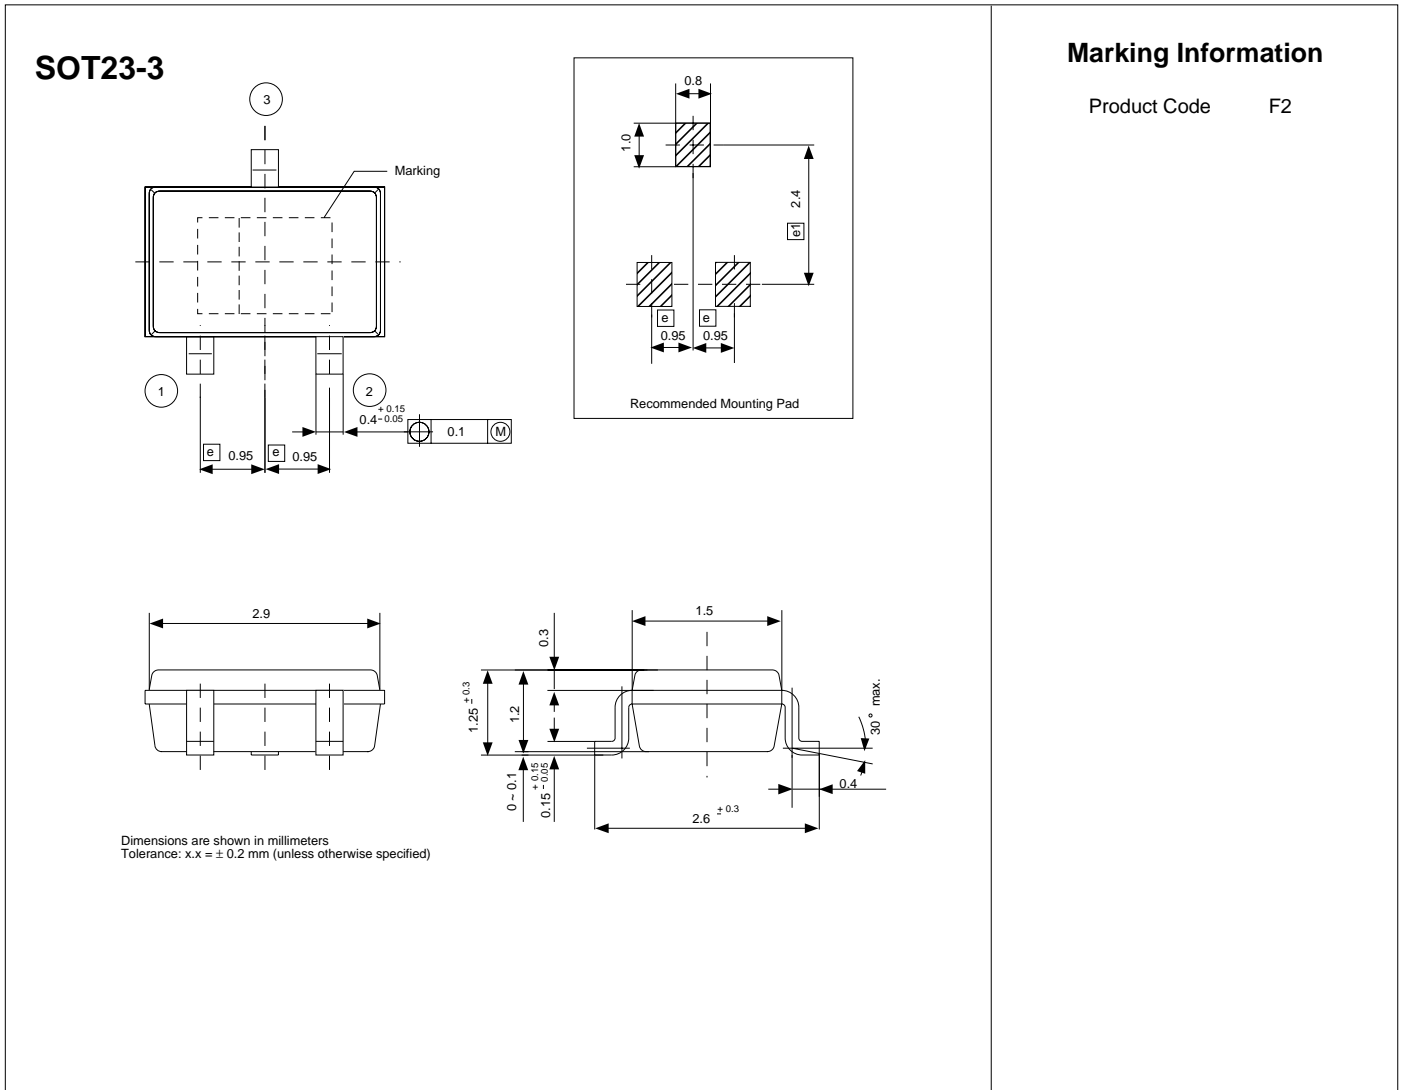

Toko America, Inc. Headquarters
1250 Feehanville Drive, Mount Prospect, Illinois 60056
Tel: (847) 297-0070 Fax: (847) 699-7864

TOKO AMERICA REGIONAL OFFICES

Midwest Regional Office
Toko America, Inc.
1250 Feehanville Drive
Mount Prospect, IL 60056
Tel: (847) 297-0070
Fax: (847) 699-7864

Western Regional Office
Toko America, Inc.
2480 North First Street, Suite 260
San Jose, CA 95131
Tel: (408) 432-8281
Fax: (408) 943-9790

Eastern Regional Office
Toko America, Inc.
107 Mill Plain Road
Danbury, CT 06811
Tel: (203) 748-6871
Fax: (203) 797-1223

Semiconductor Technical Support
Toko Design Center
4755 Forge Road
Colorado Springs, CO 80907
Tel: (719) 528-2200
Fax: (719) 528-2375

Visit our Internet site at <http://www.tokoam.com>

The information furnished by TOKO, Inc. is believed to be accurate and reliable. However, TOKO reserves the right to make changes or improvements in the design, specification or manufacture of its products without further notice. TOKO does not assume any liability arising from the application or use of any product or circuit described herein, nor for any infringements of patents or other rights of third parties which may result from the use of its products. No license is granted by implication or otherwise under any patent or patent rights of TOKO, Inc.