

# SHINDENGEN

## Switching Power Transistor


FX Series

**2SC4582**  
**(TP15W45FX)****15A NPN**

### OUTLINE DIMENSIONS

Case : ITO-3P

Unit : mm

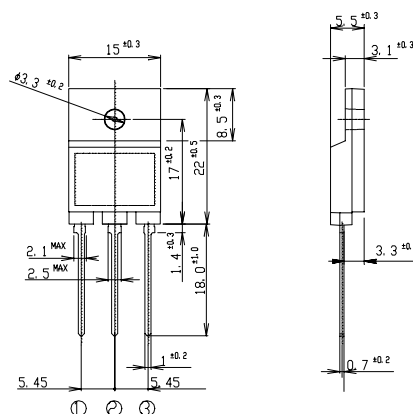

⊙: B  
 ⊖: C  
 ⊕: E

### RATINGS


#### ● Absolute Maximum Ratings

Item	Symbol	Conditions	Ratings	Unit
Storage Temperature	T <sub>stg</sub>		-55~150	°C
Junction Temperature	T <sub>j</sub>		150	°C
Collector to Base Voltage	V <sub>CBO</sub>		600	V
Collector to Emitter Voltage	V <sub>CEO</sub>		450	V
	V <sub>CEX</sub>	V <sub>EB</sub> = 5V	600	
Emitter to Base Voltage	V <sub>EBO</sub>		7	V
Collector Current DC	I <sub>C</sub>		15	A
Collector Current Peak	I <sub>CP</sub>		30	
Base Current DC	I <sub>B</sub>		6	A
Base Current Peak	I <sub>BP</sub>		12	
Total Transistor Dissipation	P <sub>T</sub>	T <sub>c</sub> = 25°C	75	W
Dielectric Strength	V <sub>dis</sub>	Terminals to case, AC 1 minute	2	kV
Mounting Torque	TOR		0.8	N·m


#### ● Electrical Characteristics (T<sub>c</sub>=25°C)

Item	Symbol	Conditions	Ratings	Unit
Collector to Emitter Sustaining Voltage	V <sub>CEO(sus)</sub>	I <sub>C</sub> = 0.2A	Min 450	V
Collector Cutoff Current	I <sub>CBO</sub>	At rated Voltage	Max 0.1	mA
	I <sub>CEO</sub>		Max 0.1	
Emitter Cutoff Current	I <sub>EBO</sub>	At rated Voltage	Max 0.1	mA
DC Current Gain	h <sub>FE</sub>	V <sub>CE</sub> = 5V, I <sub>C</sub> = 7.5A	Min 10	
	h <sub>FEL</sub>	V <sub>CE</sub> = 5V, I <sub>C</sub> = 1mA	Min 5	
Collector to Emitter Saturation Voltage	V <sub>CE(sat)</sub>	I <sub>C</sub> = 7.5A	Max 1.0	V
Base to Emitter Saturation Voltage	V <sub>BE(sat)</sub>	I <sub>B</sub> = 1.5A	Max 1.5	V
Thermal Resistance	θ <sub>jc</sub>	Junction to case	Max 1.67	°C/W
Transition Frequency	f <sub>T</sub>	V <sub>CE</sub> = 10V, I <sub>C</sub> = 1.5A	STD 20	MHz
Turn on Time	t <sub>on</sub>	I <sub>C</sub> = 7.5A	Max 0.5	μs
Storage Time	t <sub>s</sub>	I <sub>B1</sub> = 1.5A, I <sub>B2</sub> = 3A	Max 2.0	
Fall Time	t <sub>f</sub>	R <sub>L</sub> = 20 Ω, V <sub>BB2</sub> = 4V	Max 0.2	


# 2SC4582 $h_{FE} - I_C$

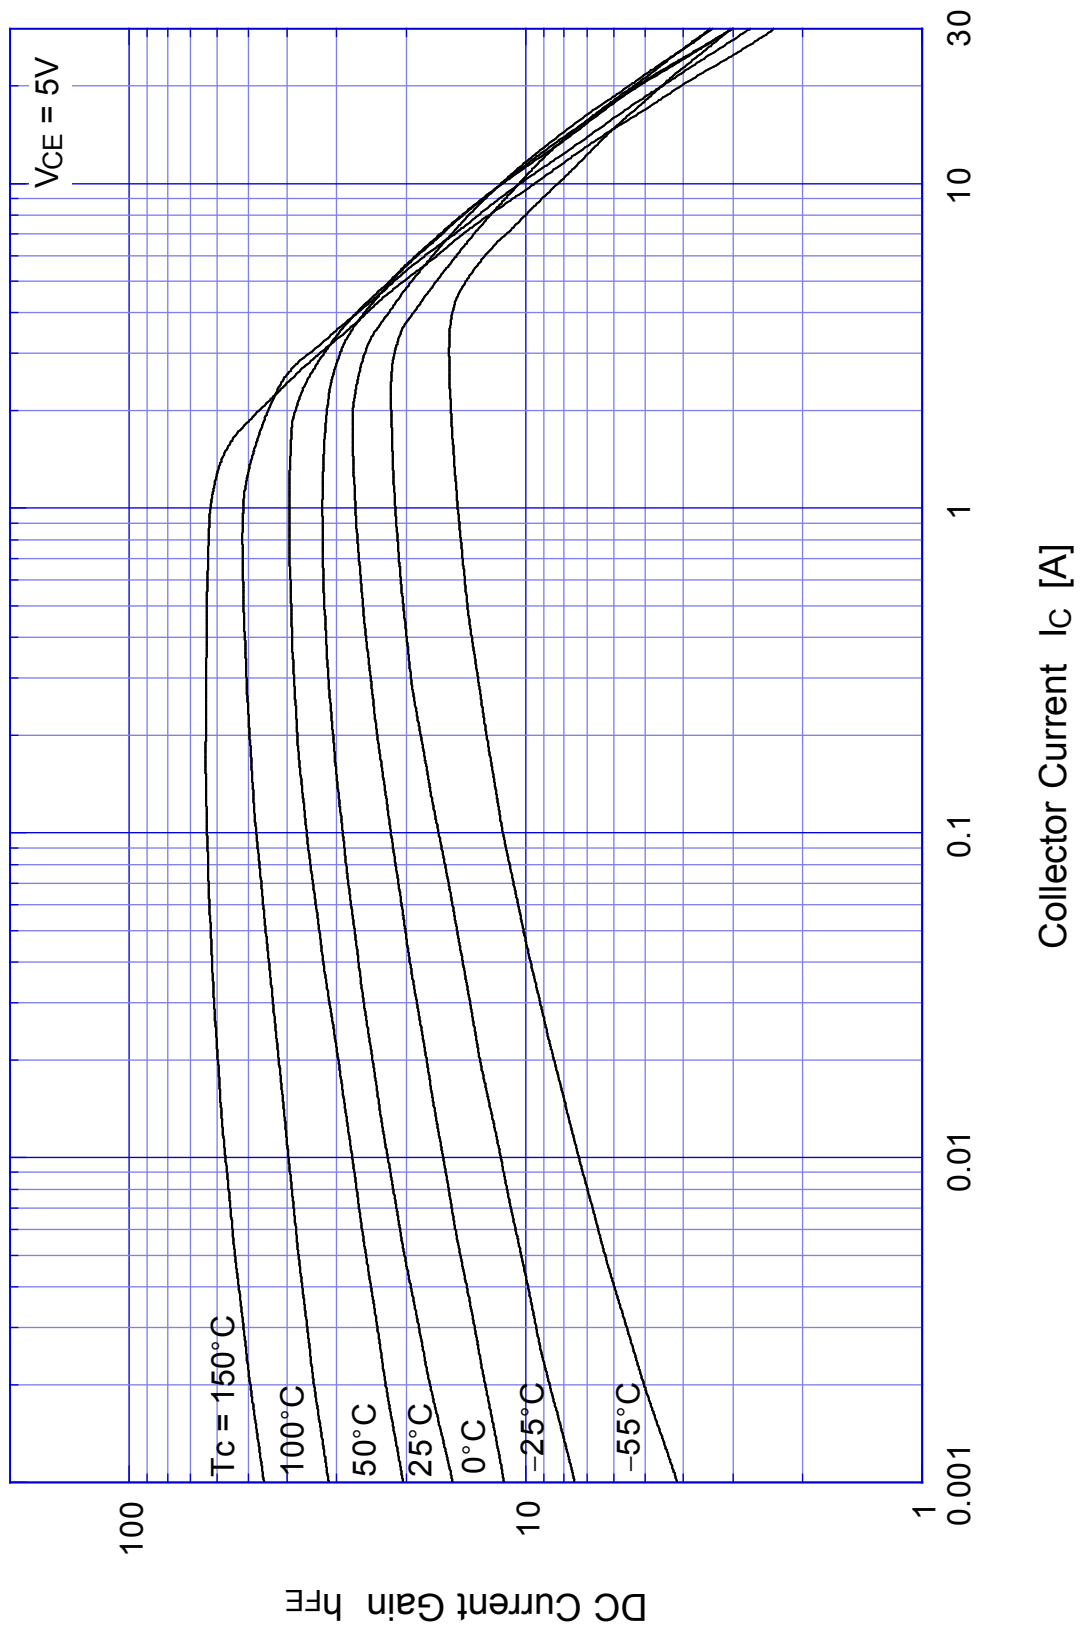


## 2SC4582 Saturation Voltage

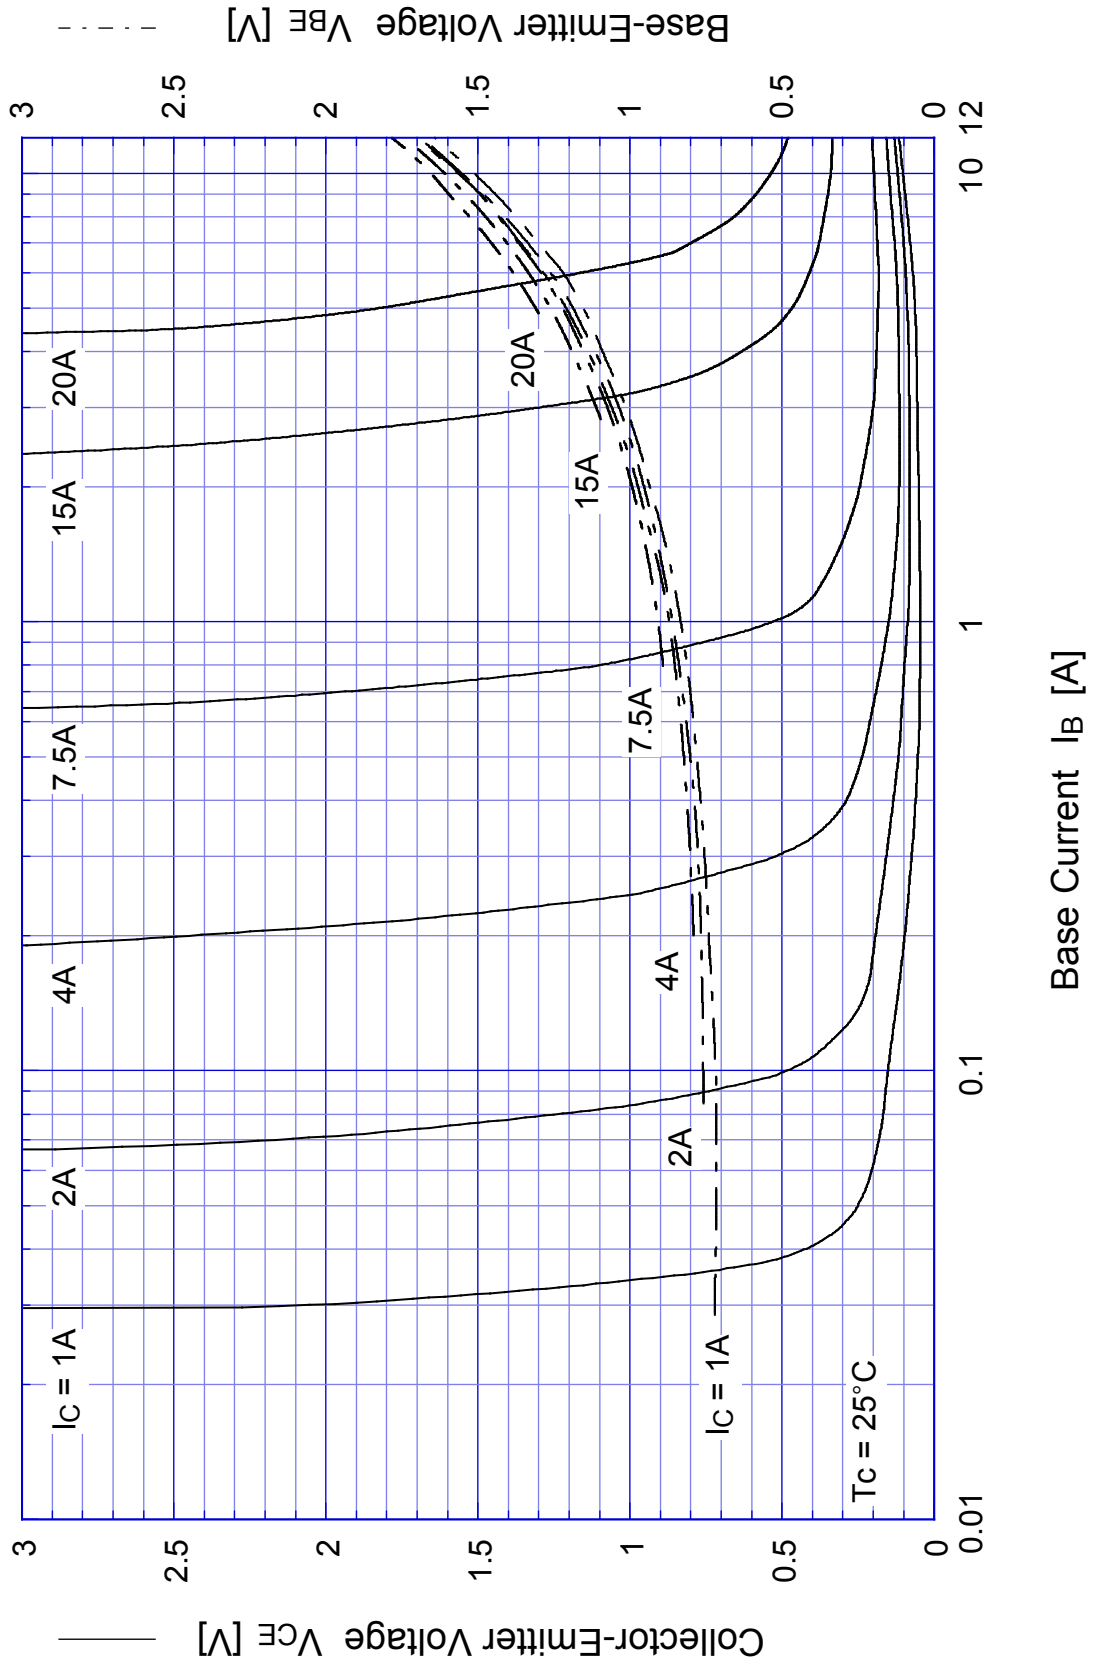


## 2SC4582 Switching Time - $I_C$

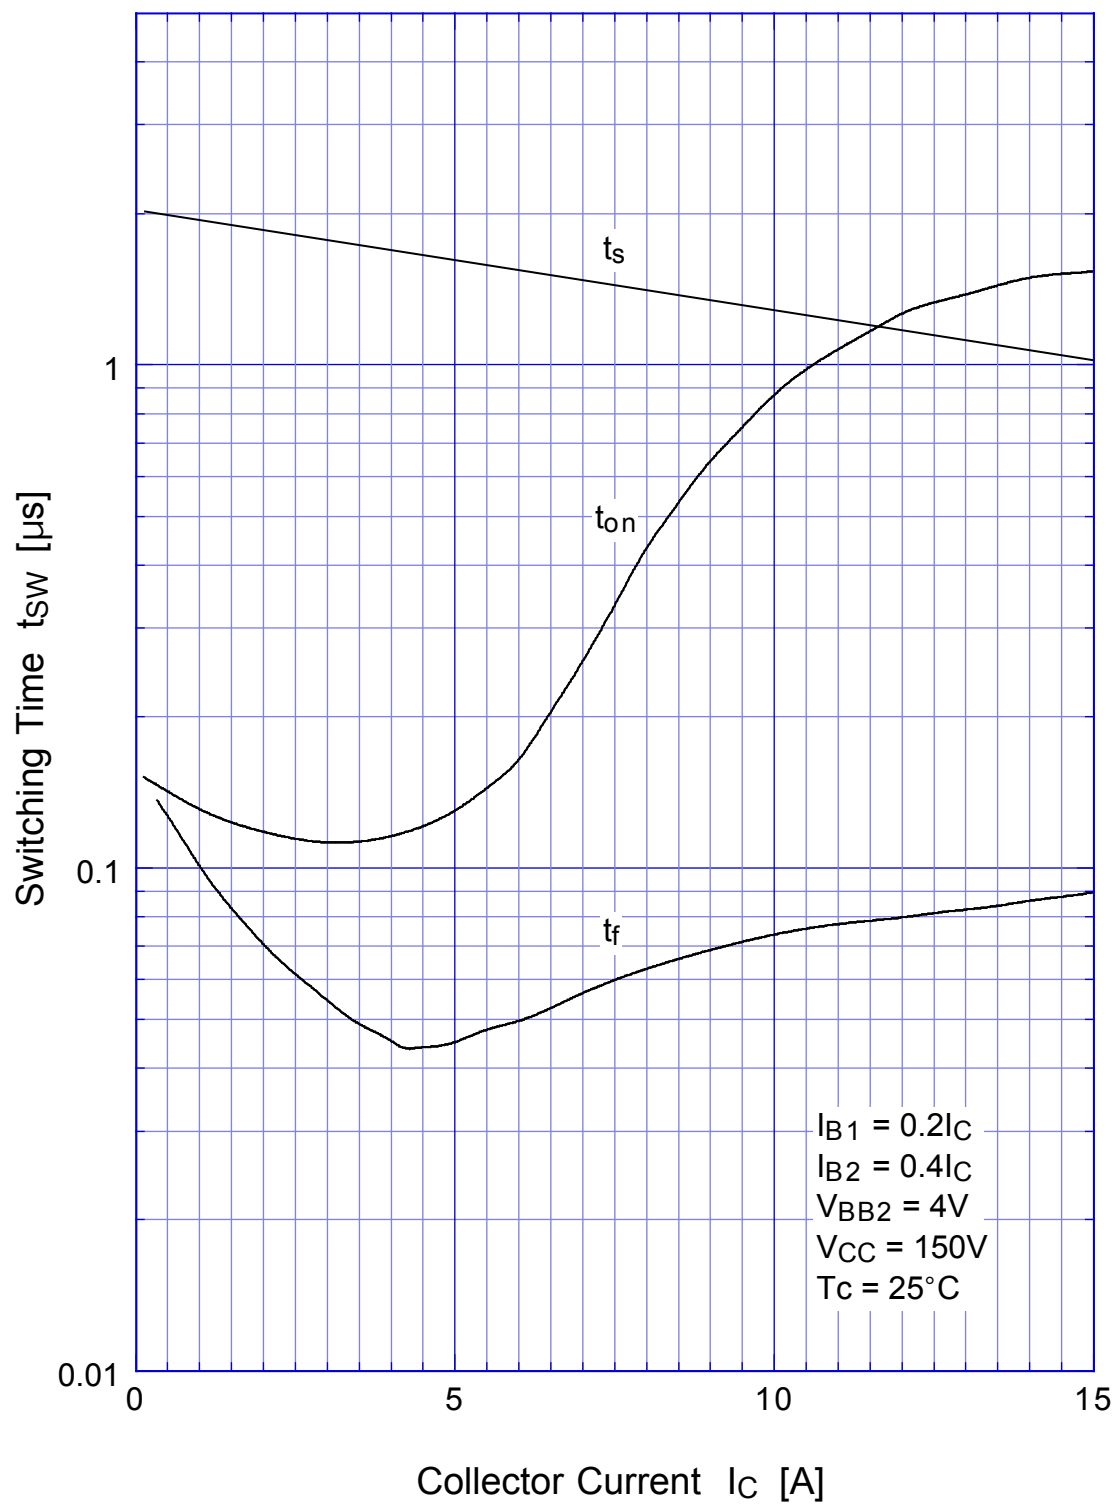


## 2SC4582    Switching Time - $V_{CC}$

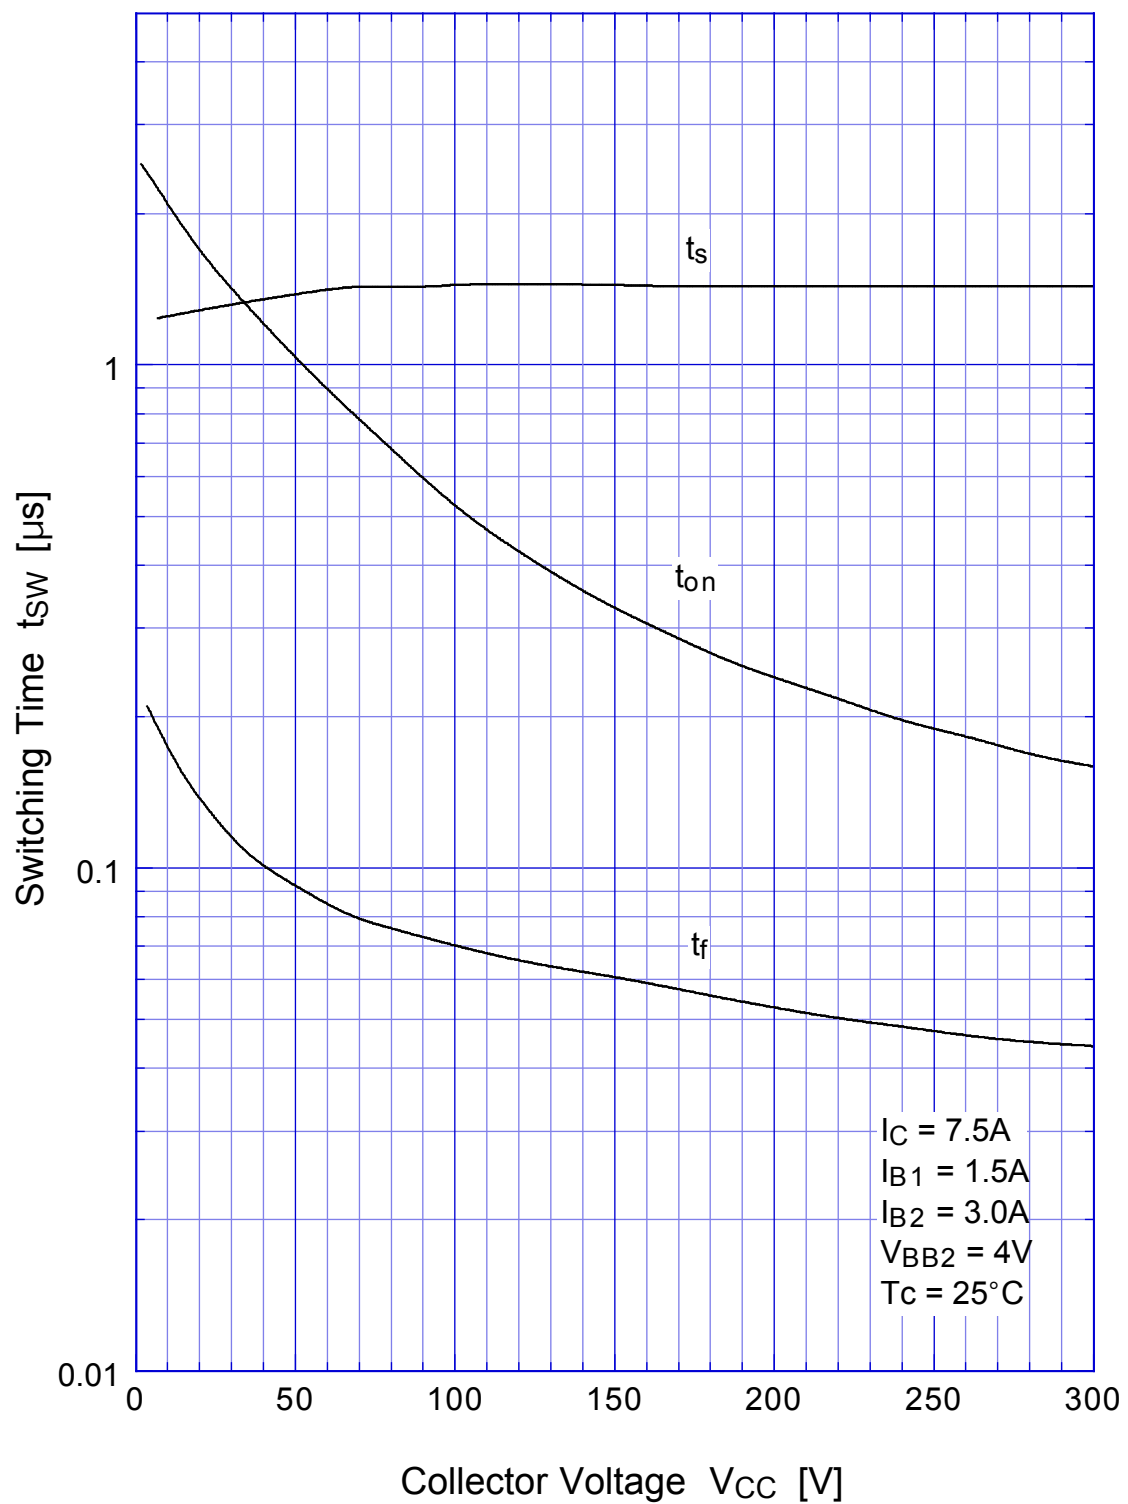


## 2SC4582 Switching Time - Tc

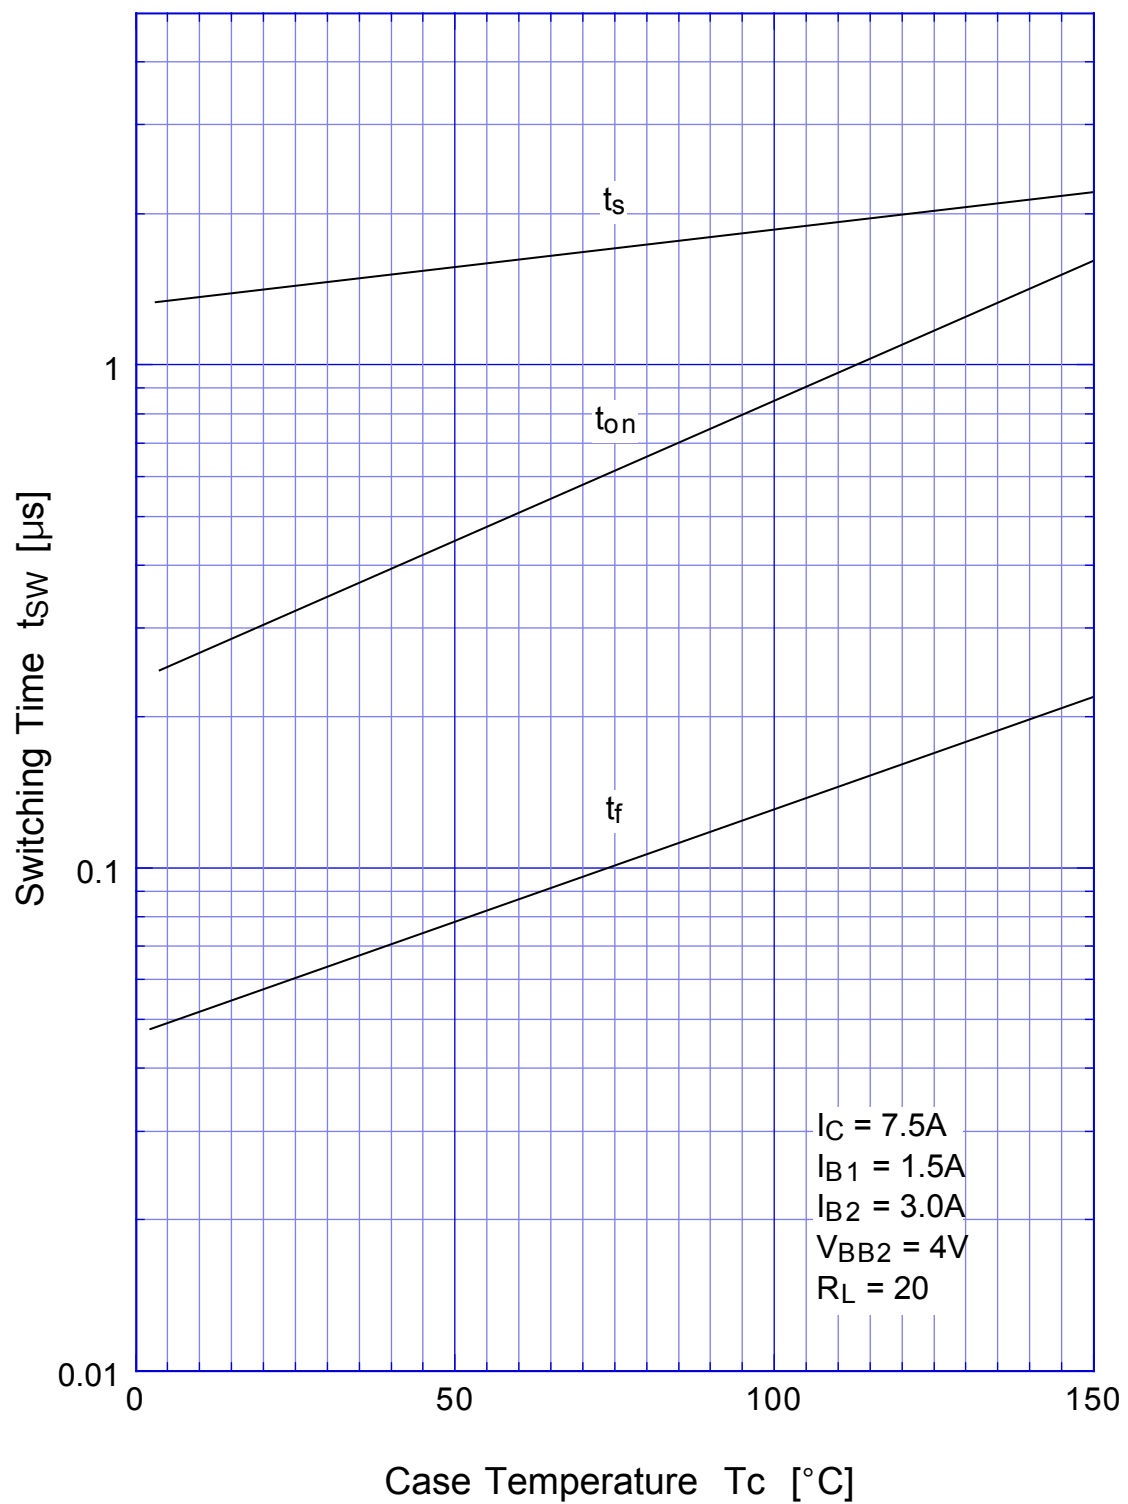

## 2SC4582 Transient Thermal Impedance

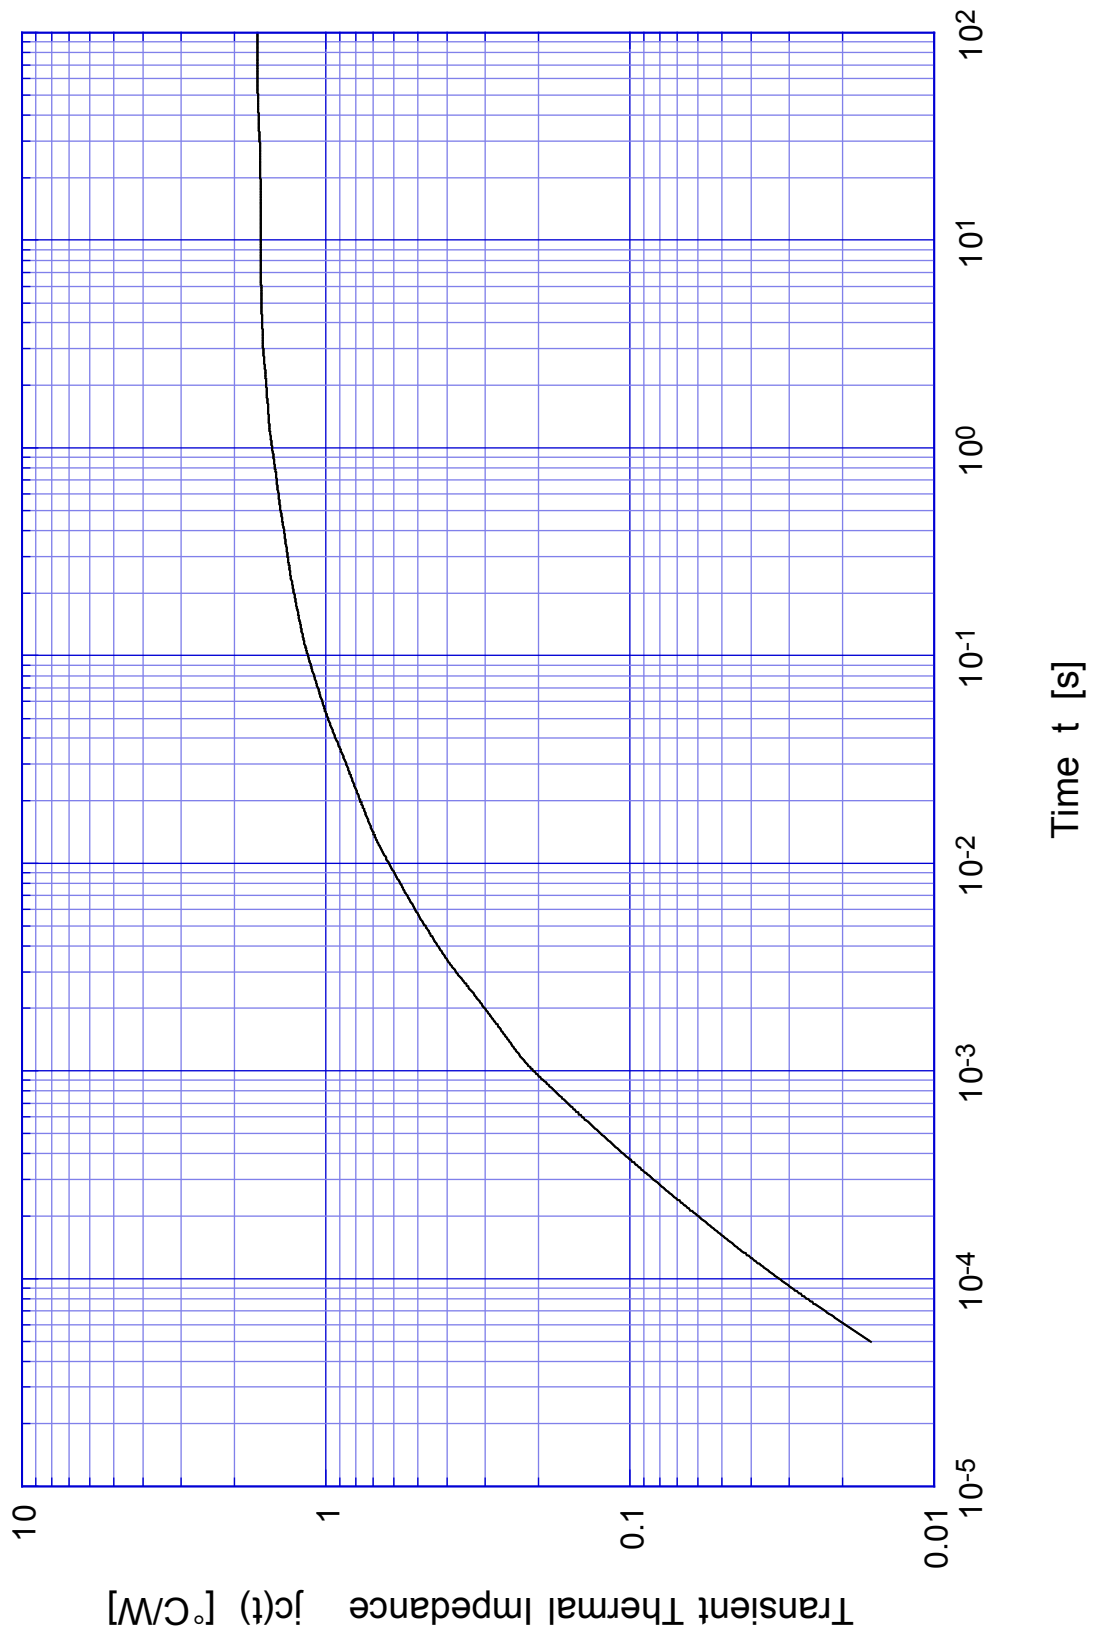


## 2SC4582 Forward Bias SOA

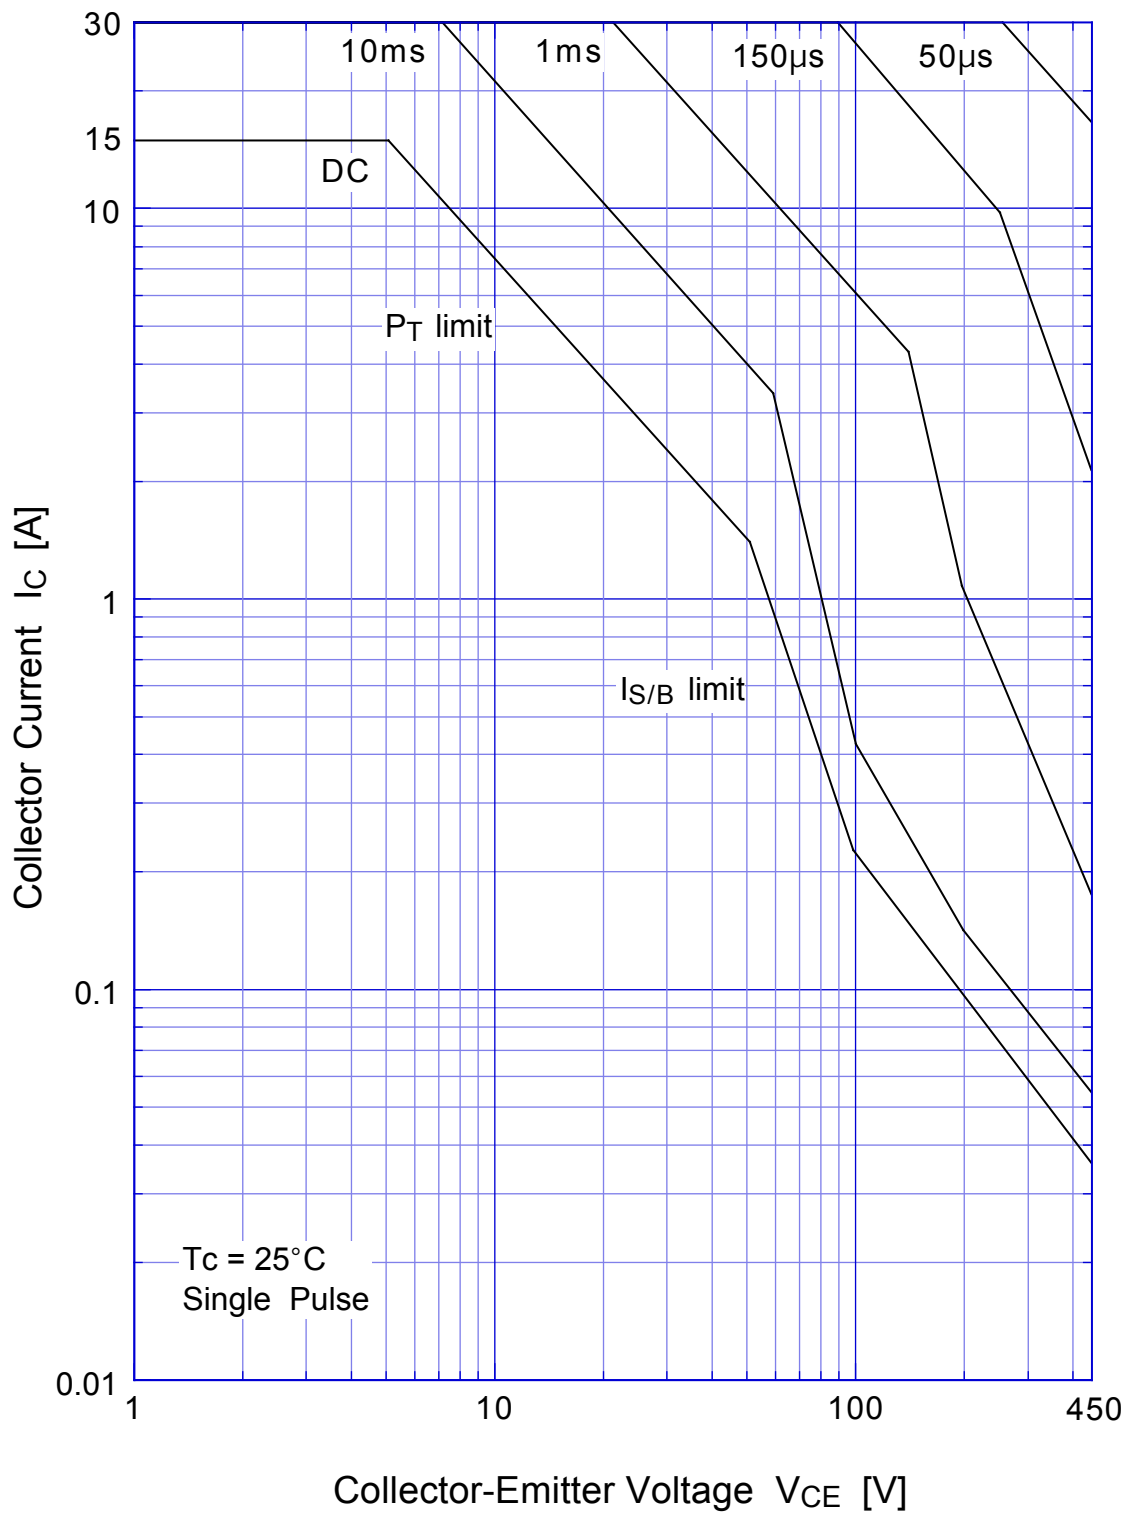



## 2SC4582 Collector Current Derating

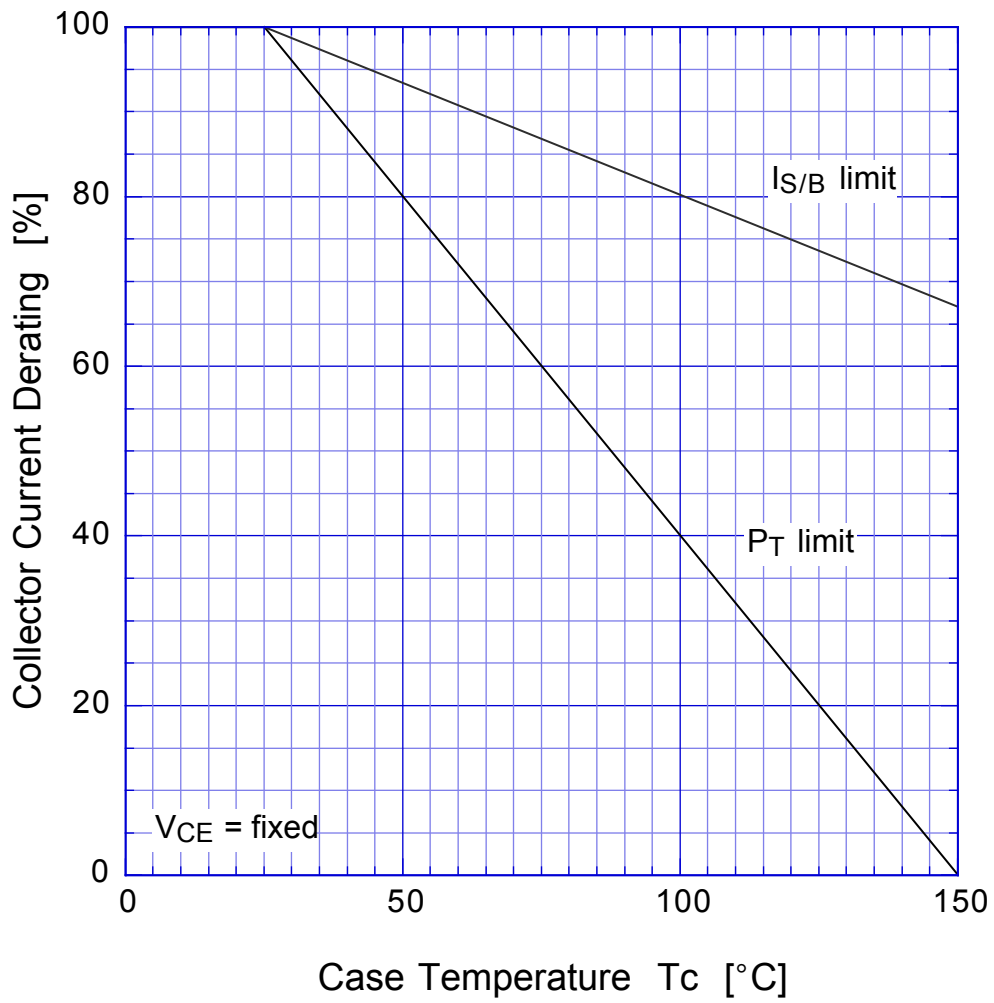

## 2SC4582 Reverse Bias SOA

