
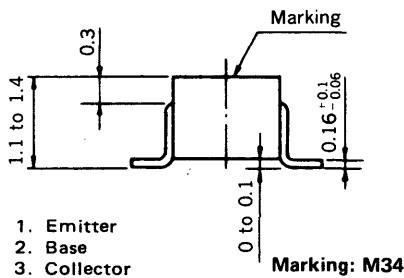


MEDIUM SPEED SWITCHING
RESISTOR BUILT-IN TYPE PNP TRANSISTOR
MINI MOLD

PACKAGE DIMENSIONS
in millimeters

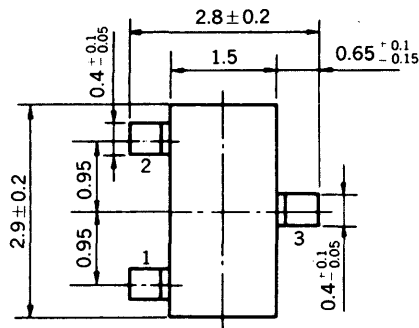


- 1. Emitter
- 2. Base
- 3. Collector

Marking: M34

FEATURES

- Resistors Built-in TYPE

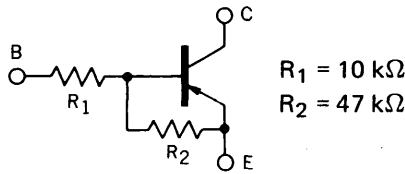

- Complementary to FA1A4P

ABSOLUTE MAXIMUM RATINGS

Maximum Voltages and Currents ($T_a = 25^\circ\text{C}$)

| | | | |
|---|-----------|-------------|------------------|
| Collector to Base Voltage | V_{CBO} | -60 | V |
| Collector to Emitter Voltage | V_{CEO} | -50 | V |
| Emitter to Base Voltage | V_{EBO} | -5 | V |
| Collector Current (DC) | I_C | -100 | mA |
| Collector Current (Pulse) | I_C | -200 | mA |
| Maximum Power Dissipation | | | |
| Total Power Dissipation | | | |
| at 25°C Ambient Temperature | P_T | 200 | mW |
| Maximum Temperatures | | | |
| Junction Temperature | T_j | 150 | $^\circ\text{C}$ |
| Storage Temperature Range | T_{stg} | -55 to +150 | $^\circ\text{C}$ |

ELECTRICAL CHARACTERISTICS ($T_a = 25^\circ\text{C}$)

| CHARACTERISTIC | SYMBOL | MIN. | TYP. | MAX. | UNIT | TEST CONDITIONS |
|------------------------------|-----------------|------|-------|------|---------------|---|
| Collector Cutoff Current | I_{CBO} | | | -100 | nA | $V_{CB} = -50\text{ V}, I_E = 0$ |
| DC Current Gain | h_{FE1}^* | 85 | 140 | 340 | | $V_{CE} = -5.0\text{ V}, I_C = -5.0\text{ mA}$ |
| DC Current Gain | h_{FE2}^* | 95 | 190 | | | $V_{CE} = -5.0\text{ V}, I_C = -50\text{ mA}$ |
| Collector Saturation Voltage | $V_{CE(sat)}^*$ | | -0.04 | -0.2 | V | $I_C = -5.0\text{ mA}, I_B = -0.25\text{ mA}$ |
| Low-Level Input Voltage | V_{IL}^* | | -0.68 | -0.5 | V | $V_{CE} = -5.0\text{ V}, I_C = -100\text{ }\mu\text{A}$ |
| High-Level Input Voltage | V_{IH}^* | -3.0 | -1.0 | | V | $V_{CE} = -0.2\text{ V}, I_C = -5.0\text{ mA}$ |
| Input Resistor | R_1 | 7.0 | 10.0 | 13.0 | k Ω | |
| E-B Resistor | R_2 | 32.9 | 47.0 | 61.1 | | |
| Turn-on Time | t_{on} | | 0.08 | 0.2 | μs | $V_{CC} = -5\text{ V}, V_{in} = -5\text{ V}$ $R_L = 1\text{ k}\Omega$ $PW = 2\text{ }\mu\text{s}, \text{Duty Cycle} \leq 2\%$ |
| Storage Time | t_{stg} | | 1.5 | 5.0 | μs | |
| Turn-off Time | t_{off} | | 1.8 | 6.0 | μs | |

* Pulsed: $PW \leq 350\text{ }\mu\text{s}$, Duty Cycle $\leq 2\%$

TYPICAL CHARACTERISTICS ($T_a = 25^\circ\text{C}$)

