



Sparkle Power Inc.
 A Leading Power Supply Manufacturer
 Web site: www.sparklepower.com

SPI220LE5
(80PLUS, RoHS Compliant)
220/250 Watts Flex ATX Switching Power Supply



Features

- Complied with Flex ATX and ATX12V standard
- Active Power Factor Correction (PFC) meet EN61000-3-2
- High efficiency and reliability
- Compatible with European Union Directive 2002/95/EC (Restriction on Hazardous Substances).
- Remote ON/OFF function
- Internal 12V DC fan included
- Noise Killer (thermal fan speed control function)
- Low noise and ripple
- Output over voltage, short circuit, and over current protection
- 100% Hi-pot, ATE, and burn-in tested
- Re-settable power shut down
- Complies with FCC part 15 subpart J class B 115Vac operation, and CISPR 22 class B at 230Vac operation
- Approved by CUL/UL60950-1, TUV EN60950-1, NEMKO EN60950-1(CB Report) CE

Input Characteristics

Input Range: 90 ~ 264Vac, Full Range Input
Frequency: 47 ~ 63Hz
Input Current: Max 5A @ 115Vac, 3A @ 230Vac
Inrush Current: No damage.

Output Characteristics

Specification


- **Temperature Range:** Operating 0° C ~ +25° C on 250W output load or 0° C ~ +50° C on 220W output load ; storage & shipping -20° C ~ +80° C
- **Humidity:** 5 ~ 90% on operating, 5 ~ 95% on storage
- **Dielectric Withstand:** Primary frame ground 1800V AC for 1 second
- **Efficiency:** typical up to **80%**
- **Rise time:** Less than 20ms
- **Hold-up Time:** 17ms minimum at nominal input voltage
- **Power Good Signal:** Power on delay time 100 ~ 500ms, off delay 1ms minimum (TTL and CMOS compatible)
- **Leakage Current:** Less than 3.5mA at 264Vac, 50Hz
- **MTBF:** 100,000 hours on maximum load at +25° C
- **Dimensions (LxWxH):** 150x81.5x43mm / 6x3.2x1.7inch

Output Voltage	Minimum Load	Normal Load	Maximum Load	Load Reg.	Line Reg.	Ripple & Noise
+3.3V	0.5A	7A	14A	± 5%	± 1%	50mV P-P
+5V	0.5A	8A	16A	± 5%	± 1%	50mV P-P
+12V1	1.0A	8A	16A	± 5%	± 1%	120mV P-P
+12V2	1.0A	5A	10A	± 5%	± 1%	100mV P-P
-12V	0.0A	0.4A	0.8A	± 10%	± 1%	120mV P-P
+5Vsb	0.0A	1.25A	2.5A	± 5%	± 1%	50mV P-P

*220W (50°C): +3.3V, +5V, and +12V total output cannot exceed 207W.
 *250W (25°C): +3.3V, +5V, and +12V total output cannot exceed 237W
 *+3.3V and +5V total output not exceed 110W
 * Total output for this subject power supply is 250W

Sparkle Power Inc.
Main Office
 1000 Rock Avenue
 San Jose, CA 95131
 TEL: 408-519-8888
 FAX: 408-519-9999
 E-MAIL: info@sparklepower.com

Sparkle Power Inc.
Los Angeles Office
 17071 Green Drive
 City of Industry, CA 91745
 TEL: 626-839-7180
 FAX: 626-839-3395

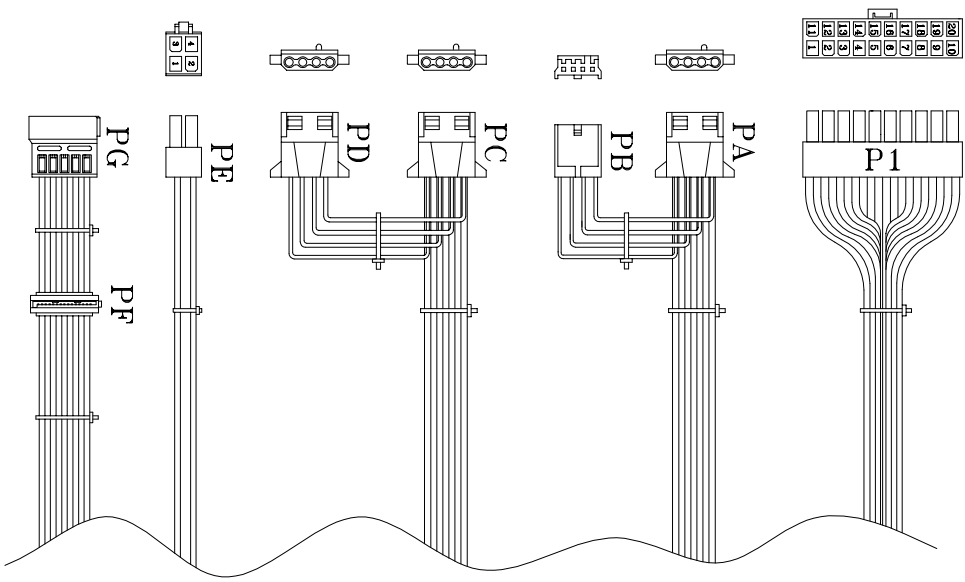


NOTE:

1. ALL THE LENGTH OF OUTPUT WIRES EXCLUDE HOUSING.
2. 產地標籤依業務指示加貼.

PS:80 PLUS

UNIT:mm

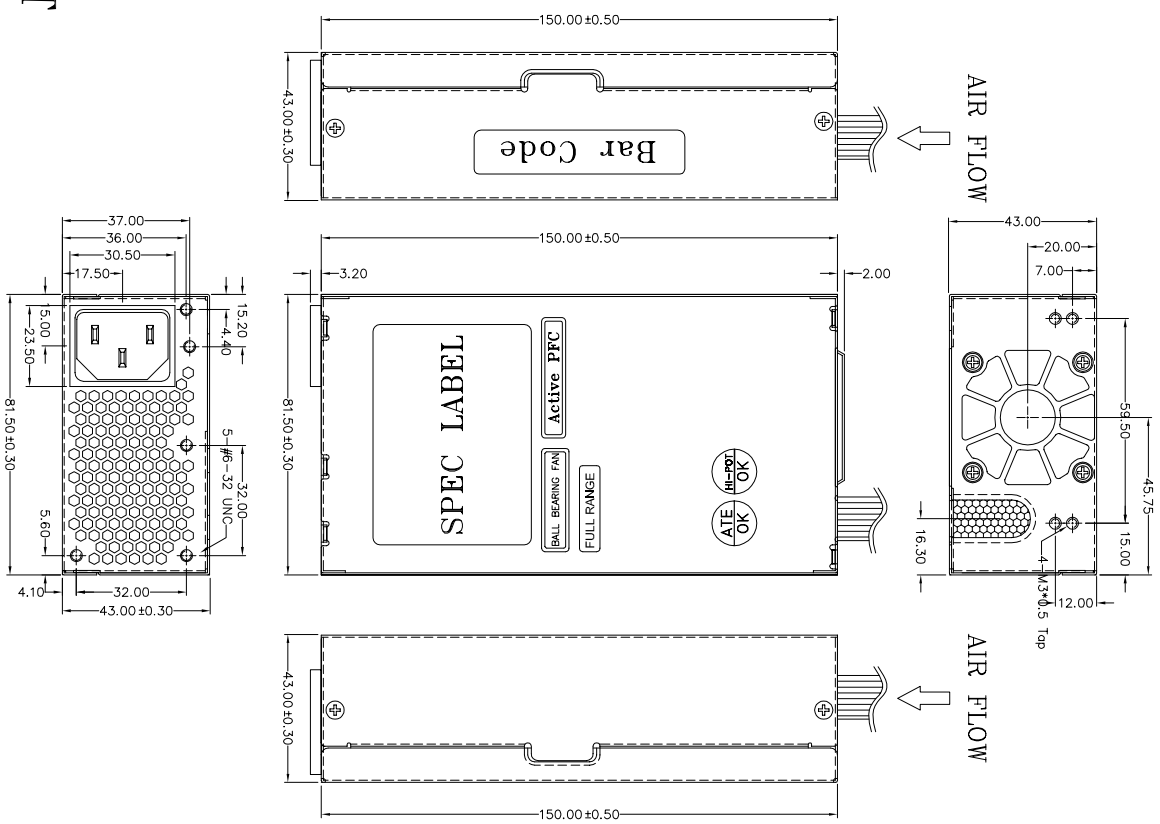

REF. D.	FIN. N°	SIGNAL	WIRE COLOR	GALV.	COMPONENT TYPE	LENGTH
1	1	+3.3V	ORANGE	20	NOLEX	200±15
2	2	+3.3V	ORANGE	20	39-01-	200±15
3	3	COM	BLACK	20	39-01-	200±15
4	4	+5V	RED	20	or EQUIV.	
5	5	COM	BLACK	20		
6	6	+5V	RED	20		
7	7	COM	BLACK	20		
8	8	PM-OK	GRAY	24		
9	9	+5Vsb	PURPLE	20		
10	10	+12V2	YELLOW	20		
11	11	+3.3V	ORANGE	20		
12	12	+3.3V	BROWN	24		
13	13	-12V	BLUE	24		
14	14	PS-ON	GREEN	24		
15	15	COM	BLACK	20		
16	16	COM	BLACK	20		
17	17	COM	BLACK	20		
18	18	COM	BLACK	20		
19	19	+5V	RED	20		
20	20	+5V	RED	20		
P1						
1	1	+12V2	YELLOW	20	AMP	250±15
2	2	COM	BLACK	20	1-46044-0	150±10
3	3	COM	BLACK	20	or EQUIV.	
4	4	+5V	RED	20		
PA						
1	1	+12V2	YELLOW	20	AMP	310±15
2	2	COM	BLACK	20	1-46044-0	150±10
3	3	COM	BLACK	20	or EQUIV.	
4	4	+5V	RED	20		
PC						
1	1	+12V2	YELLOW	20	AMP	150±10
2	2	COM	BLACK	20	171822-4	150±10
3	3	COM	BLACK	20	or EQUIV.	
4	4	+5V	RED	20		
PB						
1	1	+12V2	YELLOW	20	AMP	150±10
2	2	COM	BLACK	20	1-46044-0	150±10
3	3	COM	BLACK	20	or EQUIV.	
4	4	+5V	RED	20		
PD						
1	1	+12V2	YELLOW	20	AMP	150±10
2	2	COM	BLACK	20	1-46044-0	150±10
3	3	COM	BLACK	20	or EQUIV.	
4	4	+5V	RED	20		
PE						
1	1	+12V1	Yel/Blk	20	NOLEX	310±15
2	2	COM	BLACK	20	2041-	310±15
3	3	+12V1	Yel/Blk	20	2041-	310±15
4	4	+12V1	Yel/Blk	20	or EQUIV.	
PG						
1	1	COM	BLACK	20	CL271H90	310±15
2	2	COM	BLACK	20	1-EP	310±15
3	3	+5V	RED	20		
4	4	COM	BLACK	20		
5	5	+3.3V	ORANGE	20		
PF						
1	1	+12V2	YELLOW	20	CL271H90	150±10
2	2	COM	BLACK	20	1-EP	150±10
3	3	+5V	RED	20		
4	4	COM	BLACK	20		
5	5	+3.3V	ORANGE	20		

FSP P/N.:9PA220****
SPI P/N.:SPI220LE5

MODEL NO. : SPI220LE5	TITLE: ASSY	SHEET: 1 OF 1	REV:01
R&D	PF	DRAWN	DATE
INTERIOR COUNTERSIGN:			Nov.14.2006
			樂家龍