
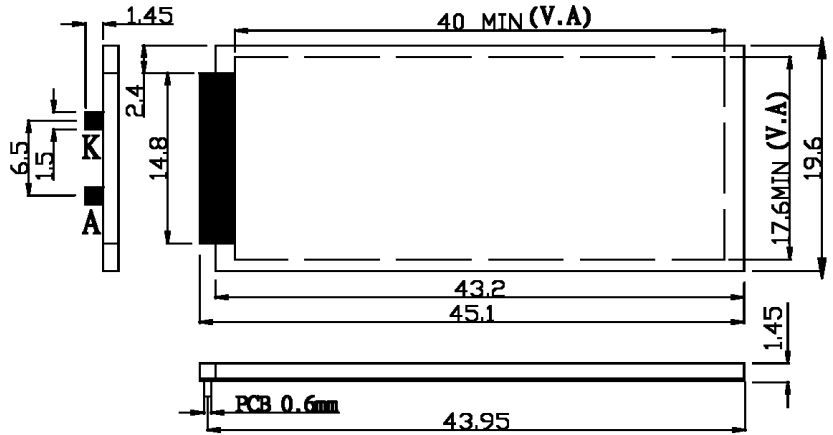


**Features**

Design flexibility – Available in a variety sizes and colors to suit most any application.  
 Durable Acrylic Panel – Offers sturdy mechanical support and device stability.  
 Long lifetimes – Typically 100k hours.  
 Low power consumption – Uses far less power than standard incandescent EL or CCFL light sources.

**Applications**

Backlighting LCD Displays; Panels and Symbols  
 Illumination of Large Surface Areas

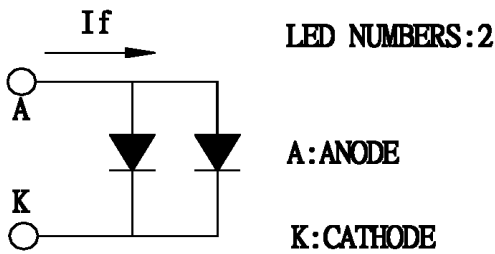

**Electrical and Optical Characteristics (Ta=25°C)**

Part Number	PWL nm λP	Material	View Angle 2θ1/2	Luminous Intensity Iv				Forward Voltage VF			
				min.	typ.	max.	IF@	min.	typ.	max.	IF@
MTBL2237-G	574	InGaAlP	-	-	30.00	-	60mA	-	2.00	-	60mA
-	nm	-	deg	mcd				-	V		-

**Company Headquarters**  
 3 Northway Lane North  
 Latham, New York 12110  
 Toll Free: 800.984.5337  
 Fax: 518.785.4725

**West Coast Sales Office**  
 950 South Coast Drive, Suite 225  
 Costa Mesa, California 92626  
 Toll Free: 800.984.5337  
 Fax: 714.850.9314