

**Features**

- Frequency Range 1700 – 2500 MHz
- Low Cost
- Industry Standard SMT package
- Available in Tape-and -Reel
- 50 Ohms Characteristic Impedance

**Description**

The SPA-2501-25 is a 0° In-phase two way power splitter designed for applications that require small, low cost and highly reliable surface mount components. Applications may be found in broadband, wireless and other communications systems. S-Parameters are available on request.

**SURFACE MOUNT 2-WAY SPLITTER**



**Specifications**


Parameter	Minimum	Typical	Maximum
Frequency Range (MHz)	1700		2500
Insertion Loss (dB)		0.8	1.4
Isolation (dB)	16	25	
Return Loss (dB)		14	9.8
Amplitude Balance (dB)		0.2	0.5
Phase Balance (Degrees)		3.0	9.0

**Absolute Maximum Ratings**


Parameter	Maximum
RF Power	+33 dBm
Operating Temperature	-55 to +100 °C
Storage Temperature	-55 to +100 °C
Re-flow Temperature	+ 240 °C

Note: Typical values represent Mid-band performance @ 25°.

**Schematic**

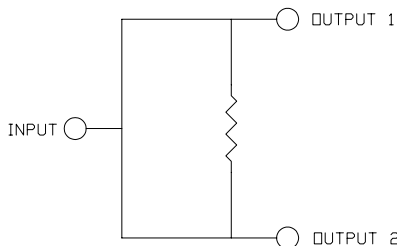


**Package – S06**

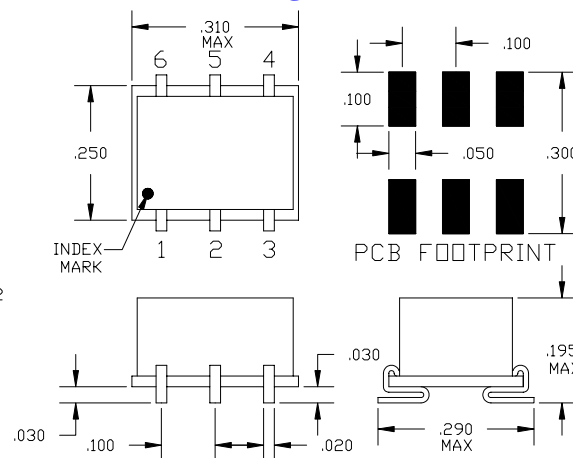


**Pin Functions**

Function	Pin
INPUT	1
OUTPUT 1	3
OUTPUT 2	4
GROUND	2,5,6

Typical Test Data – Insertion Loss and Amplitude Balance

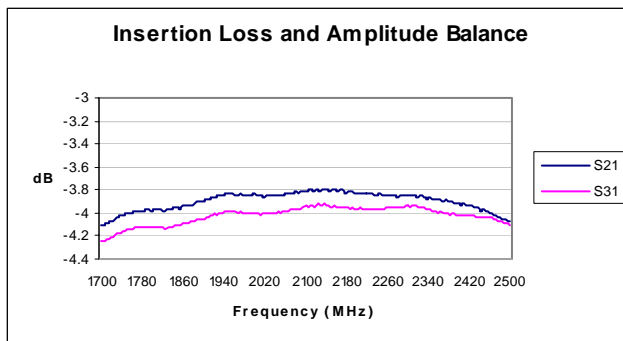

Typical Test Data – VSWR and Output Isolation

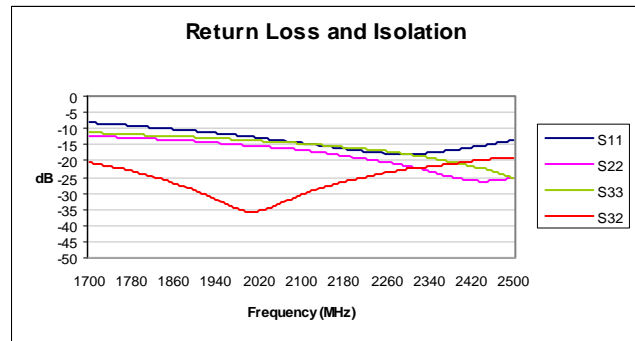

Specifications and information on this data sheet are subject to change without notice..

1860 Hartog Drive, San Jose, California 95131 USA  
Leffelholzstr. 20, D-90441, Nurnberg, Germany  
2/1-2F, No.99 Lane 2535 Gudai Rd, Shanghai, China PC 201100

Tel: 001-408-436-7720  
Tel: +49(0)911/9411 233  
Tel: (86)21-5416-8648

Fax: 001-408-436-7689  
Fax: +49(0)911/9411 198  
Fax: (86)21-5416-8753

Email: [Sales@premierdevices.com](mailto:Sales@premierdevices.com)  
Email: [Sales.germany@premierdevices.com](mailto:Sales.germany@premierdevices.com)  
Email: [Sales.china@premierdevices.com](mailto:Sales.china@premierdevices.com)