

Features

- Frequency Range:5 MHz to 1000MHz
- Low Cost and RoHS Compliant
- Industry Standard SMT Package
- Available in Tape-and-Reel
- 75Ω Characteristic Impedance

Product Description




The SPA-1002-27H is a 0° two way power splitter designed for applications that require small, low cost and highly reliable surface mount components. Applications may be found in broadband, wireless, and other communications systems. These units are built Lead-Free and RoHS Compliant. S-Parameters are available on request.





Specifications

| Parameter | Specification | | | Unit |
|-------------------|---------------|------|------|------|
| | Min. | Typ. | Max. | |
| Frequency Range | 5 | | 1000 | MHz |
| Insertion Loss | | 0.5 | 1.2 | dB |
| Isolation | 18 | 30 | | dB |
| Return Loss | 17.7 | 23 | | dB |
| Amplitude Balance | | 0.1 | 0.4 | dB |
| Phase Balance | | 1.0 | 3.0 | ° |

Note: Typical values represent midband performance at T=25 °C.

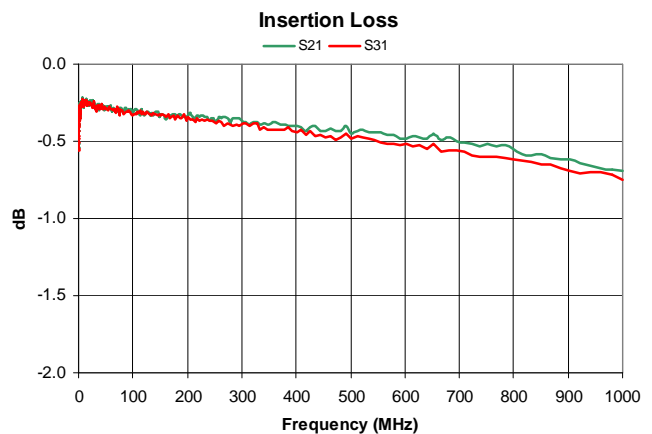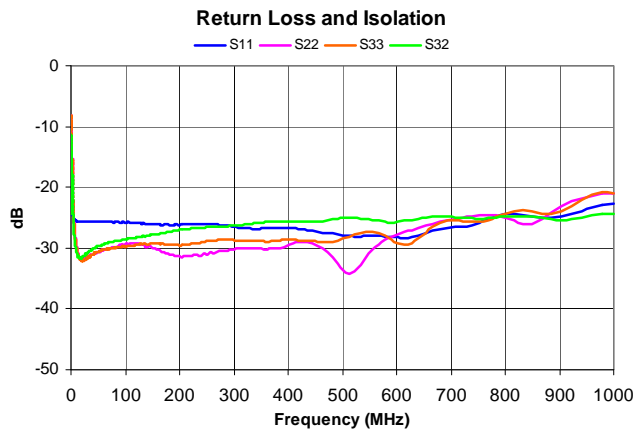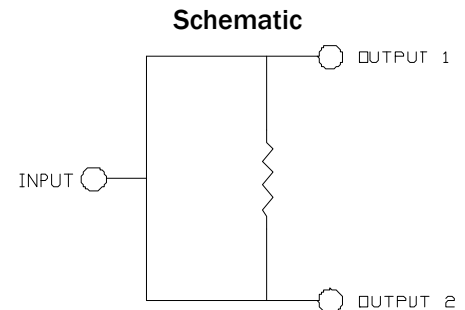

RF MICRO DEVICES®, RFMD®, Optimum Technology Matching®, Enabling Wireless Connectivity™, PowerStar®, POLARIS™ TOTAL RADIO™ and UltimateBlue™ are trademarks of RFMD, LLC. BLUETOOTH is a trademark owned by Bluetooth SIG, Inc., U.S.A. and licensed for use by RFMD. All other trade names, trademarks and registered trademarks are the property of their respective owners. ©2006, RF Micro Devices, Inc.

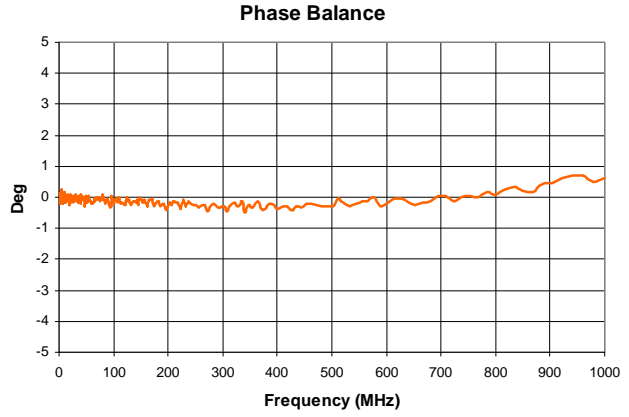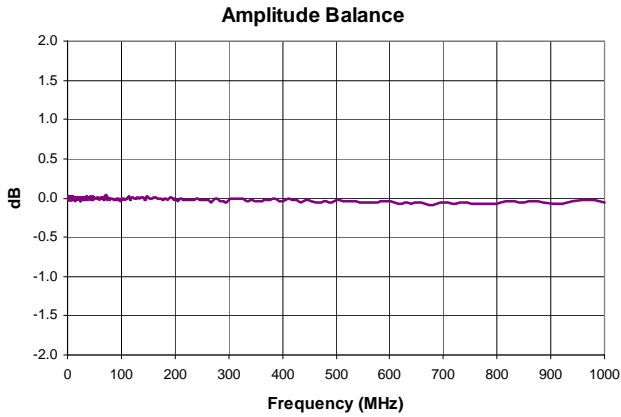


Pin Out

| Pin | Name |
|---------|----------|
| 1 | Input |
| 3 | Output 1 |
| 4 | Output 2 |
| 2, 5, 6 | Ground |

Absolute Maximum Ratings

| Parameter | Rating | Unit |
|-----------------------|-------------|------|
| RF Power | +33 | dBm |
| Operating Temperature | -55 to +100 | °C |
| Storage Temperature | -55 to +100 | °C |

Package Drawing - S06

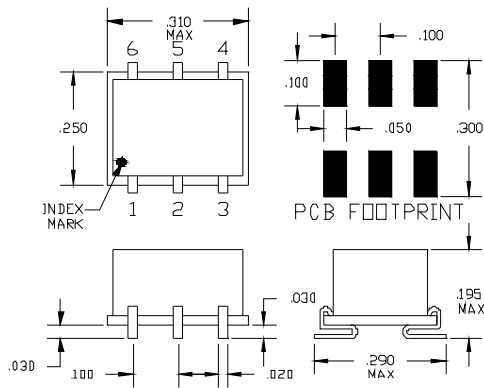

Exceeding any one or a combination of the Absolute Maximum Rating conditions may cause permanent damage to the device. Extended application of Absolute Maximum Rating conditions to the device may reduce device reliability. Specified typical performance or functional operation of the device under Absolute Maximum Rating conditions is not implied.

RoHS status based on EUDirective2002/95/EC (at time of this document revision).

The information in this publication is believed to be accurate and reliable. However, no responsibility is assumed by RF Micro Devices, Inc. ("RFMD") for its use, nor for any infringement of patents, or other rights of third parties, resulting from its use. No license is granted by implication or otherwise under any patent or patent rights of RFMD. RFMD reserves the right to change component circuitry, recommended application circuitry and specifications at any time without prior notice.