


UNAUTHORIZED USE OF THIS DRAWING IS STRICTLY PROHIBITED

DAR	REV	DESCRIPTION	APPVD	DATE
2236	A	INITIAL RELEASE	TJD	1-10

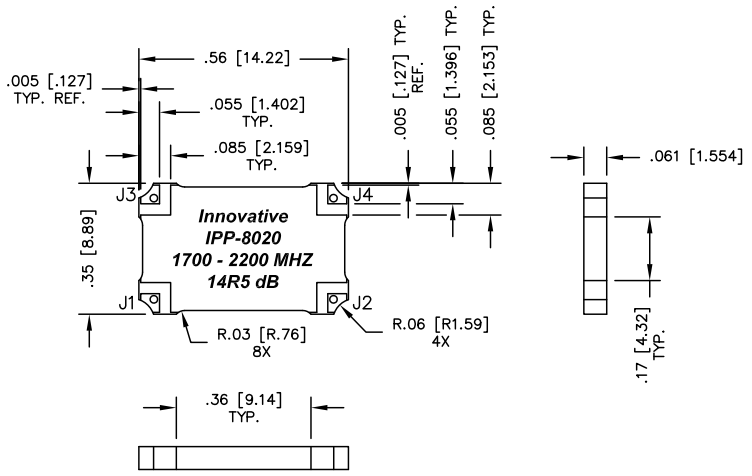

FINISH	
P/N	TYPE
IPP-8020	TIN/LEAD
IPP-8020RT	RoHS MATTE TIN
IPP-8020RG	RoHS NICKEL GOLD

- NOTES:**
1. SEE SMD COUPLER APPLICATION NOTE FOR FURTHER INFORMATION.
 2. PARTS WITH RoHS MATT TIN AND RoHS NICKEL GOLD FINISHES ARE RoHS COMPLIANT.
 3. AVAILABLE IN TAPE AND REEL. SEE SMD COUPLER APPLICATION NOTE FOR FURTHER INFORMATION.

ELECTRICAL SPECIFICATIONS

FREQUENCY:	1700 – 2200 MHz.
INSERTION LOSS:	<0.25 dB
VSWR:	<1.30:1
COUPLING:	14.5dB ±0.75 dB
DIRECTIVITY:	>22 dB
COUPLED FLATNESS:	±0.75 dB
POWER:	150 WATT
TEMPERATURE:	-55°C TO 100°C

PORT CONFIGURATION			
INPUT	OUTPUT	FORWARD COUPLED	REFLECTED COUPLED
J1	J2	J3	J4 ADD 50Ω TERMINATION
J1	J2	J3 ADD 50Ω TERMINATION	J4
J2	J1	J4	J3 ADD 50Ω TERMINATION
J2	J1	J4 ADD 50Ω TERMINATION	J3

MATERIAL	DWN S.Cornell	DATE 12-1-09	
FINISH	ENG TJD	DATE 12-1-09	
SEE FINISH CHART	MANUF RR	DATE 12-1-09	
TOLERANCE	CAGE CODE: 437R2		TITLE
.xx ±.02 [.50]	SHEET 1 OF 1	SCALE 4:1	OUTLINE, SMD COUPLER
.xxx ±.010 [.254]			SDC, 1700 - 2200 MHz. 14.5dB 150W
ANG. ±1/2°			SIZE B P/N IPP-8020*
			REV. A