
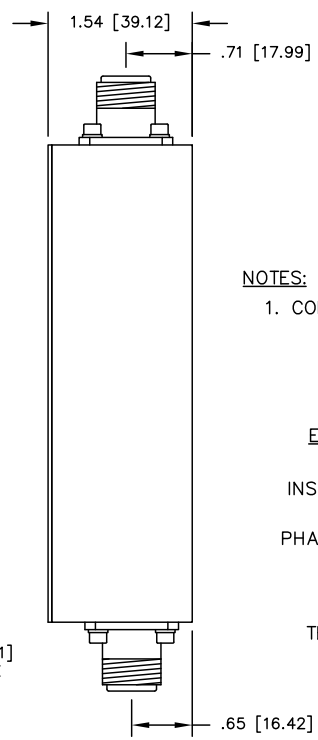


UNAUTHORIZED USE OF THIS  
DRAWING IS STRICTLY PROHIBITED

DAR	REV	DESCRIPTION	APPVD	DATE
1453	A	INITIAL RELEASE	DG	6-08

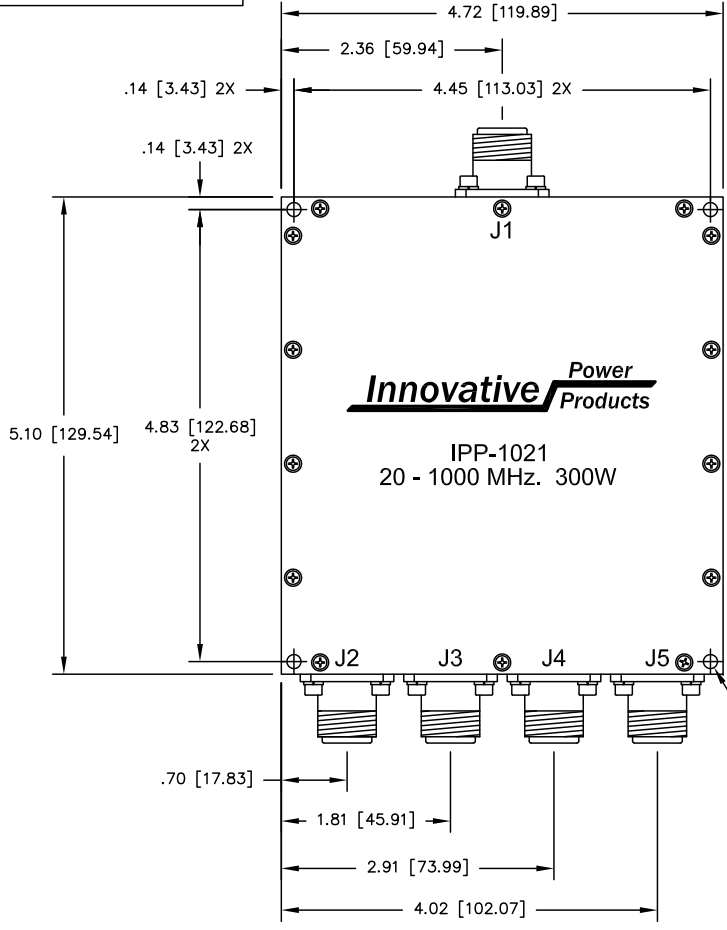

NOTES:  
1. CONNECTORS: J1 - J5 TYPE "N" FEMALE.

**ELECTRICAL SPECIFICATIONS**  
 FREQUENCY: 20 - 1000 MHz.  
 INSERTION LOSS: < 0.75 dB  
 VSWR: < 1.25:1  
 PHASE BALANCE: ±5°  
 POWER: 300 WATT  
 ISOLATION: >12dB 20-125 MHz.  
 >15dB 125-1000 MHz.  
 TEMPERATURE: -55°C TO 85°C

MATERIAL	AL. ALLOY 6061-T651	DWN	DG	DATE	5-08	<b>Innovative Power Products</b>
FINISH	CHEM FILM CLEAR IRRIDITE	ENG	TJD	DATE	5-08	
TOLERANCE	.XX ±.02 .XXX ±.010 ANG. ±1/2°	CAGE CODE: 437R2		TITLE		OUTLINE
		SHEET	OF	SCALE	1:1	4 - WAY 20 - 1000 MHz 300 WATT
		1	1			SIZE B P/N
						IPP-1021
						REV. A